


APPROVED: _____

DATE: _____ TITLE: _____




Rev	AWO #	Description	Date	Appr
-		RELEASED	3/15/23	
A		UPDATE DRAWING	3/24/23	LH/RC

Part Number	Nominal Size(mm)	busbar dimension	As supplied(mm)	After recovered(mm)		Applicable busbar dimension (mm)		Standard Length (Meter)
			I.D.(min) (D)	I.D.(max) (d)	W.T.(w)	L+T(min)(max)	R(min)(max)	
HST-B-025-RD-X-36KV	25	20x3, 25x3	25	10	4.0±0.3	17~28	11~20	(Whole Reel) 15 Meter
HST-B-040-RD-X-36KV	40	30x10, 40x4	40	16	4.0±0.3	28~45	18~32	
HST-B-065-RD-X-36KV	65	50x8, 50x10, 60x6, 60x8	65	25	4.0±0.3	44~69	28~47	
HST-B-075-RD-X-36KV	75	60x10, 80x6, 80x8 80x10	75	25	4.0±0.3	45~94	29~60	
HST-B-100-RD-X-36KV	100	100x8, 100x10, 100x12	100	40	4.0±0.3	69~102	44~72	
HST-B-120-RD-X-36KV	120	100x15, 120x10 120x12, 120x15	120	40	4.0±0.3	85~125	56~95	(Whole Reel) 1 Meter
HST-B-180-RD-X-36KV	180	150x10, 150x20	180	58	4.0±0.3	133~196	85~125	

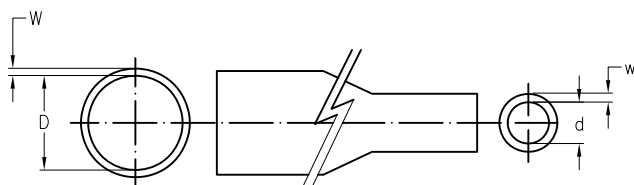

BEFORE SHRINKING

AFTER SHRINKING

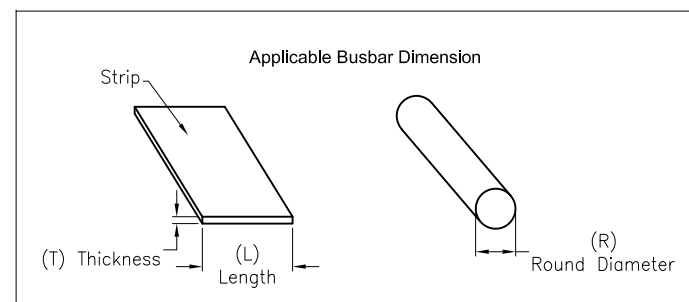

HST-B-XXX-RD-X-36KV

TYPE SEE CHART

Color= RED

Length
R= Whole Reel
A= 1.22 meters

SPECIFICATIONS:
Material: Polyolefin

Electrical:
Shrinkage: 2.5:1
Dielectric withstanding voltage: 36KV
Temperature Rating:
Operating temperature: -45°C to +105°C
Environmental:
Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

DRAWN	WX	3/15/23
CHECKED	RC	3/15/23
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE BUSBAR INSULATING HEAT SHRINK TUBING WITHSTAND VOLTAGE UP TO 36KV		REV. -
SIZE X	PART NO. HST-B-XXX-RD-X-36KV	
REF: S00303T	SCALE: NTS	SHEET 1 OF 1