

#### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo

# PNP Epitaxial Silicon Transistor

#### **Features**

- Audio Power Amplifier
- 3 W Output Application

#### **ABSOLUTE MAXIMUM RATINGS**

(Values are at  $T_A = 25^{\circ}C$  unless otherwise noted.)


Parameter	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	-50	V
Collector–Emitter Voltage	V <sub>CEO</sub>	-50	V
Emitter-Base Voltage	V <sub>EBO</sub>	<b>–</b> 5	V
Collector Current	I <sub>C</sub>	-2	Α
Junction Temperature	$T_J$	150	°C
Storage Temperature	T <sub>STG</sub>	–55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



### ON Semiconductor™

www.onsemi.com



#### **PIN CONNECTIONS**

1. Emitter 2. Collector 3. Base

#### **ORDERING INFORMATION**

See detailed ordering, marking and shipping information on page 2 of this data sheet.

#### THERMAL CHARACTERISTICS (Note 1)

Symbol	Parameter	Value	Unit	
P <sub>D</sub>	Power Dissipation $T_C = 25^{\circ}C$ 1000		mW	
	Derate Above T <sub>A</sub> = 25°C	8.0	mW/°C	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	125	°C/W	

<sup>1.</sup> PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.

#### **ELECTRICAL CHARACTERISTICS** (Note 2) Values are at $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage	$I_C = -1 \text{ mA}, I_E = 0$	-50			V
BV <sub>CEO</sub>	Collector–Emitter Breakdown Voltage	$I_C = -10 \text{ mA}, I_B = 0$	-50			V
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	$I_E = -1 \text{ mA}, I_C = 0$	-5			V
I <sub>CBO</sub>	Collector Cut-Off Current	$V_{CB} = -50 \text{ V}, I_{E} = 0$			-100	nA
I <sub>EBO</sub>	Emitter Cut-Off Current	$V_{EB} = -5 \text{ V}, I_{C} = 0$			-100	nA
h <sub>FE1</sub>	DC Current Gain	$V_{CE} = -2 \text{ V}, I_{C} = -500 \text{ mA}$	120		240	
h <sub>FE2</sub>		$V_{CE} = -2 \text{ V}, I_{C} = -1.5 \text{ A}$	40			
V <sub>BE</sub> (sat)	Base–Emitter Saturation Voltage	$I_C = -1 A, I_B = -0.05 A$			-1.2	٧
V <sub>CE</sub> (sat)	Collector–Emitter Saturation Voltage	$I_C = -1 \text{ A}, I_B = -0.05 \text{ A}$			-0.5	V
C <sub>ob</sub>	Output Capacitance	$V_{CB} = -10 \text{ V}, I_E = 0, f = 1 \text{ MHz}$		40		pF
f <sub>T</sub>	Current Gain Bandwidth Product	$V_{CE} = -2 \text{ V}, I_{C} = -500 \text{ mA}$		100		MHz

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Pulse test: pulse width  $\leq 300~\mu s$ , duty cycle  $\leq 2.0\%$ .

#### **ORDERING INFORMATION**

Part Number	Top Mark	Package	Packing Method	
KSA1281YTA	A1281 Y-	TO-92 3L	Ammo	

#### **Typical Performance Characteristics**




Figure 1. Static Characteristic




Figure 2. Base-Emitter Saturation Voltage




Figure 3. Collector-Emitter Saturation Voltage




Figure 4. Base-Emitter On Voltage




Figure 5. Safe Operating Area






Figure 6. Power Derating

#### **PACKAGE DIMENSIONS**

#### TO-92 3 8.0x4.9 (LEADFORMED)

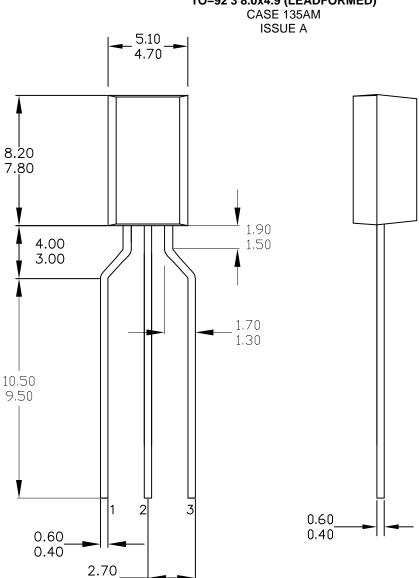



2.30

#### NOTES: UNLESS OTHERWISE SPECIFIED

- THIS PACKAGE IS NOT PRESENTLY REGISTERED WITH ANY STANDARDS COMMITTEE.
   DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR PROTRUSIONS.
   ALL DIMENSIONS ARE IN MILLIMETERS.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnif

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative