

# DIODE MODULE (F.R.D.)

# FDF60BA50/60



UL:E76102(M)

Power Diode Module **FDF60BA** is designed for single phase full wave rectification, which has four fast recovery diodes connected in a single phase bridge configuration. **FDF60BA** is suitable for high frequency application requiring low loss and high speed control.

- High Speed  $t_{rr} \leq 100\text{ns}$
- Output Current, DC60A
- Isolated Mounting base.

**(Applications)**

Switching Power Supply, Inverter Welding Power Supply  
Power Supply for Telecommunication

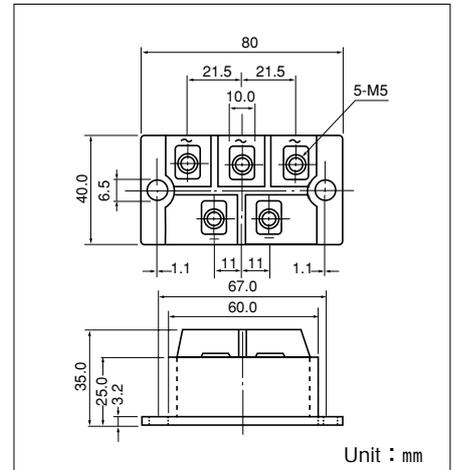

**Maximum Ratings**

( $T_j = 25^\circ\text{C}$  unless otherwise specified)


Symbol	Item	Ratings		Unit
		FDF60BA50	FDF60BA60	
$V_{RRM}$	Repetitive Peak Reverse Voltage	500	600	V
$V_{R(DC)}$	D.C. Reverse Voltage	400	480	V

Symbol	Item	Conditions	Ratings	Unit	
$I_D$	Output current	D.C. $T_c : 80^\circ\text{C}$	60	A	
$I_{FSM}$	Surge Forward Current	$\frac{1}{2}$ cycle, 60Hz, peak value, non-repetitive	600	A	
$I^2t$	$I^2t$	Value for one cycle of surge current	1490	$\text{A}^2\text{S}$	
$T_j$	Operating Junction Temperature		-40 to +150	$^\circ\text{C}$	
$T_{stg}$	Storage Temperature		-40 to +125	$^\circ\text{C}$	
$V_{iso}$	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	2500	V	
	Mounting Torque	Mounting(M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	
	Mass	Typical Value	200	g	


**Electrical Characteristics**

Symbol	Item	Conditions	Ratings		Unit
			Typ.	Max.	
$I_{RRM}$	Repetitive Peak Reverse Current	$V_R = V_{RRM}, T_j = 125^\circ\text{C}$		60	mA
$V_{FM}$	Forward Voltage Drop	$I_F = 60\text{A}$ , Inst. measurement	1.40	1.60	V
$t_{rr}$	Reverse Recovery Time	$I_F = 60\text{A}$ , $-di/dt = 100\text{A}/\mu\text{s}$	85	100	ns
$R_{th(j-c)}$	Thermal Impedance	Junction to case (a module)		0.36	$^\circ\text{C}/\text{W}$


### Forward Characteristics

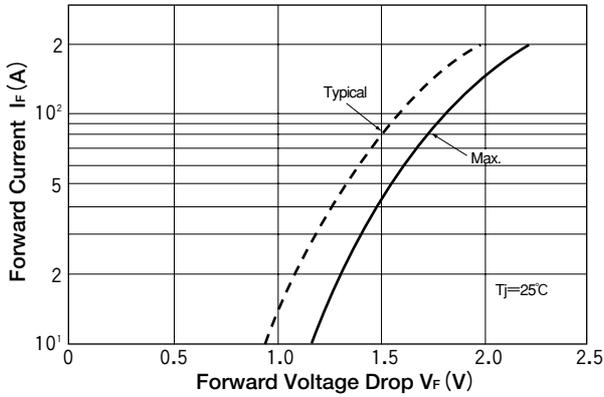


### Cycle Surge Forward Current Rating (Non-Repetitive)

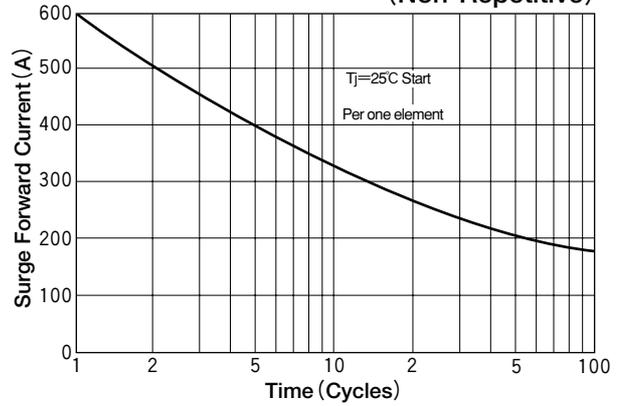


### Transient Thermal Impedance

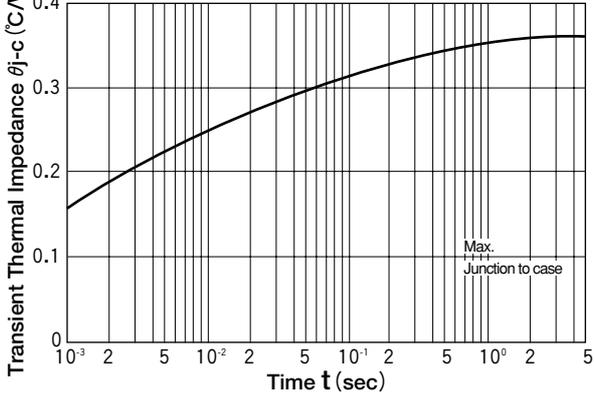

### Reverse Recovery Characteristics

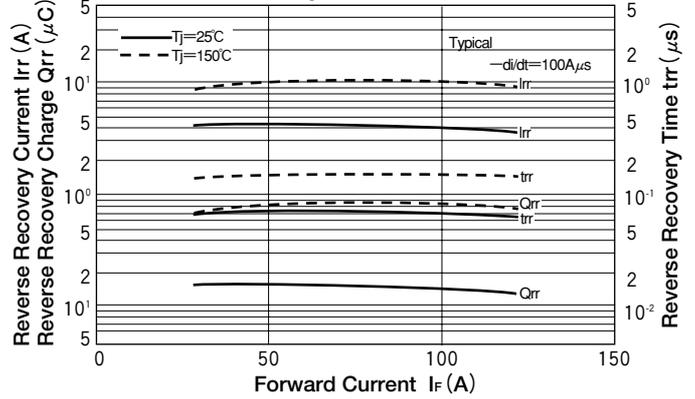

### Reverse Characteristics

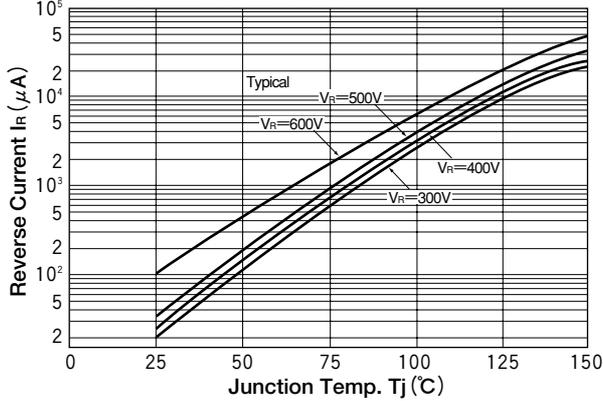

### Reverse Recovery Characteristics

