


Features


- Small Footprint, only 50 x 30 mils.
- Very Low Parasitic Package Inductance, Series Resistance, and Low Package Capacitance
- RoHS* Compliant

Description

The SMGS11 is a GaAs Schottky diode in a molded plastic DFN package. It is designed for broadband detector and single diode mixer. It is in single configuration. It has a high cutoff frequency and can be used beyond 26.5 GHz.



Case 0503 - Molded Plastic DFN Package



Electrical Specifications: $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Forward Voltage (V_F)	$I_R = 1 \text{ mA}$	mV	620	—	760
Total Capacitance (C_T)	$V_R = 0 \text{ V}, 1 \text{ MHz}$ $V = 0 \text{ V}, >4 \text{ GHz}$	pF	—	0.10 0.08	0.13 0.10
Series Resistance (R_S)	$I_F = 5 \text{ mA}$	Ω	—	—	7
Video Resistance (R_V)	$I_F = 40 \mu\text{A}$	Ω	—	1250	—
Tangential Signal Sensitivity (T_{SS})	NF -3 dB, 10 GHz	dBm	—	-57	—
Voltage Sensitivity (γ)	$P_{IN} = -30 \text{ dBm}$, Video BW = 500 KHz, 10 GHz	mV/mW	—	8000	—

Absolute Maximum Ratings

Parameter	Absolute Maximum
Input Power	20 dBm
Reverse Voltage	5 V
Forward Current	20 mA
Junction Temperature	+175°C
Storage Temperature	-65°C to +150°C
Solder Temperature	+260°C, peak for 5 sec, per JEDEC J-STD-20C

Handling Procedures

Please observe the following precautions to avoid damage:


Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these (HBM) Class 0 devices.


* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Typical Dynamic Transfer Characteristics: $R_L = 10\text{ m}\Omega$, $F_O = 10\text{ GHz}$


Output Voltage vs. Input Power

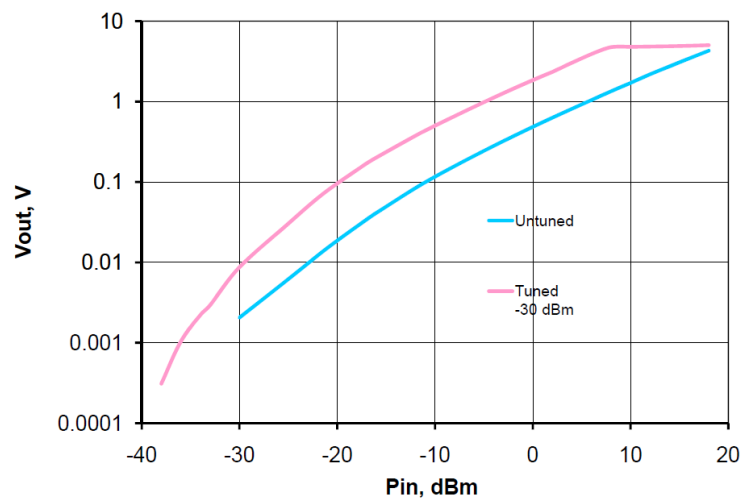

Lead-Free 0503 Plastic DFN Package

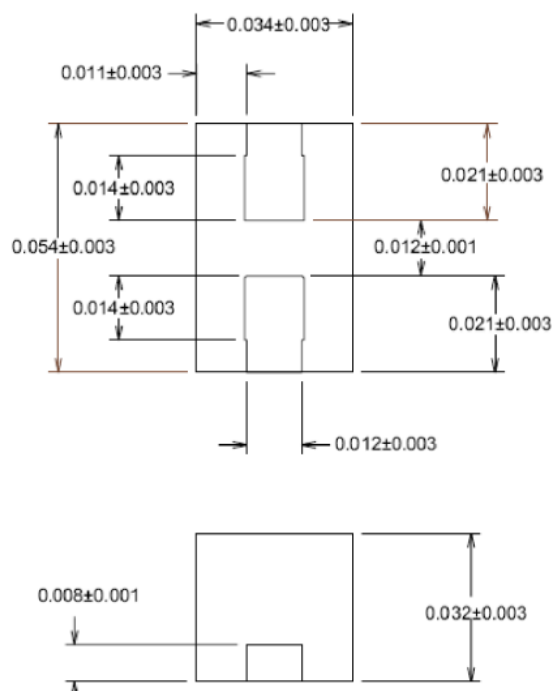

Soldering Footprint

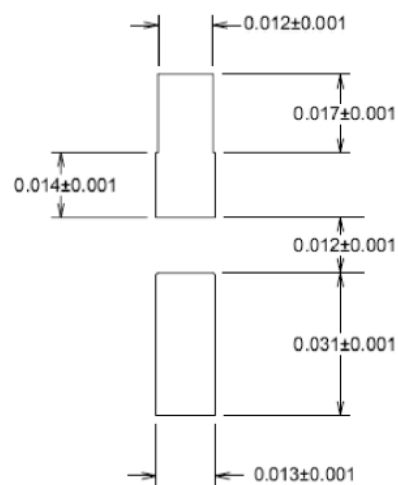

All Dimensions +/-0.001 Inch

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.