



Silicon carbide Power MOSFET 1200 V, 80 mΩ typ., 45 A in an HiP247 package



HiP247



Product status link

[SCT30N120](#)

Product summary

Order code	SCT30N120
Marking	SCT30N120
Package	HiP247
Packing	Tube

Features

- Very low $R_{DS(on)}$ over the entire temperature range
- Very high operating junction temperature capability ($T_J = 200\text{ °C}$)
- Very fast and robust intrinsic body diode
- Low capacitance

Applications

- AC-DC converters
- DC-DC converters
- Motor drives
- Solar inverters (string and central)
- Uninterruptable power supplies (UPS)

Description

This silicon carbide Power MOSFET is produced exploiting the advanced, innovative properties of wide bandgap materials. This results in unsurpassed on-resistance per unit area and very good switching performance almost independent of temperature. The outstanding thermal properties of the SiC material allow designers to use an industry-standard outline with significantly improved thermal capability. These features render the device perfectly suitable for high-efficiency and high power density applications.

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DS}	Drain-source voltage	1200	V
V_{GS}	Gate-source voltage	-10 to 25	V
I_D	Drain current (continuous, limited by silicon) at $T_C = 25\text{ °C}$	45	A
I_D	Drain current (continuous, limited by bonding wires) at $T_C = 25\text{ °C}$	40	A
I_D	Drain current (continuous) at $T_C = 100\text{ °C}$	34	A
$I_{DM}^{(1)}$	Drain current (pulsed)	90	A
P_{TOT}	Total power dissipation at $T_C = 25\text{ °C}$	270	W
T_{stg}	Storage temperature range	-55 to 200	°C
T_j	Operating junction temperature range		

1. Pulse width limited by safe operating area.

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance, junction-to-case	0.65	°C/W
R_{thJA}	Thermal resistance, junction-to-ambient	40	°C/W

2 Electrical characteristics

($T_C = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Table 3. On /off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{DSS}	Zero gate voltage drain current	$V_{GS} = 0\text{ V}$, $V_{DS} = 1200\text{ V}$		1	25	μA
		$V_{GS} = 0\text{ V}$, $V_{DS} = 1200\text{ V}$, $T_J = 200\text{ }^{\circ}\text{C}$		50		μA
I_{GSS}	Gate-body leakage current	$V_{DS} = 0\text{ V}$, $V_{GS} = -10\text{ to }22\text{ V}$			± 100	nA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}$, $I_D = 1\text{ mA}$	1.8	3.5		V
$R_{DS(on)}$	Static drain-source on- resistance	$V_{GS} = 20\text{ V}$, $I_D = 20\text{ A}$		80	100	m Ω
		$V_{GS} = 20\text{ V}$, $I_D = 20\text{ A}$, $T_J = 150\text{ }^{\circ}\text{C}$		90		m Ω
		$V_{GS} = 20\text{ V}$, $I_D = 20\text{ A}$, $T_J = 200\text{ }^{\circ}\text{C}$		100		m Ω

Table 4. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	$V_{GS} = 0\text{ V}$, $V_{DS} = 400\text{ V}$, $f = 1\text{ MHz}$	-	1700	-	pF
C_{oss}	Output capacitance		-	130	-	pF
C_{rss}	Reverse transfer capacitance		-	25	-	pF
R_G	Intrinsic gate resistance	$f = 1\text{ MHz}$, $I_D = 0\text{ A}$	-	5	-	Ω
Q_g	Total gate charge	$V_{DD} = 800\text{ V}$, $I_D = 20\text{ A}$ $V_{GS} = 0\text{ to }20\text{ V}$	-	105	-	nC
Q_{gs}	Gate-source charge		-	16	-	nC
Q_{gd}	Gate-drain charge		-	40	-	nC

Table 5. Switching energy (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max	Unit
E_{on}	Turn-on switching energy	$V_{DD} = 800\text{ V}$, $I_D = 20\text{ A}$, $R_G = 6.8\text{ }\Omega$, $V_{GS} = -2\text{ to }20\text{ V}$	-	500	-	μJ
E_{off}	Turn-off switching energy		-	350	-	μJ
E_{on}	Turn-on switching energy	$V_{DD} = 800\text{ V}$, $I_D = 20\text{ A}$, $R_G = 6.8\text{ }\Omega$, $V_{GS} = -2\text{ to }20\text{ V}$ $T_J = 150\text{ }^{\circ}\text{C}$	-	500	-	μJ
E_{off}	Turn-off switching energy		-	400	-	μJ

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max	Unit
$t_{d(on)V}$	Turn-on delay time	$V_{DD} = 800\text{ V}$, $I_D = 20\text{ A}$, $V_{GS} = 0\text{ to }20\text{ V}$	-	19	-	ns
$t_f(V)$	Fall time		-	28	-	ns
$t_{d(off)V}$	Turn-off delay time		-	45	-	ns
$t_r(V)$	Rise time		-	20	-	ns

Table 7. Reverse SiC diode characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max	Unit
V_{SD}	Diode forward voltage	$I_F = 10\text{ A}$, $V_{GS} = 0\text{ V}$	-	3.5	-	V
t_{rr}	Reverse recovery time	$I_{SD} = 20\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$ $V_{DD} = 800\text{ V}$	-	140	-	ns
Q_{rr}	Reverse recovery charge		-	140		nC
I_{RRM}	Reverse recovery current		-	2		A

2.1 Electrical characteristics (curves)

Figure 1. Safe operating area

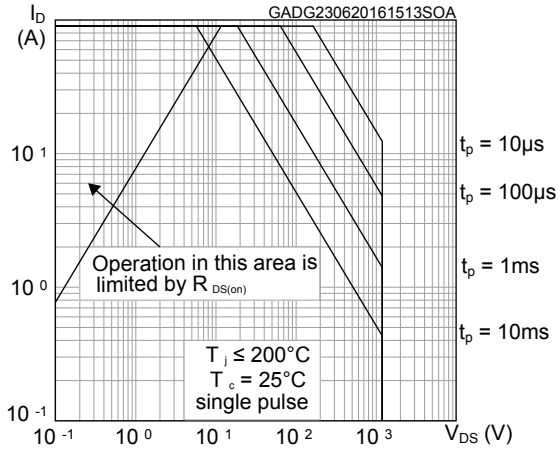


Figure 2. Normalized transient thermal impedance

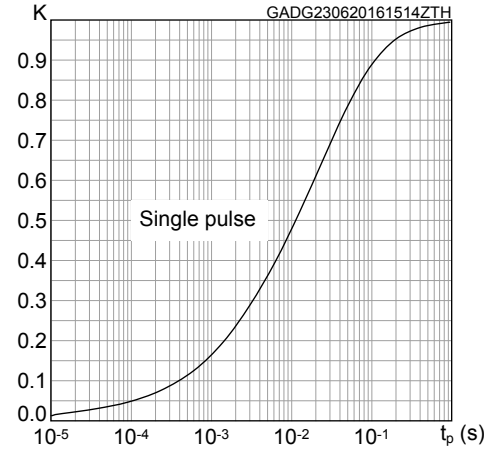


Figure 3. Output characteristics (Tj = 25 °C)

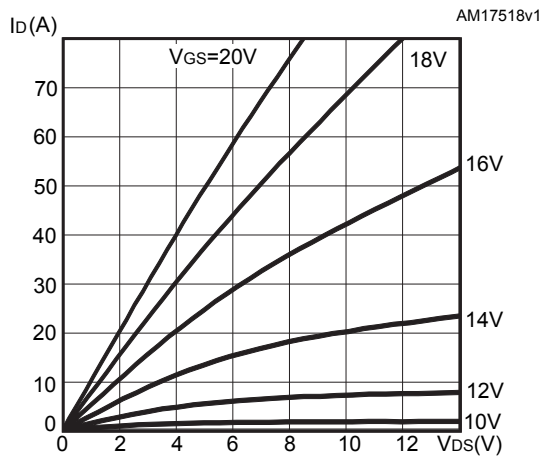


Figure 4. Output characteristics (Tj = 150 °C)

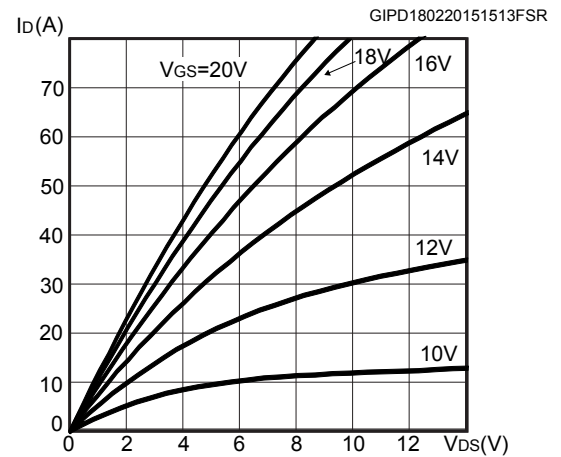


Figure 5. Output characteristics (Tj = 200 °C)

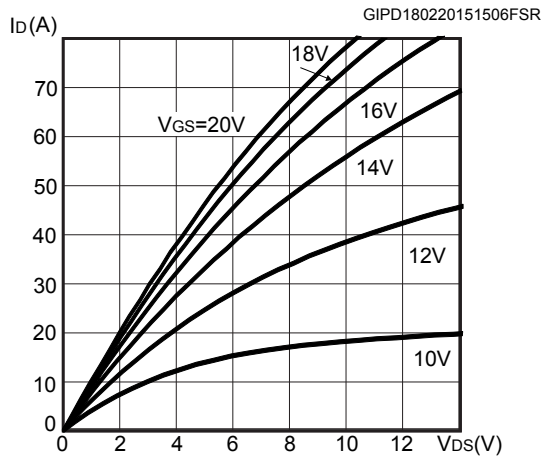


Figure 6. Transfer characteristics

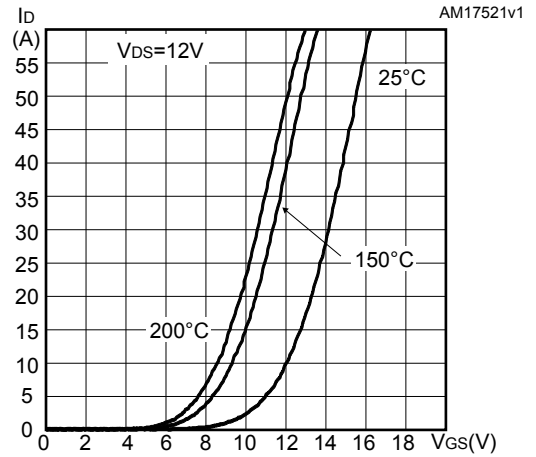


Figure 7. Total power dissipation

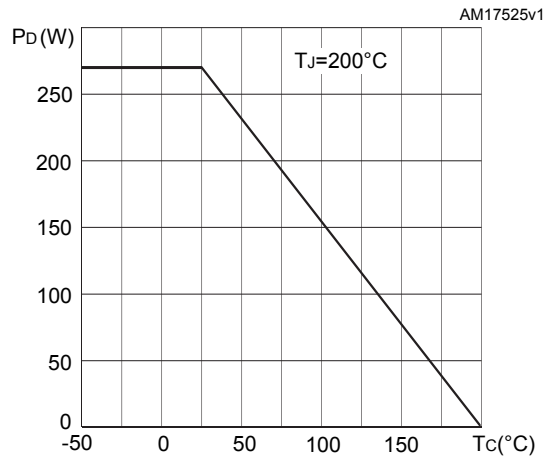


Figure 8. Maximum continuous drain current vs case temperature

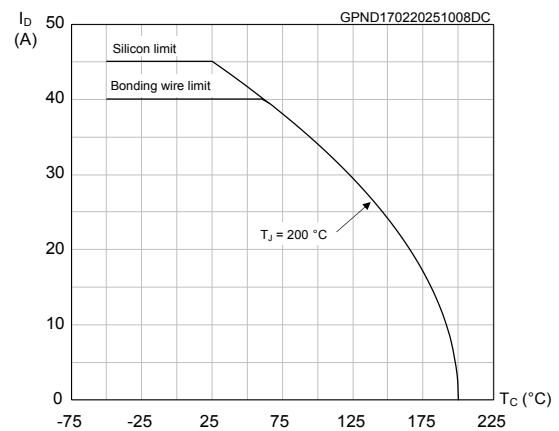


Figure 9. Gate charge vs gate-source voltage

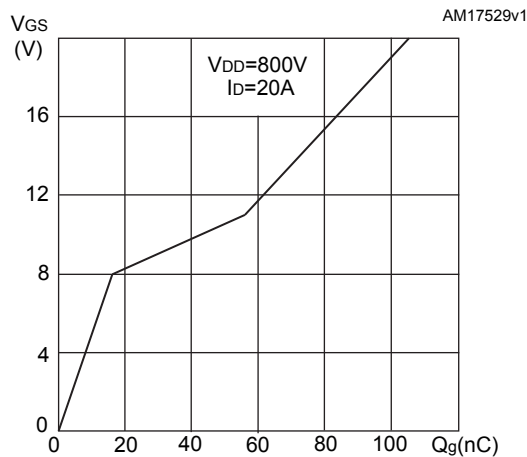


Figure 10. Capacitance variations

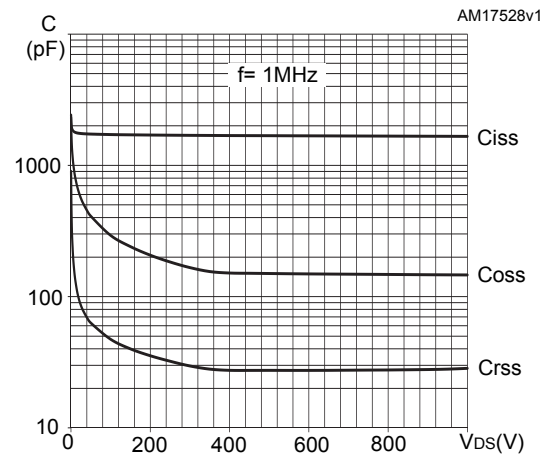


Figure 11. Switching energy vs. drain current

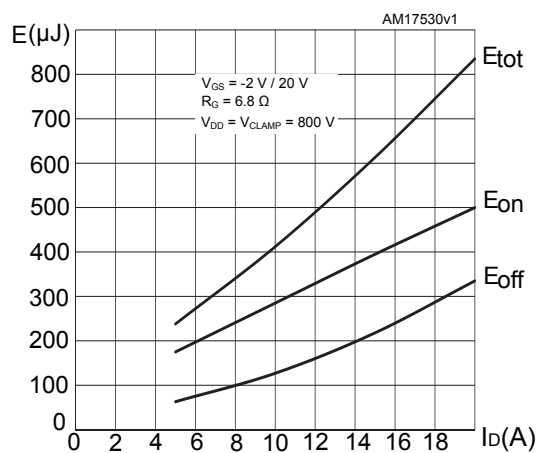


Figure 12. Switching energy vs. junction temperature

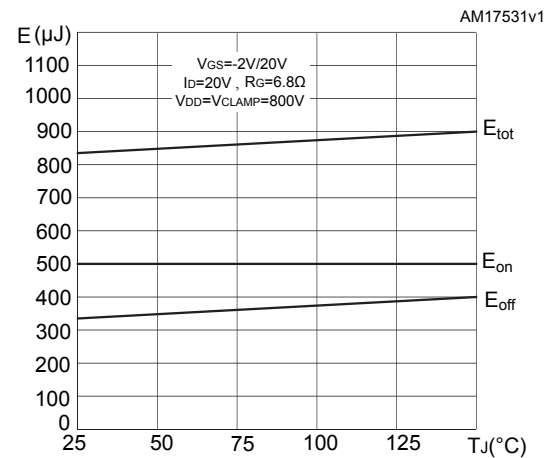


Figure 13. Normalized $V_{(BR)DSS}$ vs. temperature

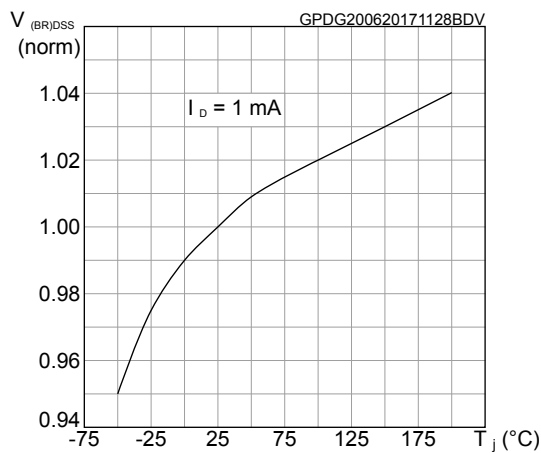


Figure 14. Normalized gate threshold voltage vs. temperature

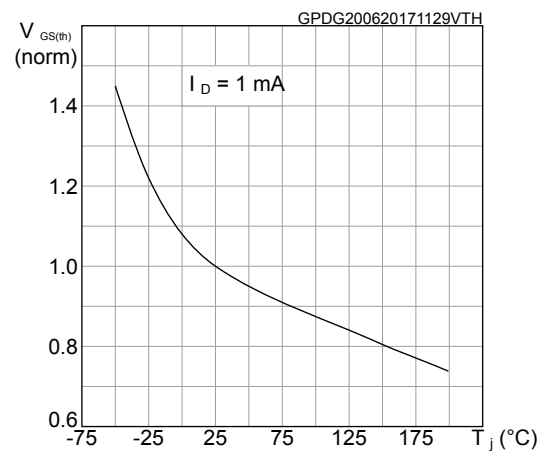


Figure 15. Normalized on-resistance vs. temperature

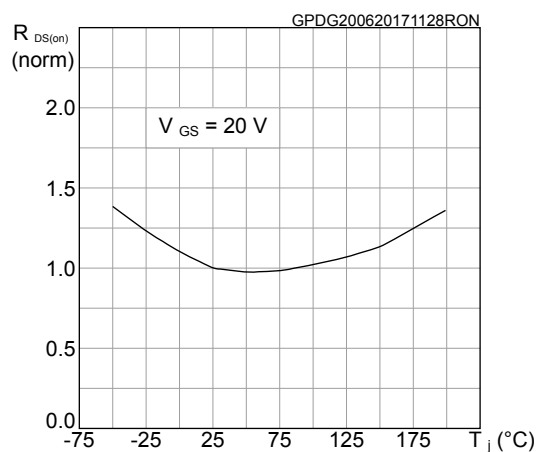


Figure 16. Body diode characteristics ($T_J = -50\text{ °C}$)

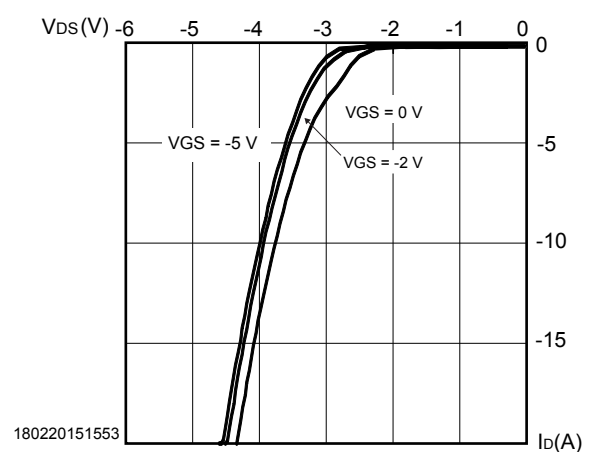


Figure 17. Body diode characteristics ($T_J = 25\text{ °C}$)

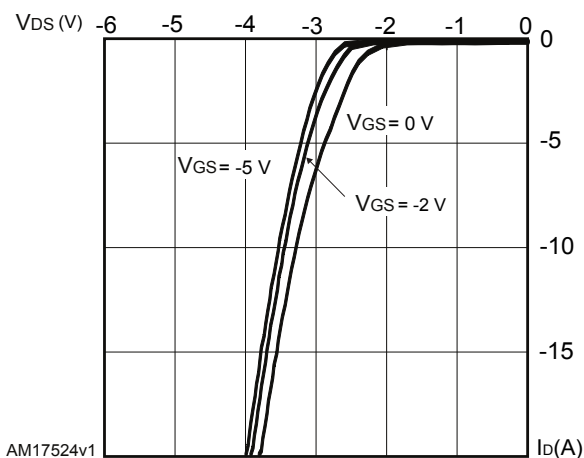


Figure 18. Body diode characteristics ($T_J = 150\text{ °C}$)

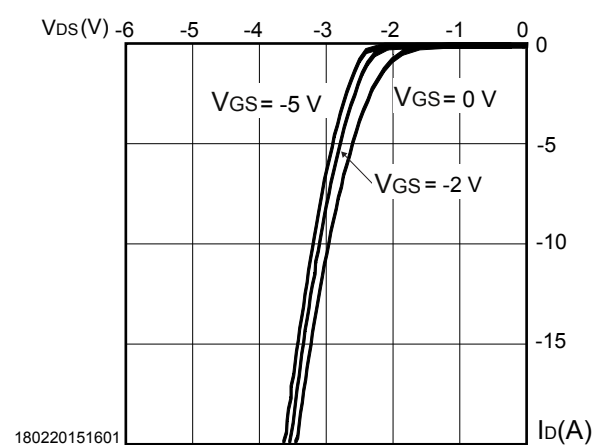


Figure 19. 3rd quadrant characteristics ($T_J = -50\text{ }^{\circ}\text{C}$)

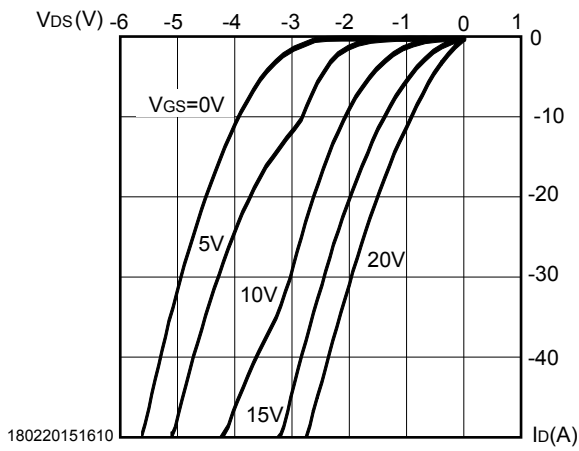


Figure 20. 3rd quadrant characteristics ($T_J = 25\text{ }^{\circ}\text{C}$)


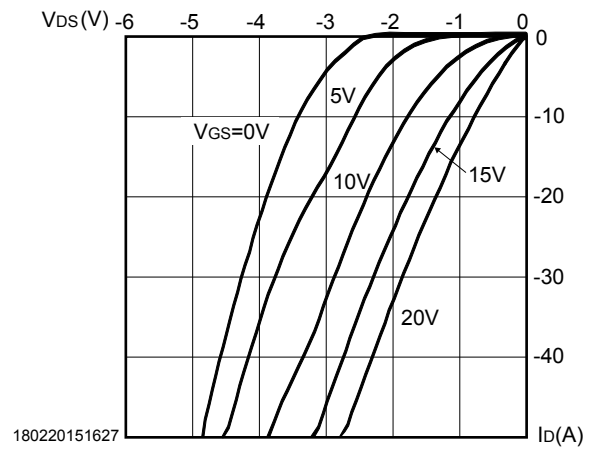


Figure 21. 3rd quadrant characteristics ($T_J = 150\text{ }^{\circ}\text{C}$)

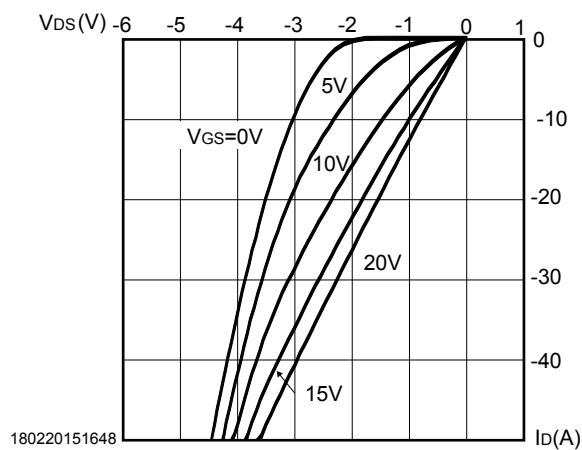


3 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

3.1 HiP247 package information

Figure 22. HiP247 package outline

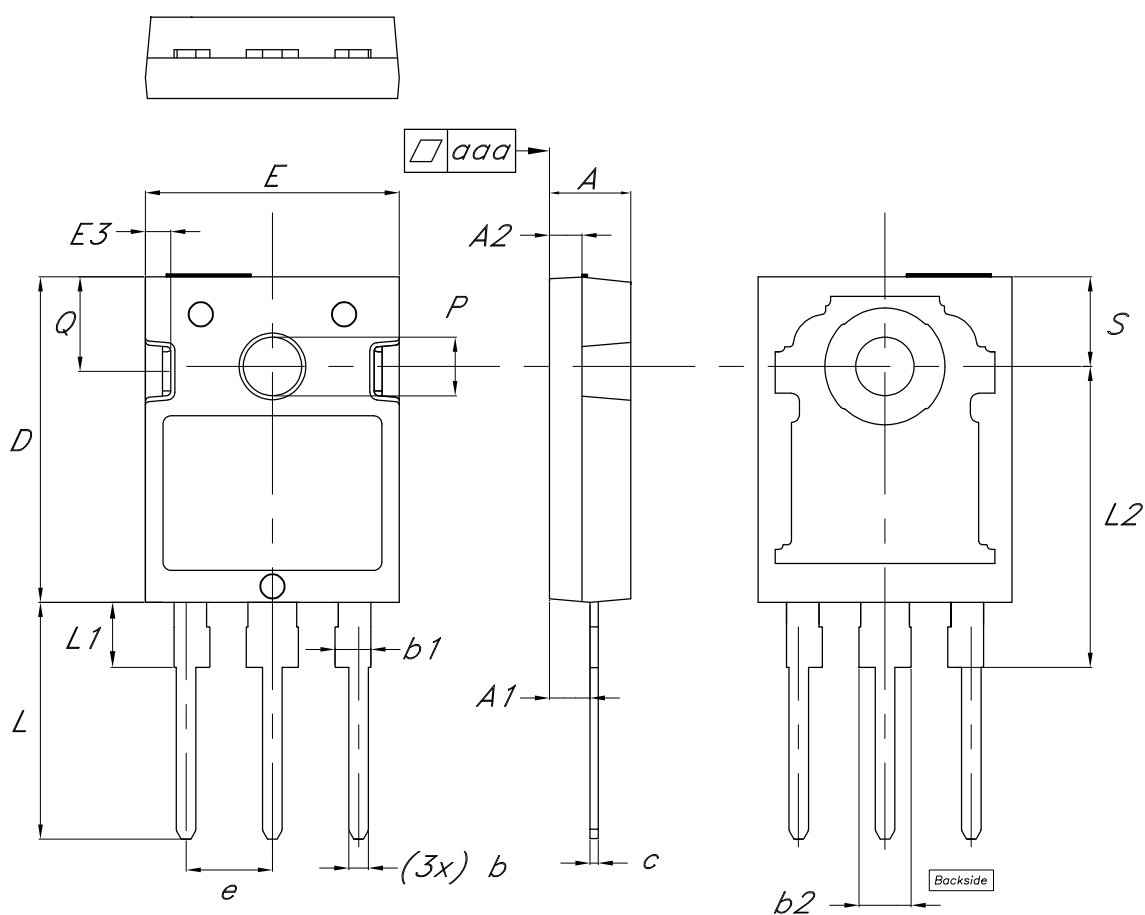

8581091_4

Table 8. HiP247 package mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.85	5.00	5.15
A1	2.20		2.60
A2	1.90	2.00	2.10
b	1.00		1.40
b1	2.00		2.40
b2	3.00		3.40
c	0.40		0.80
D	19.85	20.00	20.15
E	15.45	15.60	15.75
E3	1.45		1.65
e	5.30	5.45	5.60
L	14.20		14.80
L1	3.70		4.30
L2	18.30	18.50	18.70
P	3.55		3.65
Q	5.65		5.95
S	5.30	5.50	5.70
aaa		0.04	0.10

Revision history

Table 9. Document revision history

Date	Revision	Changes
10-May-2012	1	First release
21-May-2013	2	Updated trr value in <i>Table 8</i> . Updated dynamic parameters in <i>Table 5</i> , VGS(th) in <i>Table 4</i> and Eon in <i>Table 6</i> .
24-Jun-2013	3	Document status promoted from target to preliminary data. Added: <i>Section 2.1: Electrical characteristics (curves)</i>
11-Jul-2013	4	Updated <i>Figure 6: Output characteristics (TJ = 200 °C)</i> and <i>Figure 7: Transfer characteristics</i> .
18-Dec-2013	5	Updated parameters in <i>Table 2: Absolute maximum ratings</i> and <i>Table 4: On/off states</i> .
27-May-2014	6	Added <i>Table 7: Switching times</i> . Updated <i>Section 3: Package mechanical data</i> . Minor text changes.
25-Sep-2014	7	Document status promoted from preliminary to production data.
17-Feb-2015	8	Updated title in cover page.
20-Feb-2015	9	Updated <i>Section 2.1: Electrical characteristics (curves)</i> .
24-Jul-2016	10	Updated title and features in cover page. Updated <i>Figure 2: "Safe operating area"</i> and <i>Figure 3: "Thermal impedance"</i> . Minor text changes.
11-May-2017	11	Updated <i>Table 4: "On/off states"</i> and <i>Section 2.1: "Electrical characteristics (curves)"</i> . Minor text changes.
17-Mar-2025	12	Updated Section 3.1: HiP247 package information . Minor text changes.

Contents

1	Electrical ratings	2
2	Electrical characteristics.....	3
2.1	Electrical characteristics (curves)	5
3	Package information.....	9
3.1	HiP247 package information	9
	Revision history	11

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved