

Surface-mount Power Transistor SSD103

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)


Symbol	Ratings	Unit
V_{CEO}	65 ± 5	V
V_{EBO}	6	V
I_c	6	
I_c (pulse)	10 ($P_w \leq 1\text{mS}$, Duty $\leq 25\%$)	A
I_B	10	A
P_c	1.5^*1	W
T_j	150	$^\circ\text{C}$
T_{stg}	-55 to +150	$^\circ\text{C}$

*1: FR4 70mm \times 100mm \times 1.6mm
(drain heatsink copper foil area 25 \times 25mm)


Electrical Characteristics

Symbol	Test Conditions	Ratings			Unit
		min	typ	max	
I_{CBO}	$V_{\text{CB}} = 60\text{V}$, $I_E = 0\text{A}$			10	μA
I_{EBO}	$V_{\text{EB}} = 6\text{V}$, $I_c = 0\text{A}$			10	μA
V_{CEO}	$I_c = 50\text{mA}$	60	65	70	V
h_{FE}	$V_{\text{CE}} = 1\text{V}$, $I_c = 1\text{A}$	400	800	1500	
$V_{\text{CE(sat)}}$	$I_c = 1.5\text{A}$, $I_B = 15\text{mA}$		0.11	0.15	V
V_{FEC}	$I_{\text{FEC}} = 6\text{A}$		1.25	1.5	V
$E_{\text{s/b}}$	$L = 10\text{mH}$	80			mJ


External Dimensions SOP8

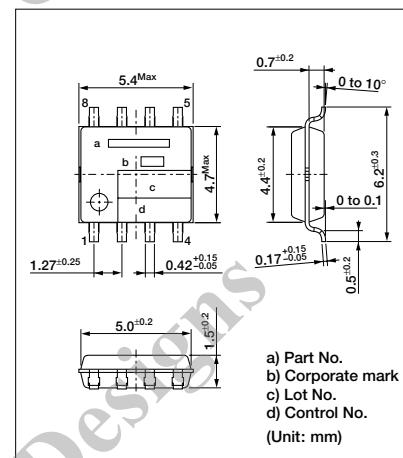


$I_c - V_{\text{CE}}$ Characteristics (typ.)

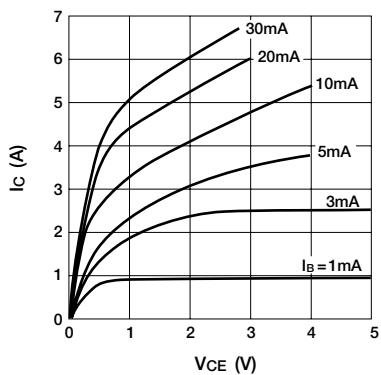


$V_{\text{CE(sat)}} - I_c$ Temperature Characteristics (typ.)

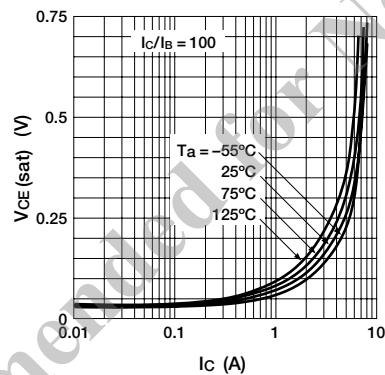


$I_c - V_{\text{BE}}$ Temperature Characteristics (typ.)

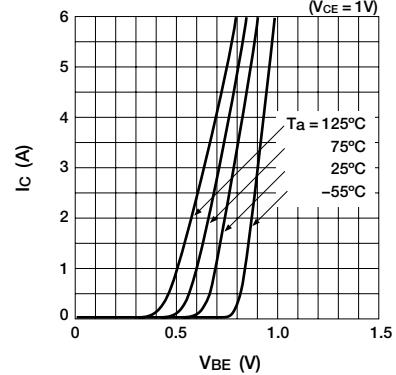


$h_{\text{FE}} - I_c$ Temperature Characteristics (typ.) ($V_{\text{CE}} = 1\text{V}$)

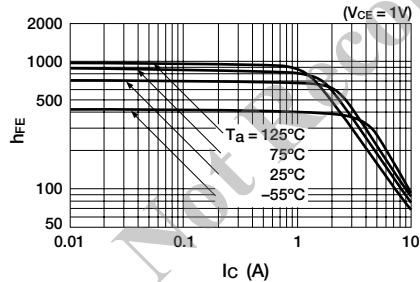

$t_{\text{on}} \cdot t_{\text{sig}} \cdot t_{\text{f}} - I_c$ Characteristics (typ.)

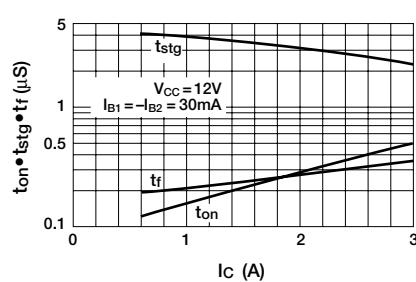

Safe Operating Area (Single pulse)

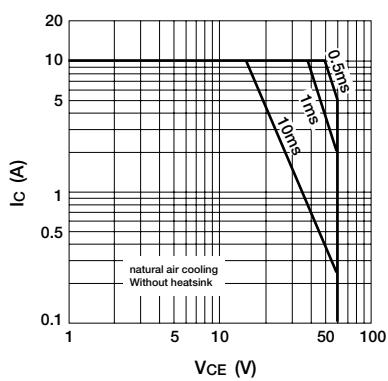

Equivalent Circuit Diagram

