


## FEATURES

- Holds 2 or 4 LGX Style Adapter Plates or Cassette Modules (not included)
- Splicing and Patching Capability
- Dual Hinged Doors with Snap Latch-Security
- Cable Management Rings Included
- Multiple Cable Routing Options Possible
- Raised Splice Tray Stand holds 2 Trays (splice trays not Included)
- Pad Lock Eyelets for Both Doors
- Top and Bottom Cable Entry Ports
- Can be ordered with terminated Cables, Adapters, Pigtails or Cassettes
- Rugged 14 Gauge Aluminum, Available in Black or Off-White (BW)

## TECH DRAWING

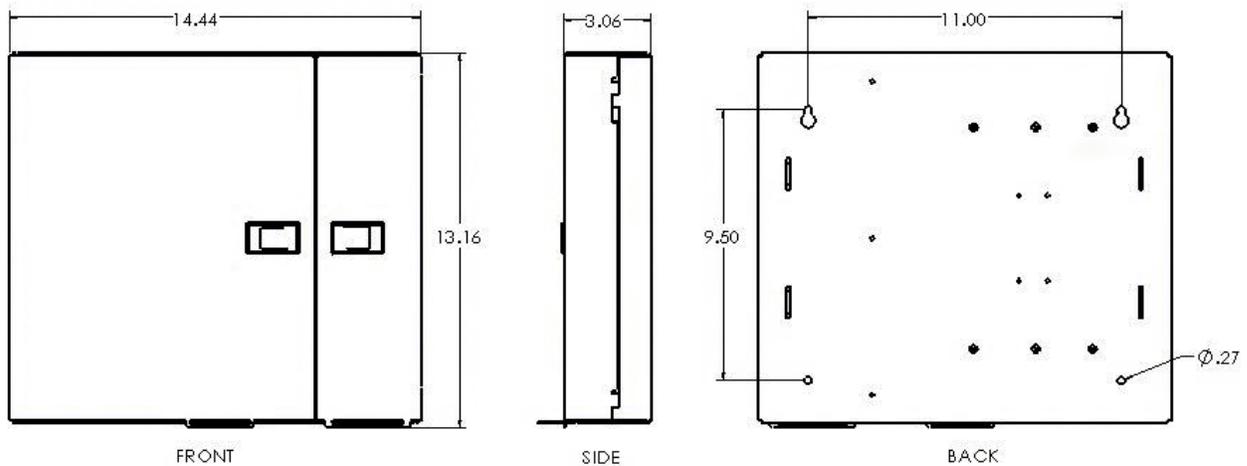

## SPECIFICATIONS

<b>Dimension</b>	14.44" W x 13.16" H x 3.06" D
<b>Capacity</b>	2 Panel: Up to 24 Single Fiber Connections or 48 Duplex (LC) 4 Panel: Up to 48 Single Fiber Connections or 96 Duplex (LC)
<b>Material</b>	.060" Aluminum
<b>Coating</b>	Electro Statically Applied Powder Coat; Available in Black or Off-White

## ORDERING INFORMATION

<b>F1-DW2X</b>	2-Panel w/Black Powder Coat
<b>F1-DW2XBW</b>	2-Panel w/Off White Powder Coat
<b>F1-DW4</b>	4-Panel w/Black Powder Coat
<b>F1-DW4XBW</b>	4-Panel w/Off White Powder Coat

## RECOMMENDED SPLICE TRAYS

<b>F1-SPL12</b>	Metal Splice Tray, 12 Position Fusion Splice Chip, 6.5" L x 4.7" W x .42" H
<b>F1SPL24-8.5</b>	Metal Splice Tray, 24 Position Fusion Splice Chip, 8.5" L x 5" W x .42" H
<b>F1-6808</b>	Plastic Splice Tray, 12 Position Fusion Splice Chip, 7.1" L x 4.25" W x .48" H