

## HINGE-COVER WIFI, TYPE 4X



### INDUSTRY STANDARDS

UL 508A Listed; Type 4, 4X, 12, 13; File No. E61997  
cUL Listed per CSA C22.2 No 94; Type 4, 4X, 12, 13; File No. E61997  
Enclosure flammability rating per UL 508

NEMA/EEMAC Type 4, 4X, 12, and 13  
Window flammability rating per UL 508  
IEC 60529, IP66  
Cabinets with solid doors are plenum rated.

### APPLICATION

The fiberglass WiFi Cabinet is a secure, hinged enclosure that does not impede WiFi or WLAN signals. It is ideal for housing wireless equipment in locations such as building plenum space, tunnels, floor vaults, marinas, outside walls or rooftops.

### FEATURES

- Fiberglass is easily punched, drilled, filed or sawed
- Gasket assures watertight and dust-tight seal
- Molded-in-place threaded brass inserts and plated steel screws are provided for mounting optional panels and terminal block kits
- Removable hinged cover attached to body with Type 316 stainless steel hinge pin
- Screw cover enclosures are secured with two captivated Type 316 stainless steel slotted cross-point cover screws
- Available quick-release latches are corrosion-resistant polyester located in corners to provide unobstructed access to enclosure
- Knockout padlock provisions included in each latch
- Material is halogen free

### SPECIFICATIONS

- Enclosure and door made of molded fiberglass polyester that resists chemicals and temperature change
- Scratch-resistant polycarbonate windows are permanently bonded in place
- Polyester mounting brackets and stainless steel attachment screws are provided with each enclosure
- Hinge pin and bail are corrosion-resistant Type 316 stainless steel
- Includes a 3/4-in. plywood panel for mounting equipment

### FINISH

Fiberglass material is light gray inside and out.

### ACCESSORIES

Quick-Release Latch Kit  
Swing-Out Panel Kit  
Threaded Panel Extenders  
Panels for WiFi Cabinets and Small Wall-Mount Enclosures

### BULLETIN: DWS12


#### Standard Product **Solid Door**

Catalog Number	AxBxC in./mm	Panel	Panel D X E in./mm	Mounting G x H in./mm	Overall Size L x W in./mm	J in./mm	K in./mm	O in./mm	P in./mm	Q in./mm	R in./mm	T in./mm	U in./mm
D664CHSCFGP	6.00 x 6.00 x 4.00 152 x 152 x 102	A6P6WD	4.88 x 4.88 124 x 124	6.94 x 4.00 176 x 102	6.50 x 6.50 165 x 165	3.25 83	1.00 25	4.25 108	4.25 108	5.64 143	5.12 130	.12 3	5.64 143
D16148CHSCFGP	16.00 x 14.00 x 8.00 406 x 356 x 203	A16P14WD	14.75 x 12.88 375 x 327	16.94 x 12.00 430 x 305	16.55 x 14.55 420 x 370	6.23 158	2.08 53	12.25 311	14.25 362	15.56 395	15.12 384	.15 4	13.56 344
D181610CHSCFGP	18.00 x 16.00 x 10.00 457 x 406 x 254	A18P16WD	16.75 x 14.88 425 x 378	18.94 x 14.00 481 x 356	18.58 x 16.58 472 x 421	7.66 195	2.66 68	14.25 362	16.25 413	17.53 445	17.12 435	.16 4	15.53 394

Wood panels included with enclosure. Optional steel panels must be ordered separately.

#### Standard Product **Window Door**

Catalog Number	AxBxC in./mm	Panel	Panel D X E in./mm	Mounting G x H in./mm	Overall Size L x W in./mm	J in./mm	K in./mm	O in./mm	P in./mm	Q in./mm	R in./mm	T in./mm	U in./mm
D664CHSCFGWP	6.00 x 6.00 x 4.00 152 x 152 x 102	A6P6WD	4.88 x 4.88 124 x 124	6.94 x 4.00 176 x 102	6.50 x 6.50 165 x 165	3.25 83	1.00 25	4.25 108	4.25 108	5.64 143	5.12 130	.12 3	5.64 143
D16148CHSCFGWP	16.00 x 14.00 x 8.00 406 x 356 x 203	A16P14WD	14.75 x 12.88 375 x 327	16.94 x 12.00 430 x 305	16.55 x 14.55 420 x 370	6.23 158	2.08 53	12.25 311	14.25 362	15.56 395	15.12 384	.15 4	13.56 344
D181610CHSCFGWP	18.00 x 16.00 x 10.00 457 x 406 x 254	A18P16WD	16.75 x 14.88 425 x 378	18.94 x 14.00 481 x 356	18.58 x 16.58 472 x 421	7.66 195	2.66 68	14.25 362	16.25 413	17.53 445	17.12 435	.16 4	15.53 394

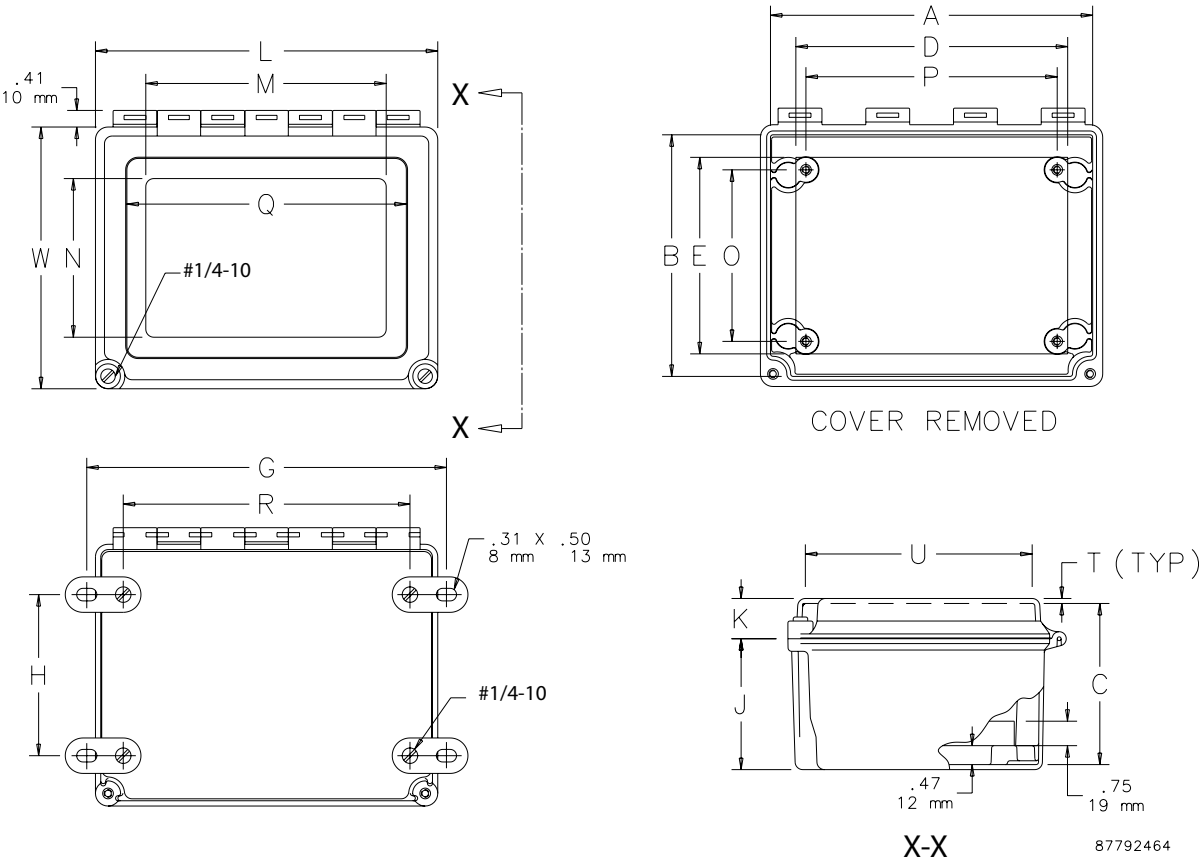

## THREADED PANEL EXTENDERS



Threaded Panel Extenders are made of plated steel and designed to raise the panel mounting surface. Extenders attach to threaded internal pads. Male and female thread size is 10-32. Each kit contains 4 extenders.

**BULLETIN: A80**

Catalog Number	Length (in.)	Length (mm)
APE050	0.50	13
APE100	1.00	25

## QUICK-RELEASE LATCH KIT



Two fiberglass-reinforced gray polyester latches with 316L stainless steel bail and screw-hole plugs are included in each package. Supplied with Continuous Hinge, Type 4X enclosures and available for Fiberglass Hinged Cover WiFi Cabinet, Type 4X. Kit converts screw-cover enclosures to quick-release without modification. No tools needed to install. Padlocking provision is included.

**BULLETIN: A48Y**

Catalog Number	Description	Kit Qty.
AL48	Quick-Release Latch Kit	2

## SWING-OUT PANEL KIT



The Swing-Out Panel Kit provides an attractive, cost-effective solution for installing front-mounted panels in Continuous Hinge, Type 4X, and Overlapping Cover, Type 4X enclosures. No drilling required.

**BULLETIN: A48Y**



Catalog Number	Fits Enclosure A x B (in.)	Fits Enclosure A x B (mm)
A6SPK6C	6.00 x 6.00	152 x 152
A8SPK6C	8.00 x 6.00	203 x 152
A10SPK8C	10.00 x 8.00	254 x 203
A12SPK10C	12.00 x 10.00	305 x 254
A16SPK14C	16.00 x 14.00	406 x 356
A18SPK16C	18.00 x 16.00	457 x 406
A14SPK12C	14.00 x 12.00	356 x 305

PANELS FOR WIFI CABINETS AND SMALL WALL-MOUNT ENCLOSURES

Panels are constructed of unfinished 3/4-in. plywood. They are supplied with Fiberglass Hinged-Cover and PolyPro Type 4X WiFi Cabinets.

BULLETIN: DWS12

Catalog Number	Panel Size D x E (in.)	Panel Size D x E (mm)	V (in.)	V (mm)
A6P6WD	4.88 x 4.88	124 x 124	.31	8
A16P14WD	14.75 x 12.88	375 x 327	.25	6
A18P16WD	16.75 x 14.88	428 x 378	.25	6

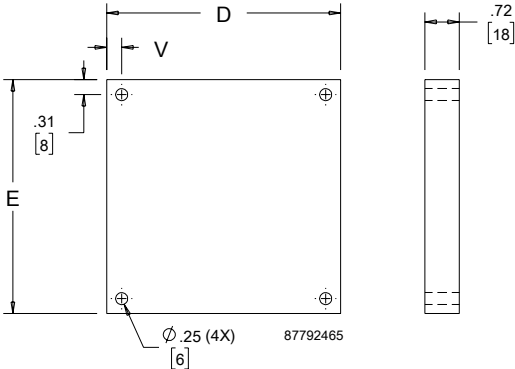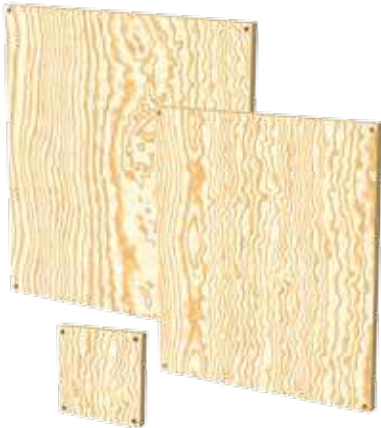

FIBERGLASS ENCLOSURE MOUNTING FOOT



One-piece mounting foot kit consists of the necessary hardware to attach two fiberglass feet, molded from the same material as our A48 enclosure. This compression-molded fiberglass material has excellent chemical and temperature resistance and provides outstanding performance and durability in harsh environments. The mounting feet can be field installed on either the 18x16 or the 20x16 enclosure.

BULLETIN: A48Y

Catalog Number	Description	Kit Qty.
A48MFTHDWK	Mounting Foot Kit	4