



参数Datasheet		
间距 Minimum Center	1.27mm[0.050inch]	
全行程 Full Stroke	6.35mm[0.25inch]	
有效行程 Recommended Stroke	4.20mm[0.167inch]	
弹力 Spring force	100G[3.527oz]	
寿命 life cycle	200k	
电阻 Impedance	50-100mΩ	
电流 Current	3A	
温度 Temperature	-55℃~120℃	
钻孔 Drilling	in CEM 1: 0.960 - 0.980 mm (.0378-.0386) in FR 4: 0.970 - 0.990 mm (.0382-.0390)	


材质Materials	
针头 Plunger	SK4、BeCu-Au plated
弹簧 Spring	Music wire-Au plated or SUS
内管 Barrel	Phosphor Copper or Copper nickel-Au plated

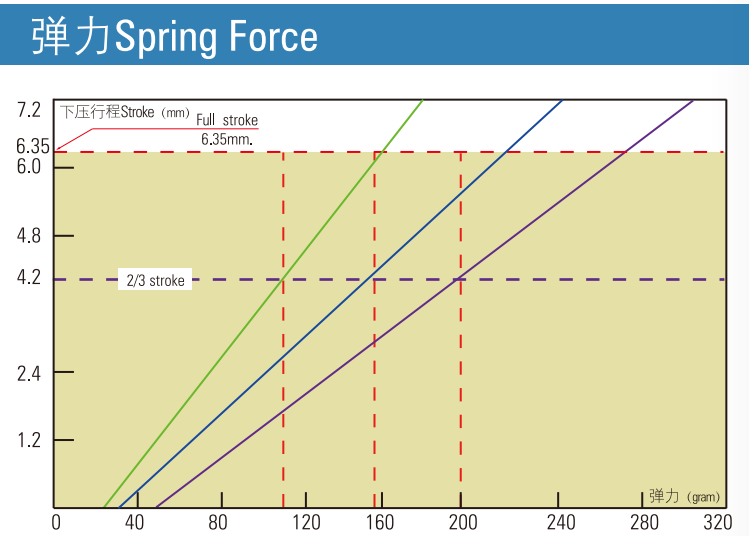

套管Receptacle

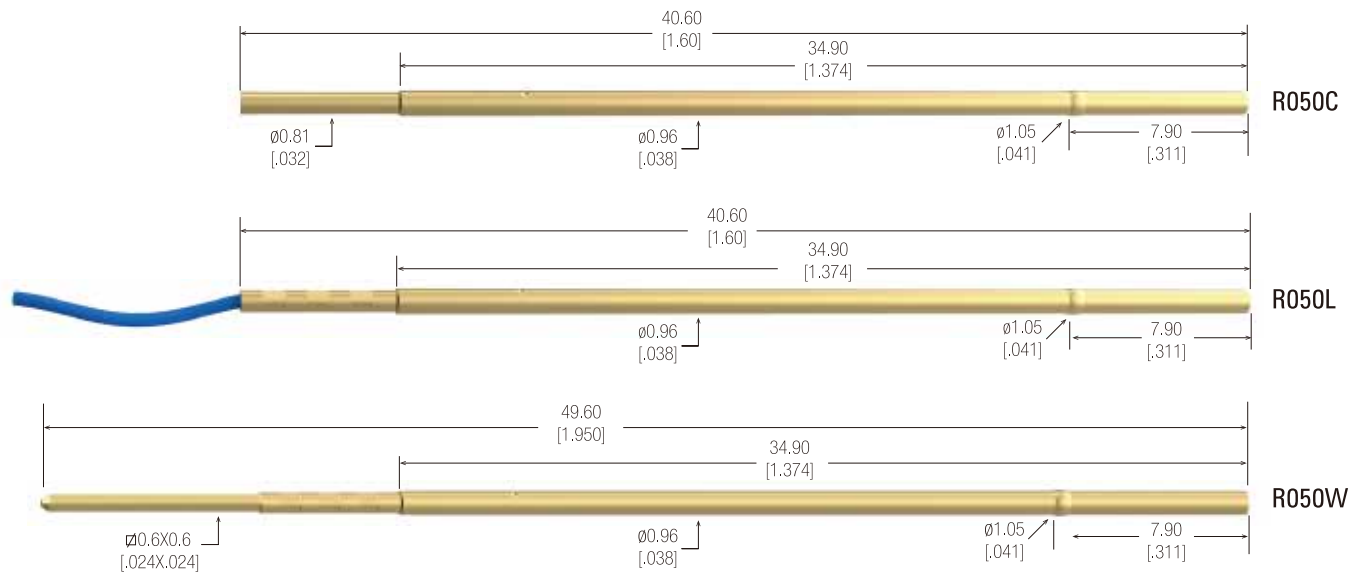


头型Tip Style

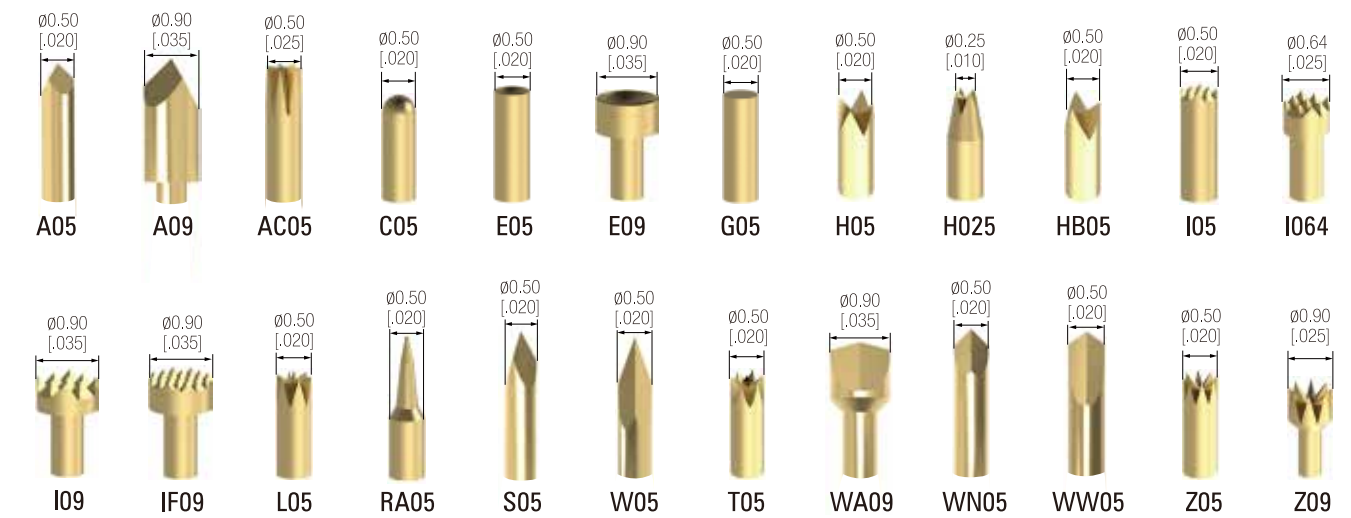


如何选型How to order

TOP	050	A	05	200G
系列名称 Series Name TOP=Normal ICT Probe	测试间距 Test Pitch Number 050=50mil test pitch	头型 Tip Style Code A=28° tip angle C=Round more...	直径 Tip Diameter 05=0.5mm=0.020inch	弹力 Spring Force 100G=100grams=1Newton 150G=150grams=1.5Newton 200G=200grams=2Newton

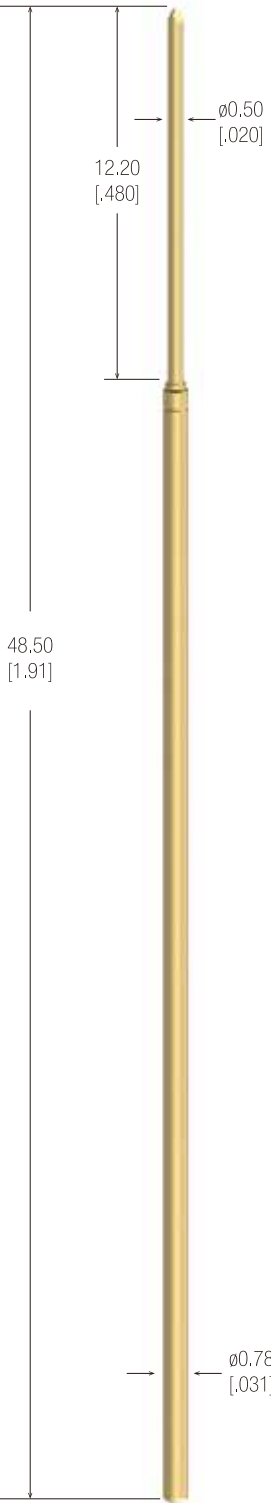


参数Datasheet		
间距 Minimum Center	1.27mm[0.050inch]	
全行程 Full Stroke	10.00mm[0.394inch]	
有效行程 Recommended Stroke	8.00mm[0.315inch]	
弹力 Spring force	100G[3.527oz]	
寿命 life cycle	50k	
电阻 Impedance	50-100mΩ	
电流 Current	3A	
温度 Temperature	-55℃~120℃	
钻孔 Drilling	in CEM 1: 0.960 - 0.980 mm (.0378-.0386) in FR 4: 0.970 - 0.990 mm (.0382-.0390)	


材质Materials		
针头 Plunger	SK4、BeCu-Au plated	
弹簧 Spring	Music wire-Au plated or SUS	
内管 Barrel	Phosphor Copper or Copper nickel-Au plated	

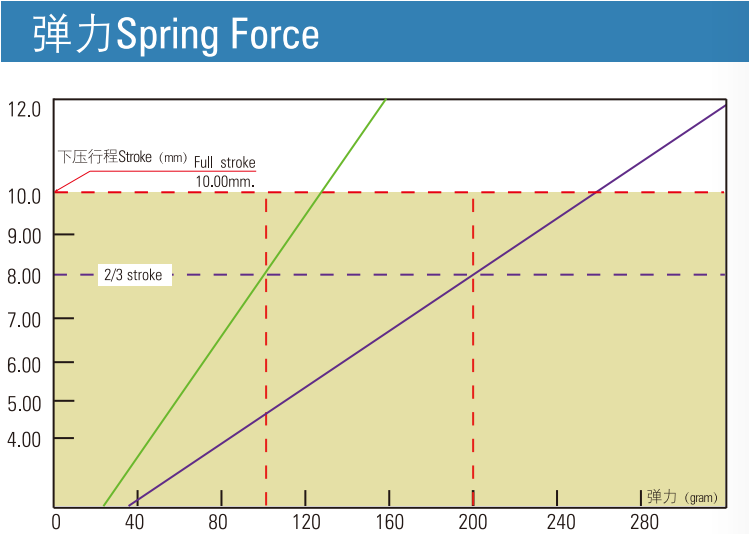

套管Receptacle

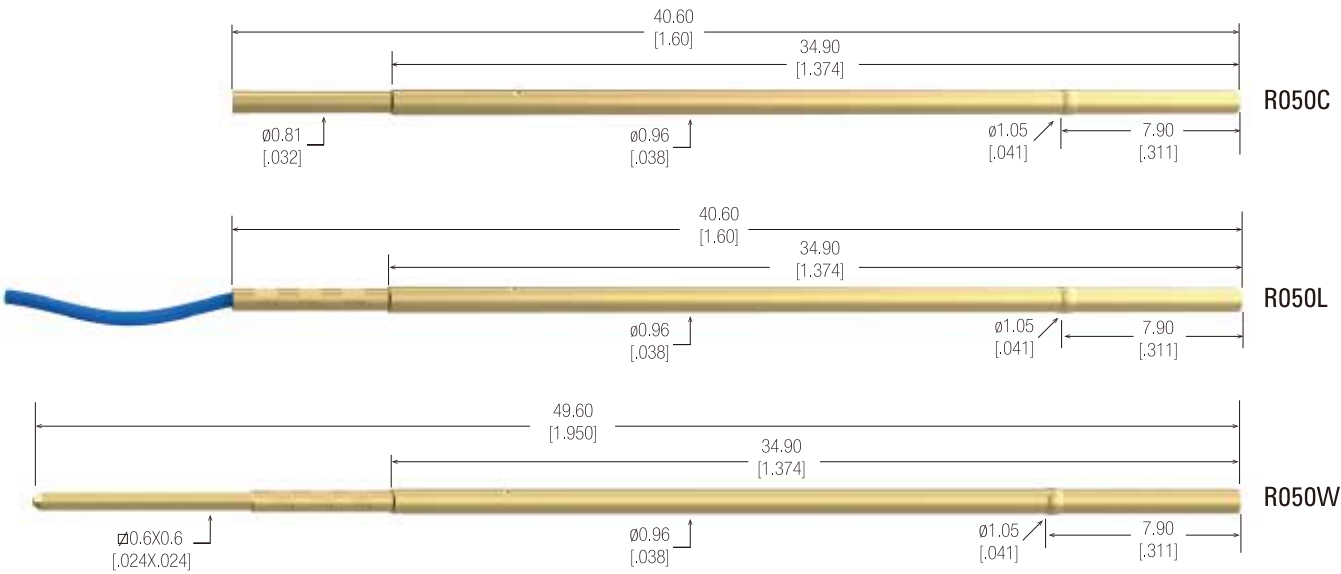


头型Tip Style

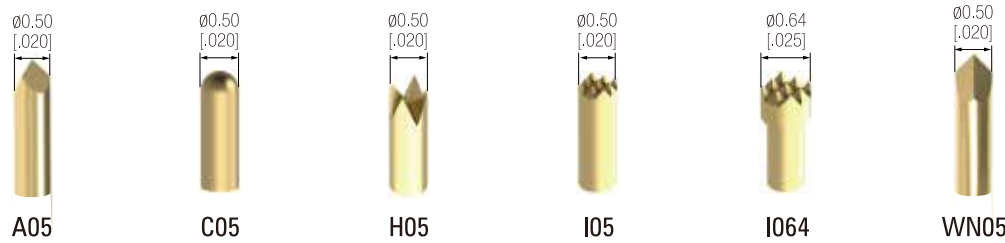


如何选型How to order

TOP	050	I	05	200G	L
系列名称 Series Name	测试间距 Test Pitch Number	头型 Tip Style Code	直径 Tip Diameter	弹力 Spring Force	长度 Long Version
TOP=Normal ICT Probe	050=50mil test pitch	I=9 points crown C=Round more...	05=0.5mm=0.020inch	100G = 100grams = 1Newton 200G = 200grams = 2Newton more...	L=48.50mm

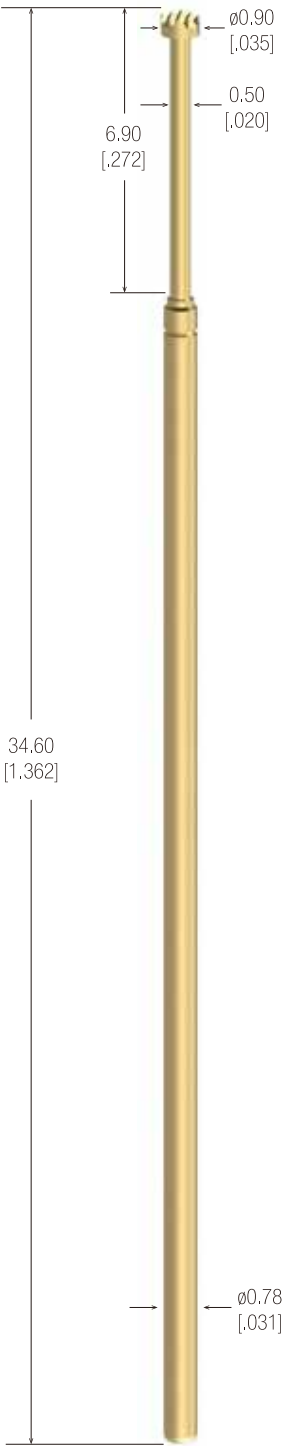


参数Datasheet	
间距 Minimum Center	1.27mm[0.050inch]
全行程 Full Stroke	6.35mm[0.25inch]
有效行程 Recommended Stroke	4.20mm[0.167inch]
弹力 Spring force	100G[3.527oz]
寿命 life cycle	200k
电阻 Impedance	50-100mΩ
电流 Current	3A
温度 Temperature	-55℃~120℃
钻孔 Drilling	in CEM 1: $\varnothing 0.960 - 0.980$ mm (.0378-.0386) in FR 4: $\varnothing 0.970 - 0.990$ mm (.0382-.0390)


材质Materials	
针头 Plunger	SK4、BeCu-Au plated
弹簧 Spring	Music wire-Au plated or SUS
内管 Barrel	Phosphor Copper or Copper nickel-Au plated

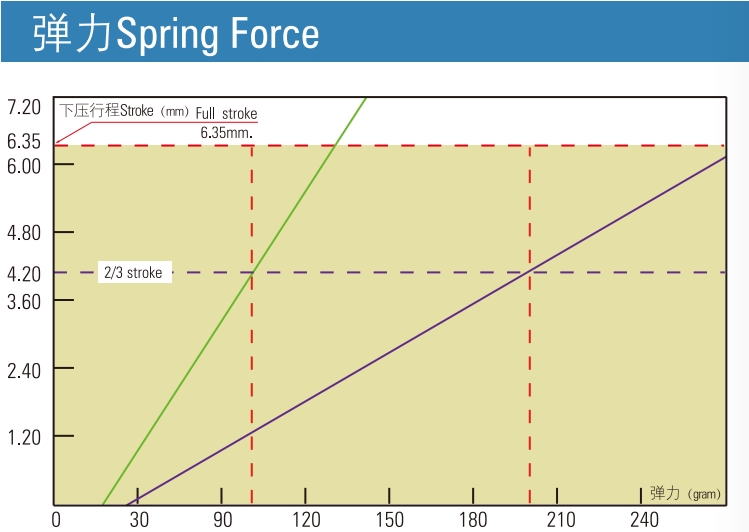

套管Receptacle

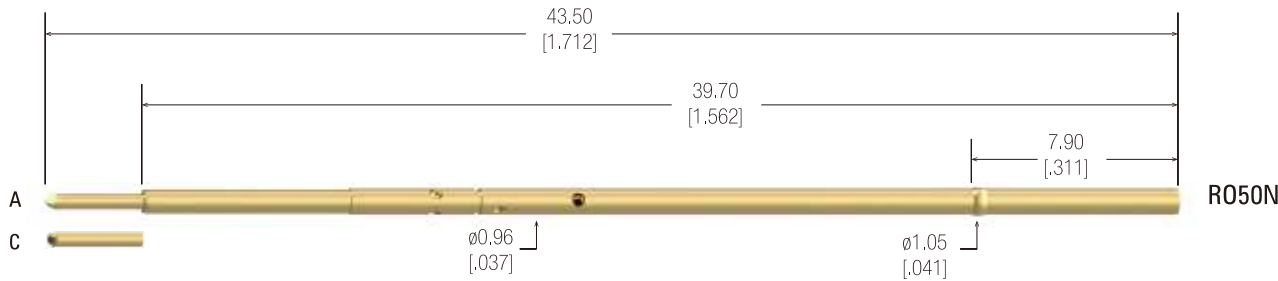

头型Tip Style

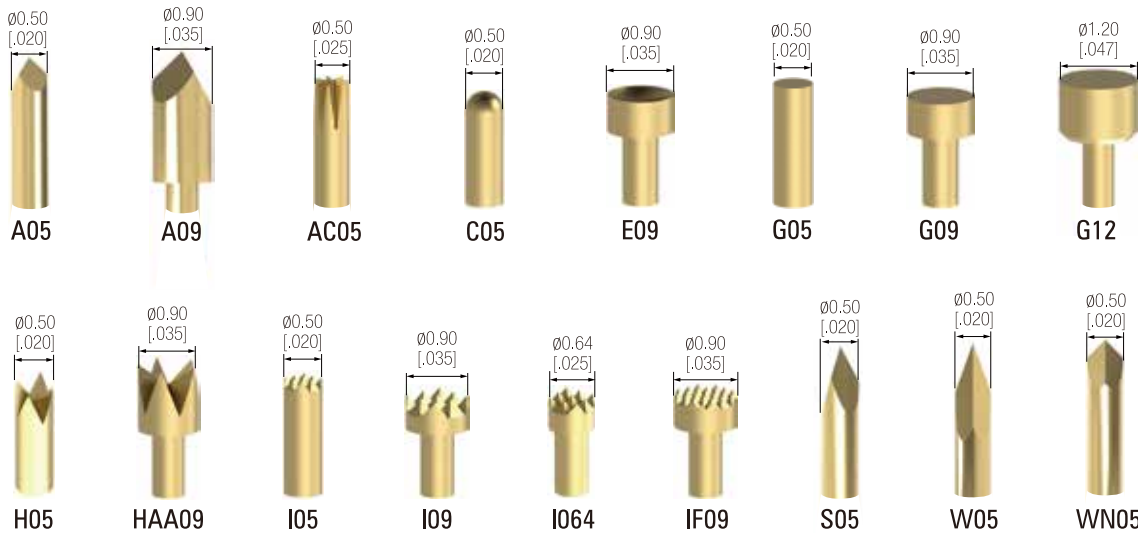

如何选型How to order

TOP	050	C	05	200G	S1
系列名称 Series Name TOP=Normal ICT Probe	测试间距 Test Pitch Number 050=50mil test pitch	头型 Tip Style Code C=Round	直径 Tip Diameter 05=0.50mm=0.020inch	弹力 Spring Force 100G =100grams=1Newton 200G =200grams=2Newton more...	长度 Long Version S1=34.60mm