

Features :

- Plug in module
- Easy to connect & replace in Flexys GT35, Flexys rail, Flexys Panel TX4 & EXP-FLEX-2M
- Configured via selpro software
- Spring type pluggable terminals


Electrical specifications

No. of channels	4 channels
Output range	0-20mA
Digital resolution	0.0 to 100.0% = 0 to 20mA
Input impedance in signal range	≤800Ω
Accuracy	±0.25% of full scale
Non linearity	±0.25% of full scale
Conversion time	100ms
Over range value	10% of full scale

General specifications

Ambient operating temperature	0°C to 55°C
Humidity	95%
Ambient storage temperature	-20°C to 70° C
Weight	40 gms

Terminal diagram

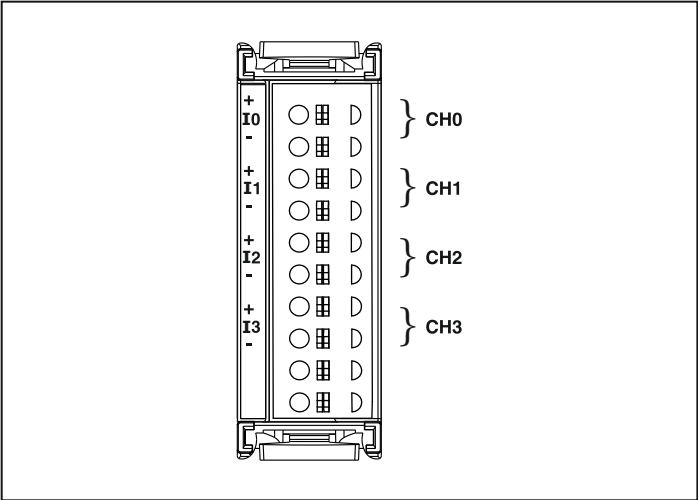

Ordering information

Product Code	Description	Certification
FL-SC-AO04-I-CE-RoHS	4 Channels analog output card - Current	CE RoHS