

Features :

- Plug in module
- Easy to connect & replace in Flexys GT35, Flexys rail, Flexys Panel TX4 & EXP FLEX 2M
- Configured via selpro software
- Spring type pluggable terminals


Electrical specifications

No. of channels	4 Channels
Output range	0-10V DC
Digital resolution	0.0 to 100.0% = 0 to 10 volt
Input Impedance in signal range	≥1kΩ
Accuracy	±0.25% of full scale
Non linearity	±0.25% of full scale
Conversion time	100ms
Short circuit protection	Voltage output has short circuit protection but the long period of short circuit may cause internal wire damage

General specifications

Ambient operating temperature	0°C to 55°C
Humidity	95%
Ambient storage temperature	-20°C to 70°C
Weight	40gms

Terminal diagram

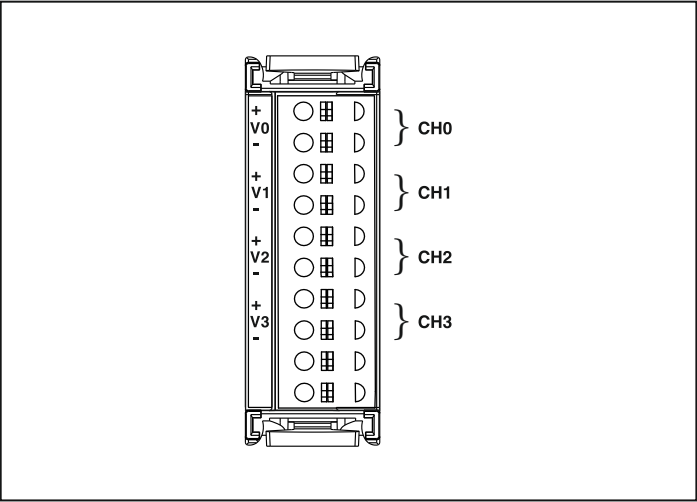

Ordering information

Product code	Description	Certification
FL-SC-AO04-V-CE-RoHS	4 Channel analog output card - Voltage	CE RoHS