



Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical specification

Input specifications


Analog input

No. of inputs	2
Conversion time	100 ms
Analog type	Voltage
Measurement range	0-10V (DC)
Input impedance in signal range	$\geq 330k$
Accuracy	$\pm 0.25\%$ of full scale
Resolution	2.44mV
Digital resolution	12bits
Isolation between card	1.5kV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

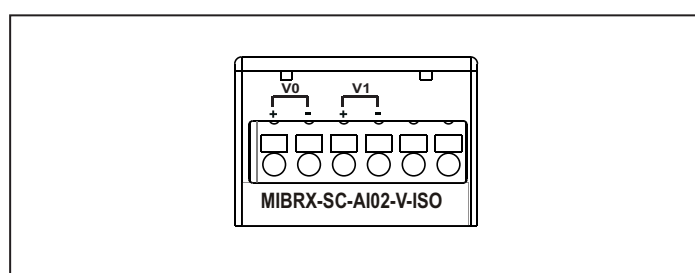

Ordering information

Product code	Description	Certification
MIBRX-SC-AI02-V-ISO	MiBRX Slot Card - 2 Analog inputs - Voltage (Isolated)	CE RoHS