



Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical Specification


Input specifications

Memory storage	2MB
Minimum logging interval time	10 Sec
Maximum no of groups	15
Endurance	100000 Programs / Erase cycles per page minimum
Data retention	20 Years
In-Built RTC	Yes

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

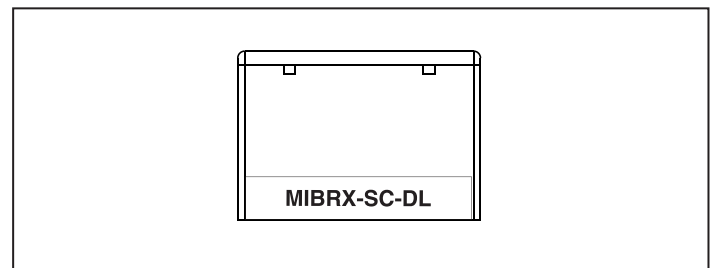

Ordering information

Product code	Description	Certification
MIBRX-SC-DL	MiBRX Slot Card - Datalogging (2MB) & RTC	CE