

Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical specification

Input specifications


Fast Input

No. of Inputs	2 (CH 1)
Input type	PNP/NPN Selectable (on Terminal)
Input voltage	10 to 30VDC
Response time	10 ms (Selectable through software via debounce parameters)
Maximum counting Frequency	10KHz quad (5KHz)
Isolation between Inputs	2kV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

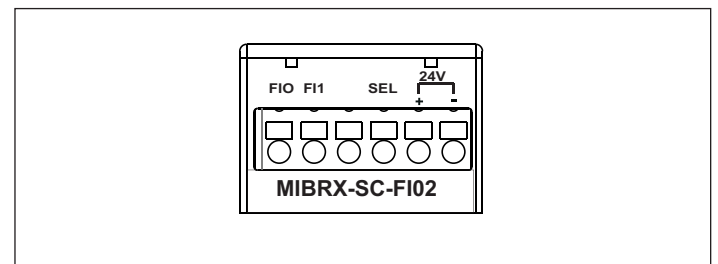

Ordering information

Product code	Description	Certification
MIBRX-SC-FI02	MiBRX Slot card - 2 Fast inputs (upto 10KHz)	CE RoHS compliant