



Features

- Plug-in module
- Easy to connect and replace in all MiBRX base modules
- Configured via Selpro software

Technical specification


Input specifications

No. of inputs	2
Conversion time	25ms to 200ms
Input type	Differential
Excitation output voltage	5V DC $\pm$ 10%/50mA (Jumper selection) 9V DC $\pm$ 10%/50mA
Digital resolution	24bits

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

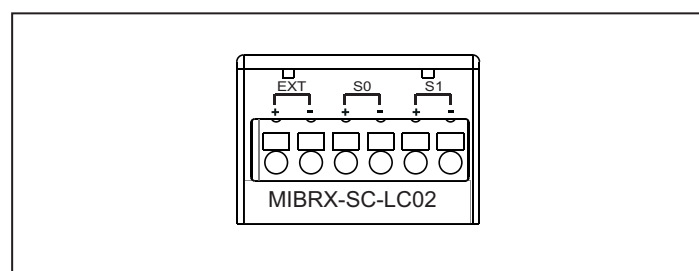

Ordering information

Product code	Description	Certification
MIBRX-SC-LC02	MiBRX Slot card - 2 Analog Inputs - Load cell (24 Bit)	CE