



Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical Specification


Output specifications
Relay output

No. of outputs	5
Output type	PNP
Response time	20 ms (Selectable through software via debounce parameters)
Output current	1A @ 230V AC, 1A @ 30V DC
Isolation between outputs	2.5kV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

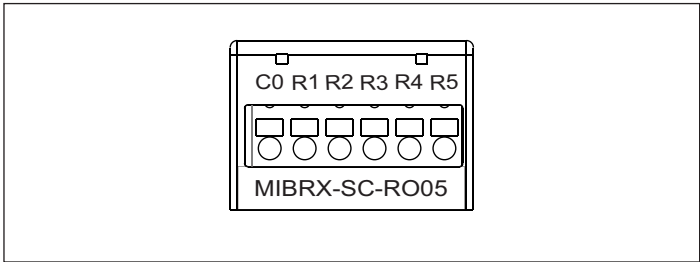

Ordering information

Product code	Description	Certification
MIBRX-SC-RO05	MiBRX Slot Card - 5 Relay Outputs (1.5 A)	CE