


Industrial Power Strip Metal, Lighted Power Switch, 6-Outlet, 6 ft. (1.8 m) Cord

MODEL NUMBER: 6SP

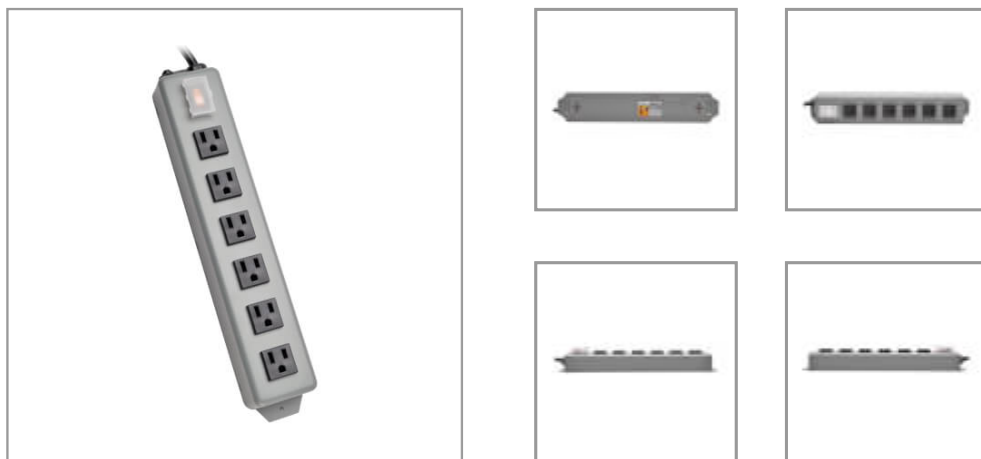

Highlights

- 6 outlets
- 6-ft. (1.83 m) cord
- 13.7-in. overall length
- Lighted master power switch

Package Includes

- 6SP Power Strip
- Warranty information
- Instruction manual

Description

The 6SP Power Strip offers a convenient method of power distribution in workbench, wall-mount or floor-mount applications. Includes six NEMA 5-15R output receptacles with 1.625-inch center-to-center spacing, six-foot (1.8 meters) AC line cord and keyhole mounting tabs for installation in a wide variety of applications. Corded, multi-outlet strip reduces cable clutter and enables the connection of multiple electrical devices to a single AC wall socket. Unfiltered electrical pass-through makes 6SP ideal for distributing alternate waveform UPS or generator power. Features rugged all-metal housing, lighted power switch, 15A resettable circuit breaker and attractive blue/gray color scheme.

Features

- Multi-outlet power strip offers convenient power distribution in workbench, wallmount or floor mount applications
- Includes 6 NEMA 5-15R output receptacles with 1.625-in. center-to-center outlet spacing
- Lighted power switch
- Keyhole mounting tabs for installation in a wide variety of applications
- UL1363 (USA), cUL (Canada)
- 15A power handling capacity with circuit breaker
- 6-ft. (1.83 m) AC line cord

Specifications

| OVERVIEW | |
|------------------------------------|--------------|
| UPC Code | 037332103383 |
| INPUT | |
| Nominal Input Voltage(s) Supported | 120V AC |
| Recommended Electrical Service | 15A 120V |



Powering Business Worldwide

TRIPP LITE
SERIES

| | |
|---|--|
| Voltage Compatibility (VAC) | 120 |
| Input Plug Type | NEMA 5-15P |
| Input Cord Length (ft.) | 6 |
| Right-Angle Plug | No |
| Input Cord Length (m) | 1.83 |
| Integrated Cord Clip | No |
| OUTPUT | |
| Frequency Compatibility | 50 / 60 Hz |
| Output (Watts) | 1800 |
| Output Receptacles | (6) 5-15R |
| Circuit Breaker (amps) | 15 |
| Transformer Accommodation | (2) Yes |
| Outlet Orientation | Single row of 6 |
| Right-Angle Outlets | No |
| Outlet Spacing | 1.625 in. |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | Lighted 2 position switch controls power to all outlets |
| PHYSICAL | |
| Color | Gray |
| Material of Construction | Metal |
| Power Cord Color | Black |
| Housing Color | Blue; Gray |
| Mounting Holes or Slots | Yes |
| Slot or Hole Mount Measurement (Center to Center) | Distance between keyhole tabs = 261.92mm; Distance between end tabs = 330.17mm |
| Outlets Measurement (Center to Center) | 1.62 in. |
| Receptacle Color | Black |
| Shipping Dimensions (hwd / in.) | 14.50 x 3.60 x 6.10 |
| Shipping Dimensions (hwd / cm) | 36.83 x 9.14 x 15.49 |
| Shipping Weight (lbs.) | 2.22 |
| Shipping Weight (kg) | 1.01 |
| Unit Dimensions (hwd / in.) | 1.500 x 13.750 x 2.500 |
| Unit Dimensions (hwd / cm) | 31.75 x 6.35 x 3.8 |
| Outlet Spacing | 1.625 in. |



Powering Business Worldwide

TRIPP LITE
SERIES

| | |
|-------------------------------------|--------------------------------|
| Mounting Details | Includes flanges |
| FEATURES & SPECIFICATIONS | |
| Antimicrobial | No |
| Built-In Circuit Breaker | Yes |
| STANDARDS & COMPLIANCE | |
| Product Certifications | cUL Listed; UL 1363; UL Listed |
| Product Compliance | RoHS |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.