

- NOTES:**
- 1) OPERATING TEMPERATURE RANGE -40°F - +150°F.
 - 2) POLYCARBONATE ENCLOSURE IS RATED TO NEMA TYPE 1, 2, 3, 3R, 3X, 4 AND 4X.

SCREW: NONE	MATERIAL: NONE	REV: B	 connections matter 800-776-9775 www.ilSCO.com	
CAT. NO.: SEE CHART	PLATING: NONE	DRAWN BY:JLC		
INFORMATION SHEET:TBD	MARKING: 	DATE:5/4/2016		
			SCALE:	SIZE: B
			DWG NO: R2671	
			SHEET: 1 OF 1	

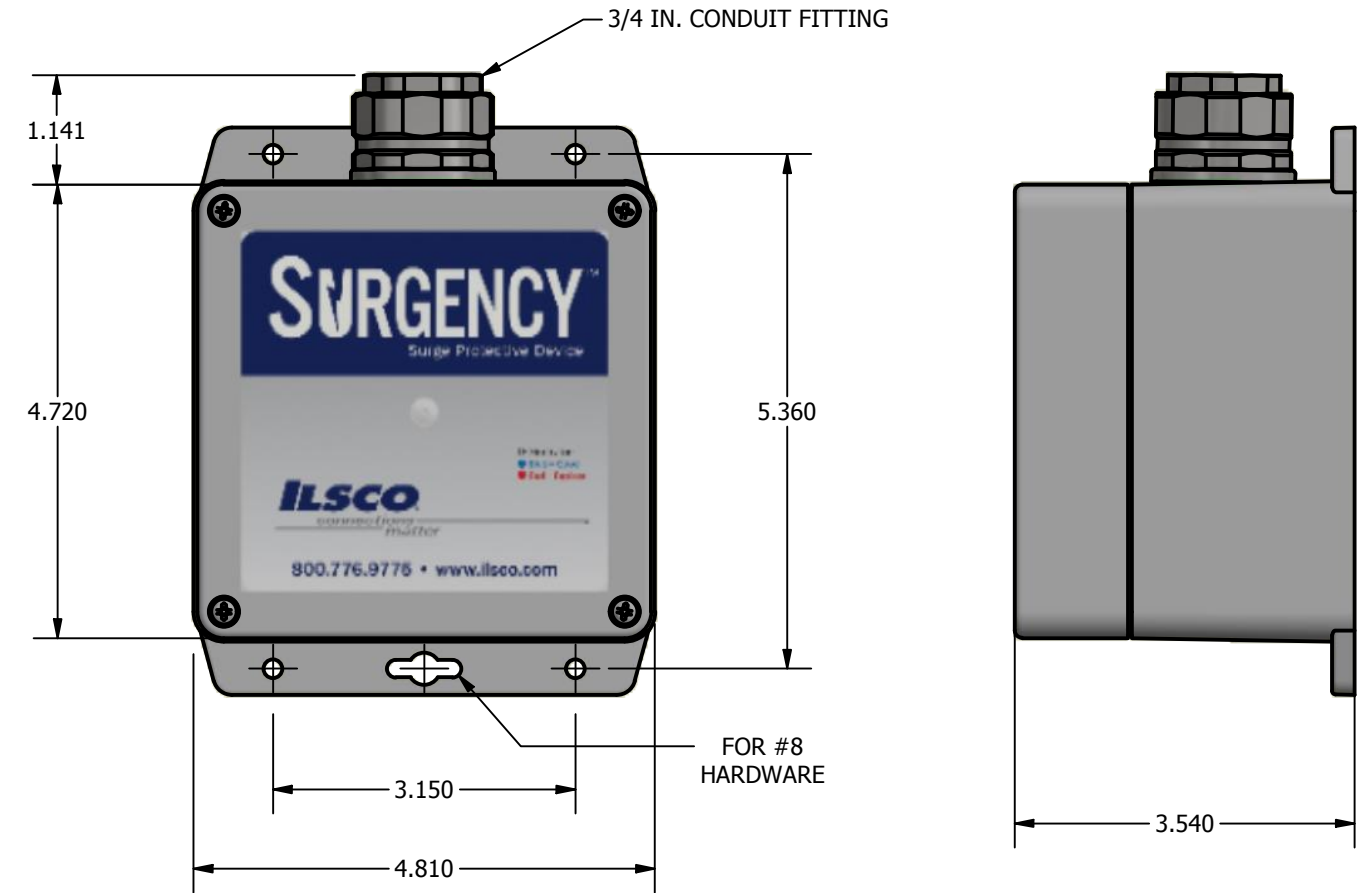


FIGURE 1

CATALOG NUMBER	FIGURE NUMBER	ELECTRICAL CHARACTERISTICS				
		PHASE	SYSTEM	PER MODE SURGE CURRENT	AC FREQUENCY	NOMINAL VOLTAGE
SE-050-1S1X	1	1	SPLIT	50 kA	50/60 Hz	120/240 V
SE-100-1S1X	2	1	SPLIT	100 kA	50/60 Hz	120/240 V
SE-050-3Y1X	1	3	WYE	50 kA	50/60 Hz	208Y/120 V
SE-100-3Y1X	2	3	WYE	100 kA	50/60 Hz	208Y/120 V
SE-050-3Y2X	1	3	WYE	50 kA	50/60 Hz	480Y/277 V
SE-100-3Y2X	2	3	WYE	100 kA	50/60 Hz	480Y/277 V
SE-050-3N4X	1	3	DELTA	50 kA	50/60 Hz	480 V
SE-050-3N2X	1	3	DELTA	50 kA	50/60 Hz	240 V
SE-050-3N6X	1	3	DELTA	50 kA	50/60 Hz	600 V
SE-100-3N4X	2	3	DELTA	100 kA	50/60 Hz	480 V
SE-050-1P1X	1	1	Single	50 kA	50/60 Hz	100/140 V
SE-100-2N2X	2	2	Single	100 kA	50/60 Hz	240 V
SE-050-2N1X	1	2	Single	50 kA	50/60 Hz	120 V
SE-050-2N2X	1	2	Single	50 kA	50/60 Hz	240 V
SE-050-3Y3X	1	3	WYE	50 kA	50/60 Hz	347/600 V
SE-100-3D1X	2	3	DELTA	100 kA	50/60 Hz	240/120 V
SE-100-3N6X	2	3	DELTA	100 kA	50/60 Hz	600 V
SE-050-3D1X	1	3	DELTA	50 kA	50/60 Hz	240/120 V

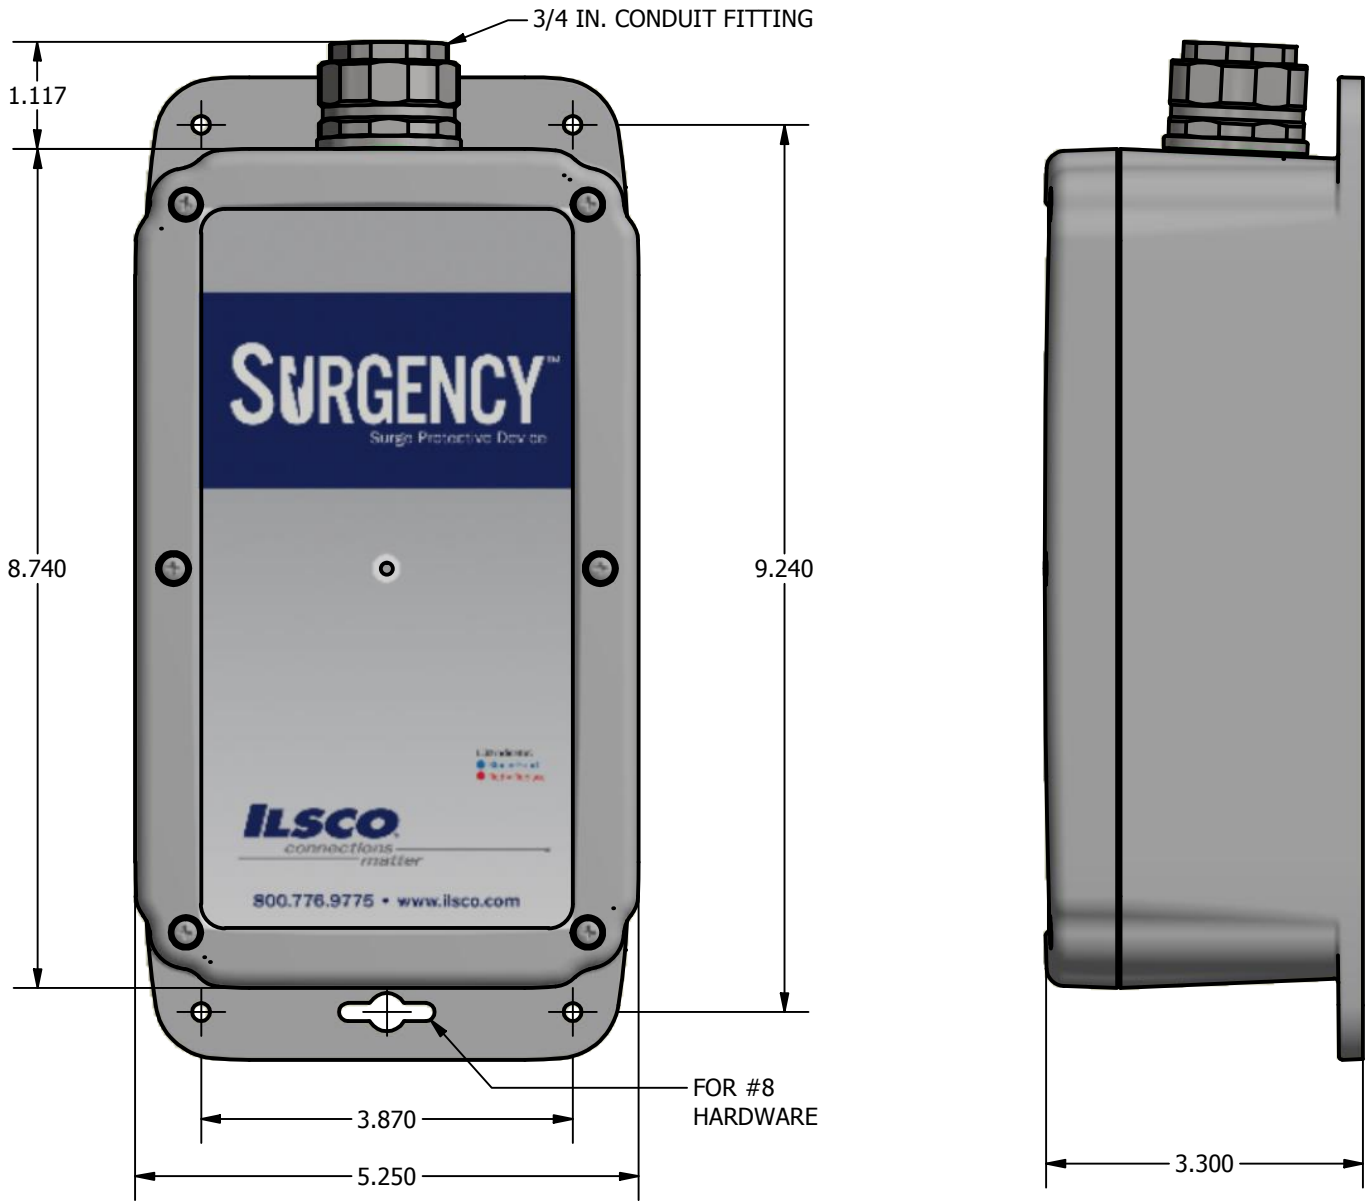


FIGURE 2