


## 17.3kW 3-Phase Vertical PDU Strip, 208V Outlets (54 C13), 0U Rack-Mount, Accessory for Select ATS PDUs

MODEL NUMBER: **PDU3V602D354**

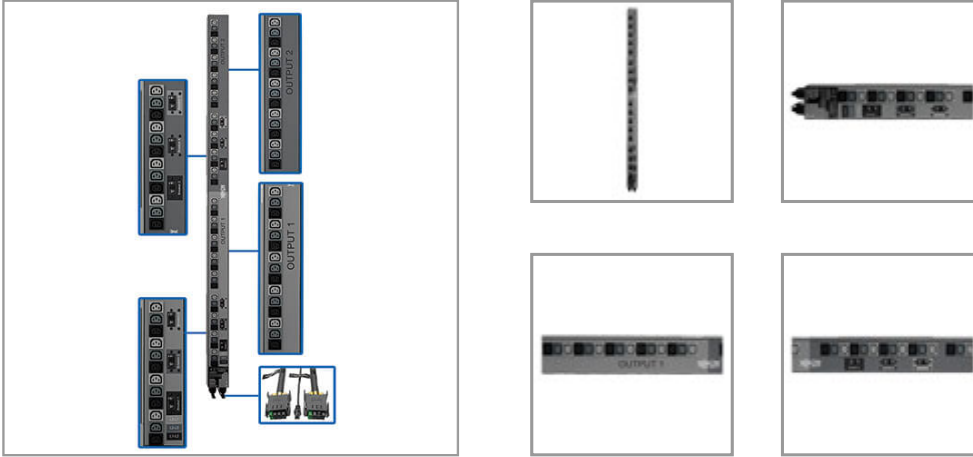

Required rack-mounted vertical outlet strip accessory for select Tripp Lite 3-phase auto-transfer switch (ATS) PDUs. Distributes AC power to high-density equipment racks in data centers and server rooms.

### Description

The PDU3V602D354 17.3kW 3-Phase Vertical PDU Outlet Strip is a required accessory option for Tripp Lite's PDU360AT6G60 and other 3-phase ATS PDUs that specify compatibility with this model. It's recommended for high-density equipment racks in data centers, server rooms and heavily configured equipment racks.

When used with the PDU360AT6G60, the PDU3V602D354 supports up to 17.3kW total output with 27.8A balanced maximum full load per output phase combination (L1–L2, L2–L3, L3–L1) and 13.9A balanced maximum per breakered output load bank (C1–C6).

The 54 single-phase 12A 208V IEC-C13 outlets receive power from the connected ATS PDU. The outlets are interlaced to help you balance loads by spreading connections across the phase combinations throughout the rack. Each outlet is numbered and color-coded to help you keep track of connected devices and which phase combination powers each. Dual 2.5-foot power cords, each with a special eight-position plug, connect directly to the PDU's rear receptacles.

The PDU3V602D354's rugged all-metal housing mounts in compatible racks with no tools needed. Vertical 0U installation reduces cord clutter and improves airflow through the rack.

### Features

#### Required Accessory for Select Tripp Lite ATS PDUs

- Compatible with PDU360AT6G60 and other select Tripp Lite 3-phase ATS PDUs
- Recommended for high-density equipment racks in data centers and server rooms
- Saves rack space, improves airflow and reduces cord clutter by locating outlets closer to connected devices

### Highlights

- Required for select Tripp Lite 3-phase ATS PDUs
- Offers 54 single-phase 12A 208V IEC-C13 outlets
- Supports up to 17.3kW total output
- Simplifies load balancing with interlaced, color-coded outlets
- Supports 0U toolless vertical rack mounting

### Package Includes

- PDU3V602D354 17.3kW 3-Phase Vertical PDU Outlet Strip, 54 C13 Outlets



Powering Business Worldwide



- Supports up to 17.3kW total output with 27.8A maximum per output phase combination and 13.9A max per breakered output load bank
- Heavy-duty 2.5 ft. power cords with proprietary 8-position plugs connect to ATS PDU

#### 54 C13 Interlaced 208V Outlets

- Single-phase 12A IEC-C13 outlets help balance loads by spreading connections across phase combinations (L1–L2, L2–L3, L3–L1) throughout the rack
- Numbered and color-coded for easy ID of connected devices and which phase combination powers them
- 20A double-pole magnetic circuit breakers protect against overload

#### Installs Easily in 0U of Rack Space

- Preinstalled mounting buttons for toolless vertical rack-mounting in compatible racks
- Preinstalled grounding lug for connecting devices that require chassis ground
- Heavy-duty all-metal housing provides durability in demanding rack environments

## Specifications

| OVERVIEW                   |                                                                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UPC Code                   | 037332192493                                                                                                                                                                                                                    |
| Accessory Type             | 0U Strip for 3-Phase ATS PDU                                                                                                                                                                                                    |
| Accessory Class            | PDU Accessories                                                                                                                                                                                                                 |
| DISPLAY                    |                                                                                                                                                                                                                                 |
| Accessories (Included)     | Mounting hardware                                                                                                                                                                                                               |
| INPUT                      |                                                                                                                                                                                                                                 |
| Input Phase                | 3-Phase                                                                                                                                                                                                                         |
| Maximum Input Amps         | 48                                                                                                                                                                                                                              |
| Maximum Input Amps Details | 48A total 208V 3 Phase input (24A max per input cord)                                                                                                                                                                           |
| Input Cord Details         | Includes 7 conductor input plug for use with compatible Tripp Lite ATS PDU products only                                                                                                                                        |
| Input Cord Length (ft.)    | 2.5                                                                                                                                                                                                                             |
| Input Cord Length (m)      | 0.76                                                                                                                                                                                                                            |
| OUTPUT                     |                                                                                                                                                                                                                                 |
| Output Capacity Details    | Supports up to 17.3kW total output; 27.8A max per output phase (L1-L2, L2-L3, L3-L1), 13.9A max per breakered output load bank (C1-C6) when used with Tripp Lite's PDU360AT6G60 ATS; All configurations: 12A max per C13 outlet |
| Frequency Compatibility    | 50 / 60 Hz                                                                                                                                                                                                                      |
| Output Receptacles         | (54) C13                                                                                                                                                                                                                        |
| Output Nominal Voltage     | 200; 208; 220; 230; 240                                                                                                                                                                                                         |



Powering Business Worldwide



| PHYSICAL                            |                                                                                                   |
|-------------------------------------|---------------------------------------------------------------------------------------------------|
| Material of Construction            | Metal                                                                                             |
| Form Factors Supported              | Vertical rackmount installation supported with toolless mounting in button-mount compatible racks |
| PDU Form Factor                     | Vertical (0U)                                                                                     |
| Shipping Dimensions (hwd / in.)     | 7.28 x 7.68 x 79.53                                                                               |
| Shipping Dimensions (hwd / cm)      | 18.49 x 19.51 x 202.01                                                                            |
| Shipping Weight (lbs.)              | 24.97                                                                                             |
| Shipping Weight (kg)                | 11.33                                                                                             |
| Unit Dimensions (hwd / in.)         | 70.000 x 4.000 x 2.170                                                                            |
| Unit Dimensions (hwd / cm)          | 177.8 x 10.16 x 5.51                                                                              |
| Unit Weight (lbs.)                  | 19                                                                                                |
| Unit Weight (kg)                    | 8.62                                                                                              |
| ENVIRONMENTAL                       |                                                                                                   |
| Operating Temperature Range         | 0 to 50C (32 to 122F)                                                                             |
| Storage Temperature Range           | -15C to 60C (5 to 140F)                                                                           |
| Relative Humidity                   | 5-95% non-condensing                                                                              |
| Operating Elevation                 | 0-10,000                                                                                          |
| WARRANTY & SUPPORT                  |                                                                                                   |
| Product Warranty Period (Worldwide) | 2-year limited warranty                                                                           |

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.