



CFB750-300S SERIES 750 WATT 2:1 INPUT ISOLATED DC-DC CONVERTER

Features

- Efficiency to 91%
- Fixed Switching Frequency
- Remote On/Off
- Fully Protected (OTP/OCP/OVP/UVLO)
- 3000Vac I/O Isolation
- Operating Case Temperature -40 to +85°C
- Full-Brick Size Meet Industrial Standard
4.60"x2.40"x0.5"
- Shock & Vibration MIL-STD-810F(EN 61373) Compliant
- Fire & Smoke EN 45545-2 Compliant
- 2000m Operating Altitude
- Safety Meets UL/IEC/EN 62368-1



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF. (1)	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CFB750-300S12	200-425VDC	12VDC	0 mA	62.5 A	10 mA	2.84 A	89	10000uF
CFB750-300S15	200-425VDC	15VDC	0 mA	50 A	10 mA	2.84 A	89	10000uF
CFB750-300S24	200-425VDC	24VDC	0 mA	31.2 A	10 mA	2.78 A	90	10000uF
CFB750-300S28	200-425VDC	28VDC	0 mA	26.7 A	10 mA	2.78 A	90	10000uF
CFB750-300S36	200-425VDC	36VDC	0 mA	20.8 A	10 mA	2.78 A	90	8000uF
CFB750-300S48	200-425VDC	48VDC	0 mA	15.6 A	10 mA	2.78 A	91	8000uF

NOTE:

1. Nominal Input Voltage 300 VDC.
2. The Output Terminal Required a Minimum Capacitor 1000uF to Maintain Specified Regulation.
3. Require a Ceramic Capacitor 1500pF Connected Between ±Vin to Case for All Models.
4. An External Input Capacitor 330uF for All Models Are Recommended To Reduce Input Ripple Voltage.
5. Measure at Nominal Input Voltage.

PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Remote On/Off Logic	Mounting Inserts
CFB750-	II	O	XX	L	-Y (Option)
CFB750	300 : 300 VDC	S : Single	12 : 12VDC 15 : 15VDC 24 : 24VDC 28 : 28VDC 36 : 36VDC 48 : 48VDC	None : Positive N : Negative	None : Clear Mounting Insert (3.5mm DIA.)

Part Number Example:

CFB750-300S28N: Full Brick, 750W, 2:1 200-425Vdc Input, Single 28Vdc Output, Negative Logic, Clear Mounting Insert



CFB750-300S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3		425	V _{dc}
Input Surge Voltage	100ms max.	All			475	V _{dc}
Operating Case Temperature	At the center part of base plate	All	-40		85	°C
Storage Temperature		All	-55		105	°C

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units	
Operating Input Voltage		All	200	300	425	V _{dc}	
Input Under Voltage Lockout							
Turn-On Voltage Threshold		All	185	190	195	V _{dc}	
Turn-Off Voltage Threshold		All	175	180	185	V _{dc}	
Lockout Hysteresis Voltage		All		10		V _{dc}	
Input Over Voltage Protection							
Module-On Voltage		All		480		V _{dc}	
Module -Off Voltage		All		500		V _{dc}	
Maximum Input Current	V _{in} =200V, Full load	All		4.3		A	
No-Load Input Current	V _{in} =300V, I _o =0A	See Model Number Table					mA
Input Filter	Pi Filter	All					
Inrush Current (I ² t)	As per ETS300 132-2	All		0.1		A ² s	
Input Reflected Ripple Current	P-P Thru 12uH Inductor, 5Hz to 20MHz	All		60		mA	

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	V _{in} =300V, Full load, T _c =25°C	All	-1.0		+1.0	%
Output Voltage Regulation						
Load Regulation	Full load to no load	All			±0.5	%
Line Regulation	V _{in} =Low line to high line, full load	All			±0.2	%
Temperature Coefficient	T _c =-40°C to 85°C	All			±0.02	%/°C
Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth)						
Peak-to-Peak	Full load, 1000uF aluminum and 1.0uF ceramic capacitors	V _o =12V			300	mV
		V _o =15V			300	
		V _o =24V			600	
		V _o =28V			600	
		V _o =36V			650	
		V _o =48V			750	
		RMS.	Full load, 1000uF aluminum and 1.0uF ceramic capacitors	V _o =12V		
V _o =15V					150	
V _o =24V					300	
V _o =28V					300	
V _o =36V					300	
V _o =48V					350	
Output Current Range	V _{in} = 200 to 425V			See Model Number Table		
Over Current Protection	Continuous current. Auto recovery	All	105	115	125	%
Short Circuit Protection		All	Continuous, Auto Recovery			
External Load Capacitance	Full Load (resistive)	See Model Number Table				uF
Output Voltage Trim Range	P _o ≤ max. rated power, I _o ≤ I _{o_max} .	All	-40		+10	%



CFB750-300S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Remote Sense Range	$P_o \leq \text{max. rated power}$, $I_o \leq I_{o_max}$. % of nominal V_o	All			+10	%
Over Voltage Protection	Limited voltage, % of nominal V_o	All	115	125	140	%
Auxiliary Output Voltage		All	7	10	13	V
Auxiliary Output Current		All			20	mA
Power Good Signal (IOG)	V_{out} Ready: low level, sink current	All			20	mA
	V_{out} not Ready: open drain output, applied voltage	All			50	V
Load Share Accuracy (50%-100% load)	The condition is to use two modules. If you use more modules, please contact cincon	All	-10		+10	%

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	$V_{in}=300V$		See Model Number Table			%

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	75% to 100% of I_{o_max} . step load change $di/dt=0.1A/us$ (within 1% V_{out} nominal)	All			± 5	%
Recovery Time		All			500	us
Turn-On Delay and Rise Time						
Full load (constant resistive load)						
Turn-On Delay Time, From On/Off Control	$V_{on/off}$ to 10% V_{o_set} , Remote on	All		100		ms
Turn-On Delay Time, From Input	$V_{in_min.}$ to 10% V_{o_set} , Power up	All		600		ms
Output Voltage Rise Time	10% V_{o_set} to 90% V_{o_set}	All		40		ms

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage (100% factory hi-pot tested @2sec.)	1 Minute; input to output	All			3000 4200	V_{ac} V_{dc}
	1 Minute; input to case (base plate)	All			2500 3500	V_{ac} V_{dc}
	1 Minute; output to case (base plate)	All			500 700	V_{ac} V_{dc}
Isolation Resistance	Input to output	All	10			M Ω
Isolation Capacitance	Input to output	All		NC		pF
	Input to case (base plate)	All		NC		
	Output to case (base plate)	All		20000		

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse width modulation (PWM), fixed	All	170	200	230	KHz
On/Off Control, Positive Remote On/Off Logic, Refer to -Vin Pin						
Logic Low (Module Off)	$V_{on/off}$ at $I_{on/off}=1.0mA$	All	0		1.2	V
Logic High (Module On)	$V_{on/off}$ at $I_{on/off}=0.0uA$	All	3.5 or Open Circuit		75	V
On/Off Control, Negative Remote On/Off Logic, Refer to -Vin Pin						
Logic High (Module Off)	$V_{on/off}$ at $I_{on/off}=0.0uA$	All	3.5 or Open Circuit		75	V
Logic Low (Module On)	$V_{on/off}$ at $I_{on/off}=1.0mA$	All	0		1.2	V
On/Off Current (for Both Remote On/Off Logic)	$I_{on/off}$ at $V_{on/off}=0.0V$	All		0.3	1	mA
Leakage Current (for Both Remote On/Off Logic)	Logic high, $V_{on/off}=15V$	All			30	uA
Off Converter Input Current	Shutdown input idle current	All		5	10	mA



CFB750-300S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Over Temperature Shutdown	Temperature at the center part of base plate, non-latching	All		95		°C
Over Temperature Recovery		All		75		°C

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ of I_{o_max} ; MIL-HDBK - 217F_Notice 1, GB, 25°C	All		370		K hours
Weight		All		230		grams
Case Material	Plastic, DAP, UL 94V-0					
Base plate Material	Aluminum					
Potting Material	UL 94V-0					
Pin Material	Base: Copper Plating: Nickel with Matte Tin					
Shock/Vibration	MIL-STD-810F/EN 61373 Compliant					
Humidity	95% RH max. Non condensing					
Altitude	2000m Operating altitude, 12000m Transport altitude					
Thermal Shock	MIL-STD-810F					



EMC SPECIFICATIONS (External components required, please refer to application note.)

EMI	Meets EN 55032 (with external filter)				Class A	
ESD	Meets IEC/EN 61000-4-2	Air \pm 8kV, Contact \pm 4kV		Perf. Criteria A		
Radiated Immunity	Meets IEC/EN 61000-4-3	3 V/m		Perf. Criteria A		
Fast Transient	Meets IEC/EN 61000-4-4	\pm 1kV, external components required		Perf. Criteria A		
Surge	Meets IEC/EN 61000-4-5 EN 55024: Line to earth \pm 4kV, Line to line \pm 2kV, external components required				Perf. Criteria A	
Conducted Immunity	Meets IEC/EN 61000-4-6	3Vrms		Perf. Criteria A		
Power Frequency Magnetic Field Immunity	Meets IEC/EN 61000-4-8	50/60Hz, 3A/m (r.m.s.)		Perf. Criteria A		
Application Note Link	CFB750-300S Series App Notes					
Packaging Information Link	Packaging Information					




CFB750-300S Series

CHARACTERISTIC CURVE

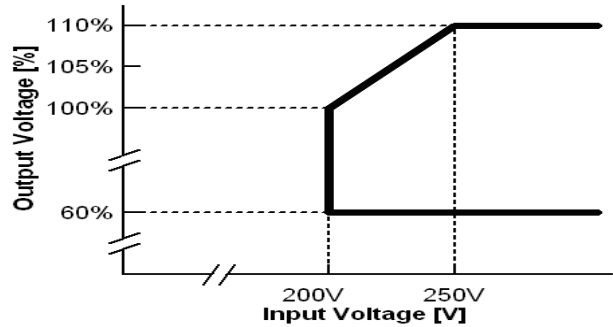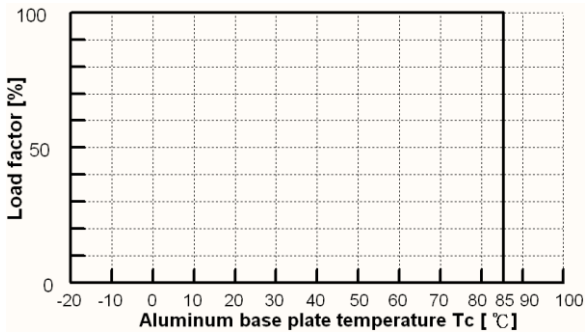


Power Derating Curve


CFB750-300S12,15 Derating Curve without Heatsink (Vin=300V)

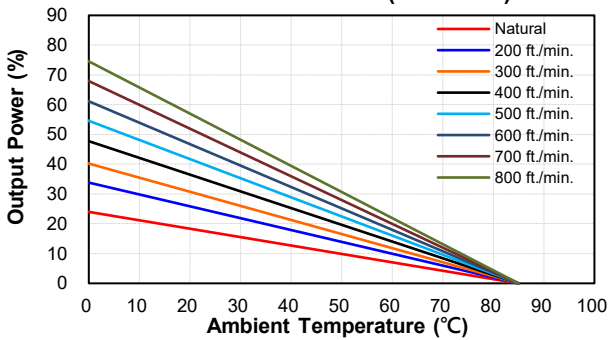


CFB750-300S12,15 Derating Curve with Heatsink FBL254 (Vin=300V)

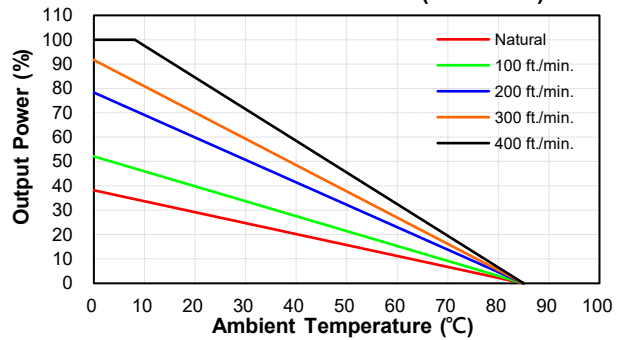


CFB750-300S24,28,36 Derating Curve without Heatsink (Vin=300V)

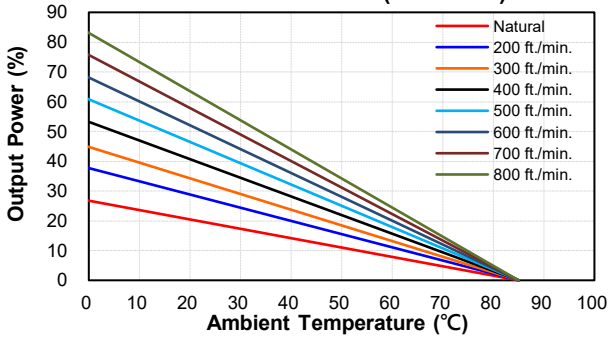


CFB750-300S24,28,36 Derating Curve with Heatsink FBL254 (Vin=300V)

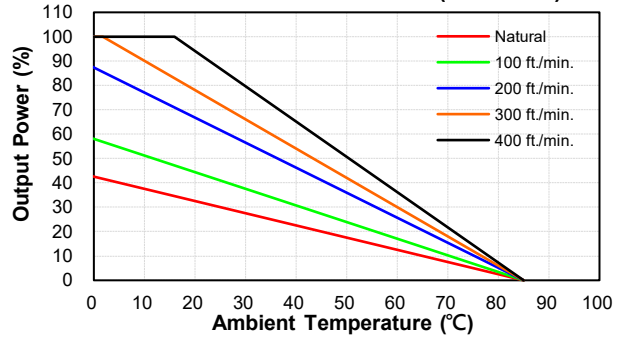

CFB750-300S48 Derating Curve without Heatsink (Vin=300V)

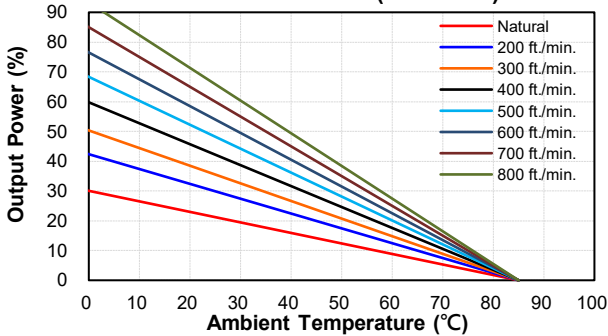

CFB750-300S48 Derating Curve with Heatsink FBL254 (Vin=300V)

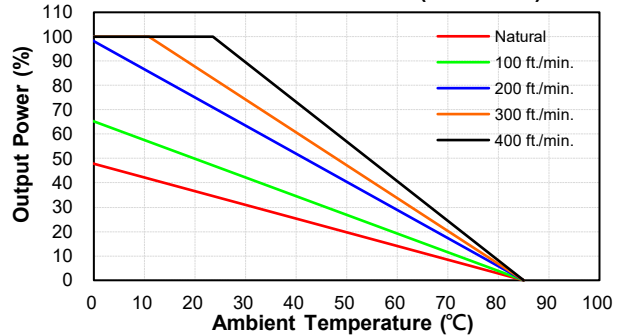





CFB750-300S Series

Performance Data


CFB750-300S12
Eff Vs Io @25 Deg. C

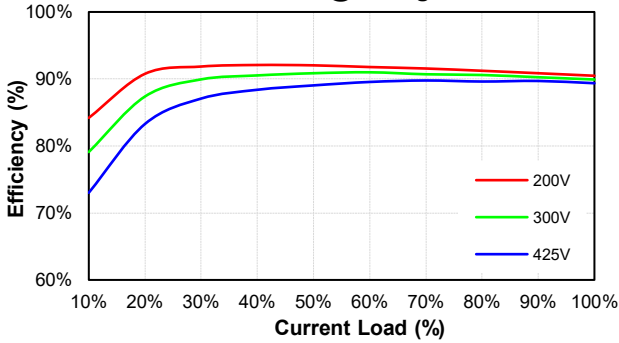


CFB750-300S12
Pd Vs Po @25 Deg. C

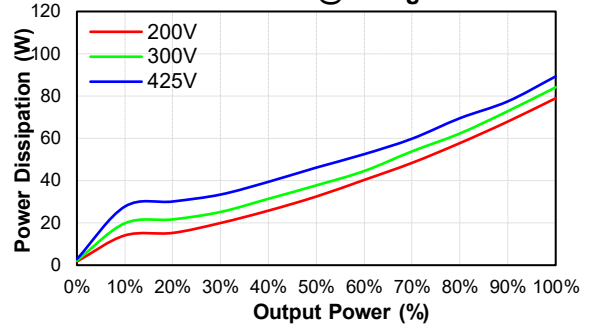


CFB750-300S15
Eff Vs Io @25 Deg. C

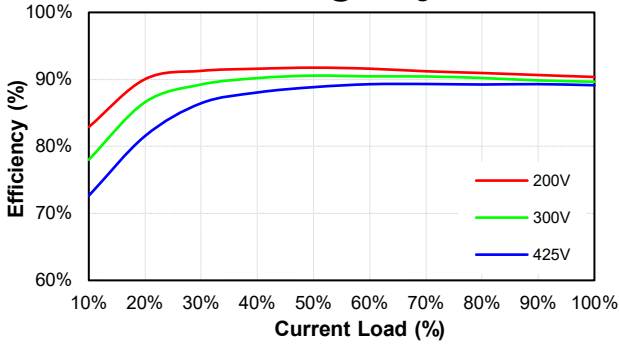


CFB750-300S15
Pd Vs Po @25 Deg. C

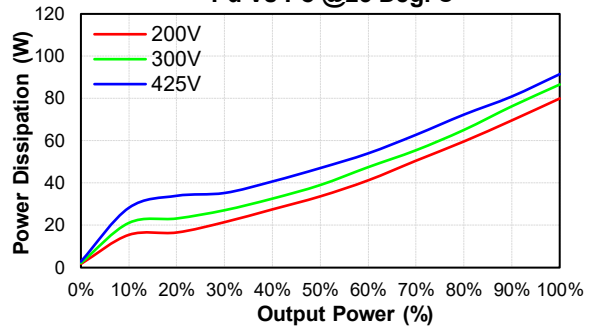


CFB750-300S24
Eff Vs Io @25 Deg. C

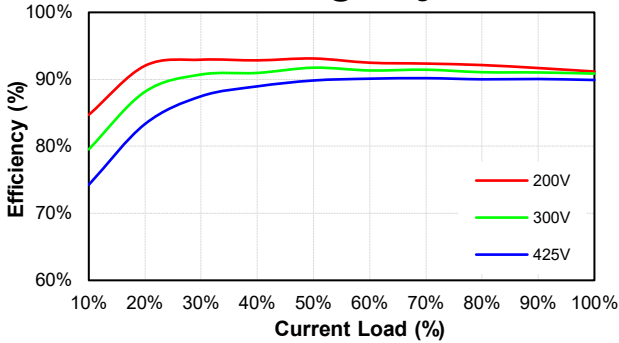


CFB750-300S24
Pd Vs Po @25 Deg. C

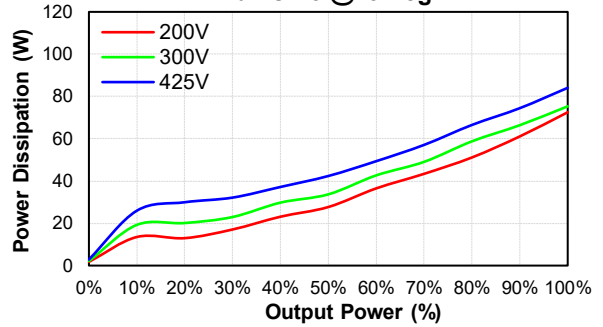

CFB750-300S28
Eff Vs Io @25 Deg. C

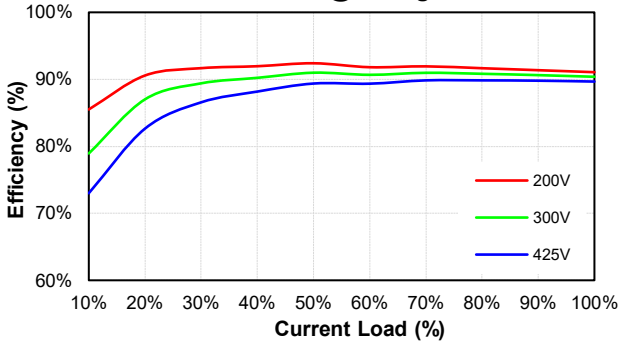


CFB750-300S28
Pd Vs Po @25 Deg. C

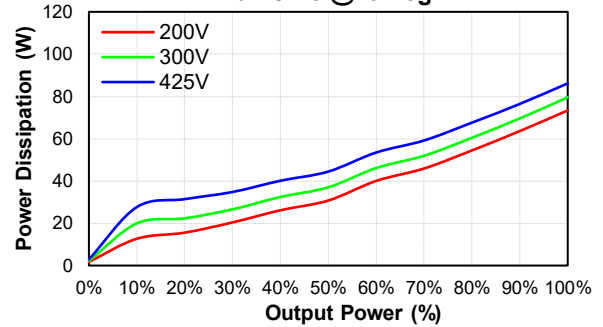




CFB750-300S Series


CFB750-300S36
Eff Vs Io @25 Deg. C

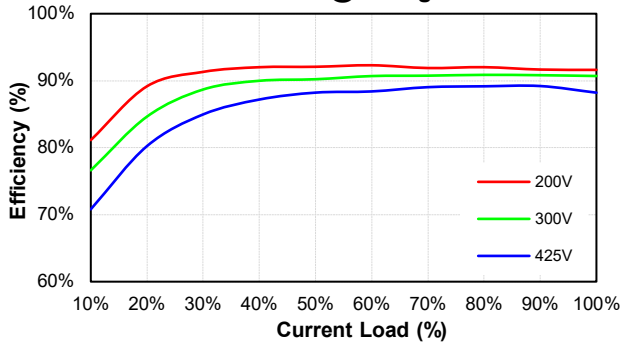


CFB750-300S36
Pd Vs Po @25 Deg. C

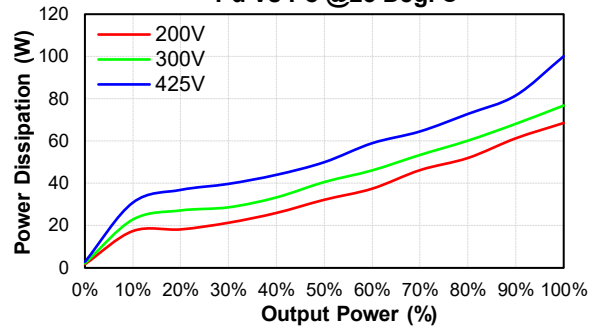

CFB750-300S48
Eff Vs Io @25 Deg. C

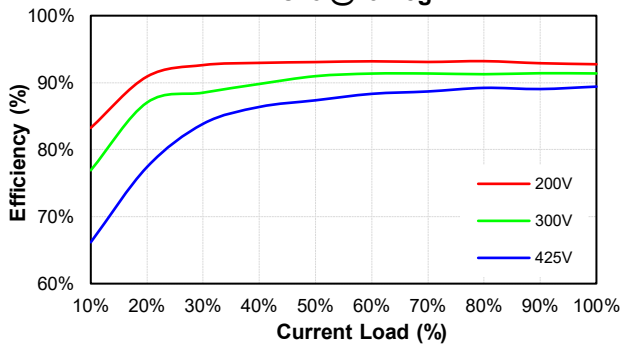


CFB750-300S48
Pd Vs Po @25 Deg. C

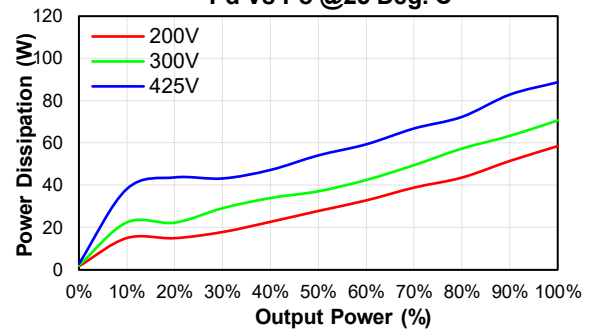



CFB750-300S Series

MECHANICAL SPECIFICATION

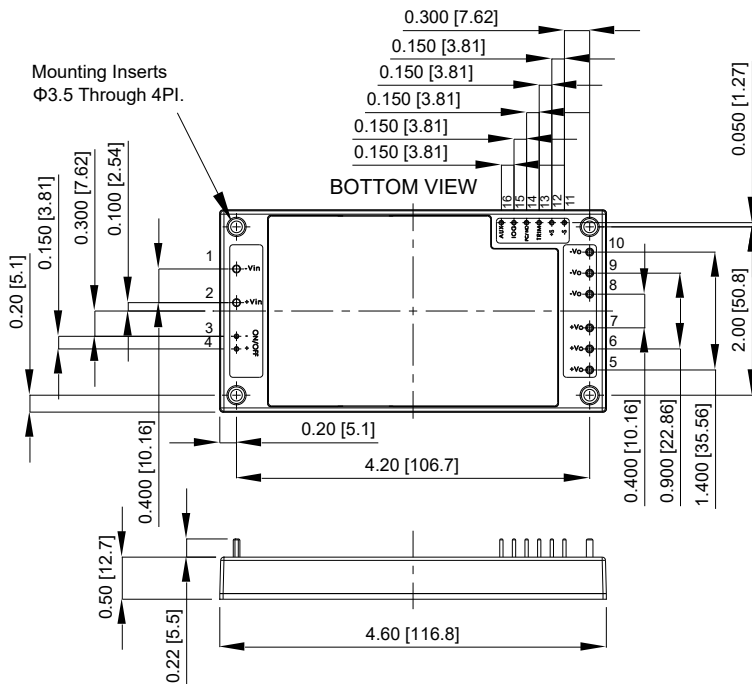

PIN CONNECTION	
PIN	Function
1	-V Input
2	+V Input
3	-On/Off
4	+On/Off
5-7	+V Output
8-10	-V Output
11	-Sense
12	+Sense
13	Trim
14	PC
15	IOG
16	AUX

NOTE: Pin Size is 0.04±0.004 Inch [1.0±0.1 mm]DIA
 Pin Size is 0.08±0.004 Inch [2.0±0.1 mm]DIA
 All Dimensions In Inches [mm]
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com
 Web: www.cincon.com