

1.5W CONVECTION COOLED

DC-HVDC CONVERTER

The A Series is a broad line of ultra-miniature, DC to HV DC converters that set an industry standard in high voltage miniaturization. This unique package occupies less than one tenth of a cubic inch of volume, and an extremely low profile of only 0.250 inches (6.35mm).

Controllable output voltages range from 100 volts to 6000 volts. The output is directly proportional to the input voltage and is linear from <0.7V input to maximum input voltage, allowing for an adjustable output voltage. Output is load dependent. Isolation permits <±500V bias on output return. No external components or minimum load are required.

A separate high impedance control pin is standard and is designed for external error amplifier and/or DAC control in closed or open loop systems. Or simply connect the control pin to the + input for proportional input to output operation. These component-sized converters are ideal for applications requiring minimal size and weight.



Features

- Output voltages from 100V to 6000V
- Output proportional to input
- 0.7VDC turn-on voltage
- Extremely low profile <0.25"
- Input to output isolation
- Short circuit protection
- Control pin
- No minimum load
- 3 year warranty

Typical Applications



- Avalanche Photo Diodes
- Photo Multiplier Tubes
- Electrophoresis
- Capacitor Charging
- Sustaining Ion Pumps
- Piezo Devices
- Handheld Instruments

Dimensions

All models:

Height x Width: 6.35 x 11.43mm (0.25" x 0.45")

100V to 2000V outputs:

Length: 23.37mm (0.92")

6000V outputs:

Length: 33.78mm (1.33")

3000V to 5000V outputs:

Length: 28.69mm (1.13")

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	0.7		5, 12, 24	VDC	See Models & Ratings table
Input Current			625	mA	See Models & Ratings table
Control Voltage Input	Analog Control Voltage adjusts output from 0 to 100%, not to exceed Input Voltage, see Application Notes on Page 8 for details				

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage			6000	VDC	See Models & Ratings table
Output Current			15	mA	See Models & Ratings table
Output Voltage Tolerance		±10		%	At Max Vout, Full Load
Minimum Load	No minimum load required				
Regulation	Unregulated, Output is proportional to Input. See Application Notes				
Short Circuit Protection	Protected against short circuit conditions for a minimum 1 minute.				
Ripple and Noise			5	%	See Models & Ratings table

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature (case)	-25		+75	°C	Standing operating temp, all models
Storage Temperature	-55		+105	°C	
Cooling	Natural convection				
Humidity			95	%RH	Non-condensing

Safety Approvals

Safety Agency	Standard	Notes & Conditions
UL	IEC/UL/CSA/EN 62368	
CE	Meets all applicable directives	
RoHS	RoHS 2 and 3 Directive (2011/65/EU)	Where applicable

General


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Isolation: Input to Output			500	V	<±500VDC Bias on Output Return
Leakage Current			100	mA	
Switching Frequency	50		350	kHz	
Construction	Solid vacuum encapsulation, UL 94 V-0 rated				
Mean Time Between Failure	1.862			Mhrs	Per Bellcore TR 332

Notes:

- Maximum output current is available at maximum rated output voltage, and derates linearly as input voltage is decreased.
- Output Voltage is load dependent. Under light or no-load conditions, reduce the Input Voltage so maximum rated Output Voltage is not exceeded.

- Specifications are after 30 minute warm-up, full-load at 25°C, unless otherwise noted.
- Proper thermal management techniques are required to maintain safe case temperature at maximum power output.

Block Diagram

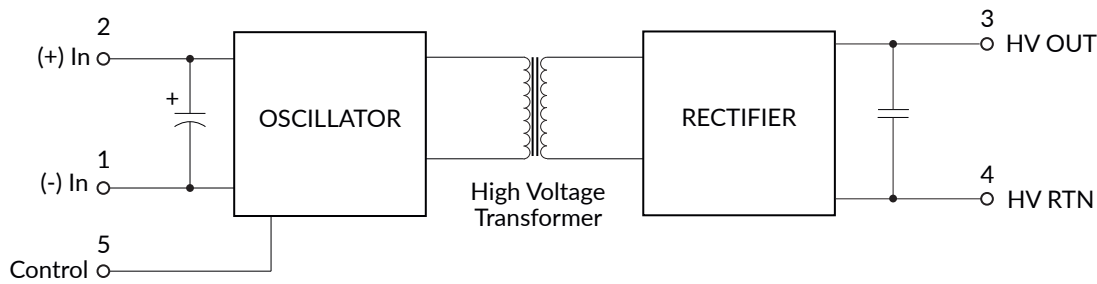

Pin	Function
1	(-) Input
2	(+) Input
3	HV Out
4	HV RTN
5	Control

Models & Ratings

Model Number	Output Voltage	Output Current	Input Voltage	Input Current		Ripple
				No Load	Full Load	
AH01N-12	0 to -100V	15mA	12V	<125mA	<250mA	<2%
AH01P-12	0 to +100V	15mA	12V	<125mA	<250mA	<2%
AH02N-12	0 to -200V	7.5mA	12V	<125mA	<250mA	<3%
AH02P-5	0 to +200V	7.5mA	5V	<300mA	<550mA	<3%
AH025P-5	0 to +250V	6mA	5V	<300mA	<550mA	<1.2%
AH025P-12	0 to +250V	6mA	12V	<125mA	<250mA	<1.2%
AH05N-5	0 to -500V	3mA	5V	<300mA	<550mA	<0.7%
AH05N-12	0 to -500V	3mA	12V	<125mA	<250mA	<0.75%
AH05P-5	0 to +500V	3mA	5V	<300mA	<550mA	<0.7%
AH05P-12	0 to +500V	3mA	12V	<125mA	<250mA	<0.7%
AH08P-5	0 to +800V	1.87mA	5V	<300mA	<550mA	<1.2%
AH09P-24	0 to +900V	1.67mA	24V	<40mA	<120mA	<1.2%
AH10N-12	0 to -1000V	1.5mA	12V	<125mA	<250mA	<1%
AH15P-5	0 to +1500V	1mA	5V	<300mA	<550mA	<0.6%
AH20N-12	0 to -2000V	0.75mA	12V	<125mA	<250mA	<0.5%
AH20P-5	0 to +2000V	0.75mA	5V	<300mA	<550mA	<0.5%
AH30P-12	0 to +3000V	0.5mA	12V	<125mA	<250mA	<0.3%
AH60N-5	0 to -6000V	0.25mA	5V	<400mA	<625mA	<0.3%
AH60P-5	0 to +6000V	0.25mA	5V	<400mA	<625mA	<0.3%


Notes:

1. Other voltages available on request - please contact our dedicated support team: xppower.com/contact


Mechanical Details

100V - 2000V


Top View

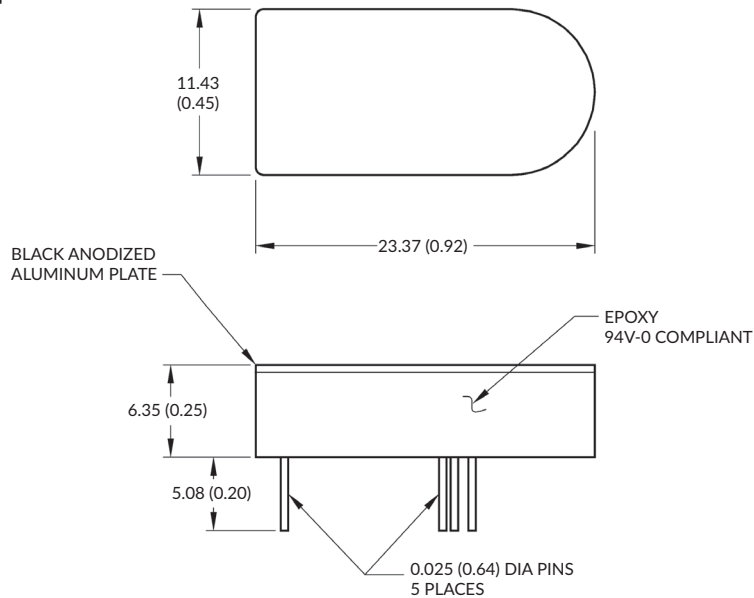

Bottom View

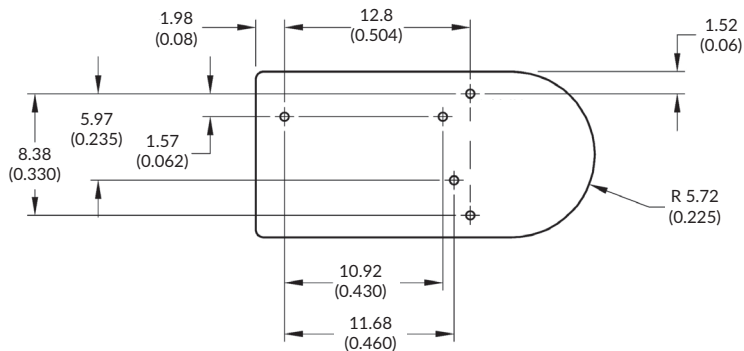

Recommended Layout

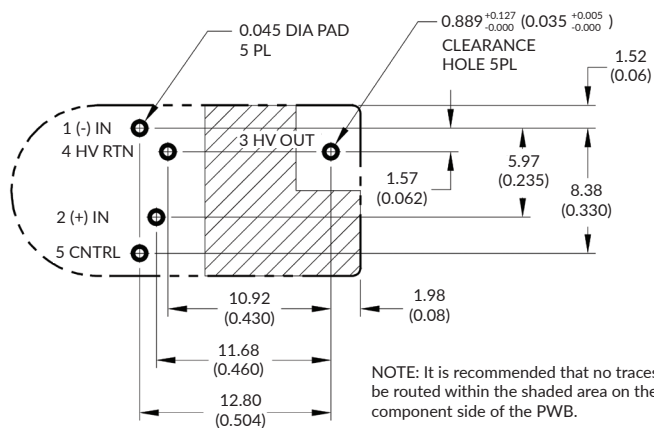

Notes:

1. All dimensions are in mm (inches)
2. Weight 5.66g (<0.2oz)

3. Tolerance: X.XX±0.51 (0.02)
4. Pin Tolerance: ±0.127 (0.005)

6000V

Technical drawing of the front view of the device. The drawing shows a rectangular plate with a rounded right end. Dimensions are provided in inches and millimeters (in parentheses). The overall height is 11.43 (0.45) inches. The overall width is 33.78 (1.33) inches. The plate is labeled "BLACK ANODIZED ALUMINUM PLATE". The front view shows a "MFG CODE" of "1XXXXXX" and a "EPOXY 94V-0 COMPLIANT" label. The plate is mounted on a base with "0.64 (0.025) DIA PINS 5 PLACES". The mounting pins are 5.08 (0.20) inches high. The plate is 6.35 (0.25) inches thick.

Top view of the HV module showing dimensions and pin locations. The module is rectangular with a rounded right side. Dimensions are given in inches (mm) in parentheses. Pin locations are indicated by circles with numbers and labels.

Dimensions:

- Overall width: 23.32 (0.918)
- Overall height: 8.38 (0.330)
- Distance from left edge to center of pin 3: 1.98 (0.08)
- Distance from left edge to center of pin 1: 5.97 (0.235)
- Distance from left edge to center of pin 2: 1.57 (0.062)
- Distance from left edge to center of pin 4: 21.44 (0.844)
- Distance from left edge to center of pin 5: 22.20 (0.874)
- Distance from center of pin 1 to center of pin 4: 23.32 (0.918)
- Distance from center of pin 4 to right edge: 1.52 (0.06)
- Radius of the rounded right side: R 5.72 (0.225)

Pin locations:

- Pin 1 (-) IN
- Pin 2 (+) IN
- Pin 3 HV OUT
- Pin 4 HV RTN
- Pin 5 CNTRL

0.045 DIA PAD
5 PL

1 (-) IN
4 HV RTN

2 (+) IN
5 CNTRL

3 HV OUT

CLEARANCE HOLE 5PL

1.52
(0.06)

1.57
(0.062)

5.97
(0.235)

8.38
(0.330)

21.44
(0.844)

22.20
(0.874)

23.32
(0.918)

1.98
(0.08)

0.889^{+0.127}_{-0.000} (0.035^{+0.005}_{-0.000})

NOTE: It is recommended that no traces be routed within the shaded area on the component side of the PWB.


1. All dimensions are in mm (inches)
2. Weight 8.49g (<0.3oz)

3. Tolerance: $X.XX \pm 0.51$ (0.02)
4. Pin Tolerance: ± 0.127 (0.005)

Application Notes

Typical HV Output vs. Control Voltage

For proportional operation, tie the control pin to the input voltage, or use separately for control as shown below. Do not leave floating.

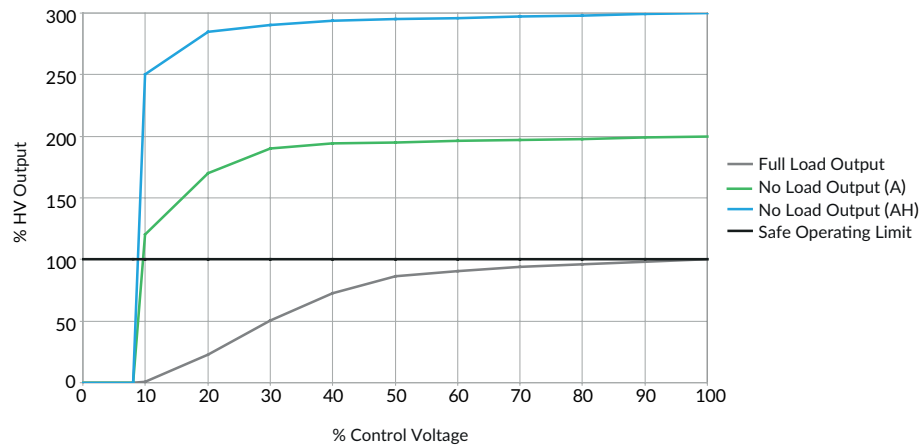

Typical Output vs. Input Voltage

