


CUI INC

a bel group

date 07/23/2024

page 1 of 8

SERIES: PES1-M | DESCRIPTION: DC-DC CONVERTER

FEATURES

- 1 W isolated output
- smaller package
- single/dual unregulated outputs
- 3,000 Vdc isolation
- short circuit protection
- extended temperature range (-40~105°C)
- antistatic protection up to 8kV
- high efficiency at light load
- efficiency up to 82%
- designed to meet EN/BS EN 62368-1



MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple and noise ² typ (mVp-p)	efficiency typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
PES1-S3-S3-M ³	3.3	2.97~3.63	3.3	30	303	1	60	69
PES1-S3-S5-M ^{1,3,4}	3.3	2.97~3.63	5	20	200	1	60	74
PES1-S5-S3-M ^{1,3,4}	5	4.5~5.5	3.3	30	303	1	60	72
PES1-S5-S5-M ^{1,3,4}	5	4.5~5.5	5	20	200	1	60	80
PES1-S5-S9-M ^{1,3,4}	5	4.5~5.5	9	12	111	1	60	80
PES1-S5-S12-M ^{1,3,4}	5	4.5~5.5	12	9	84	1	60	80
PES1-S5-S15-M ^{1,3,4}	5	4.5~5.5	15	7	67	1	60	80
PES1-S5-S24-M ^{1,3,4}	5	4.5~5.5	24	4	42	1	60	80
PES1-S5-D5-M ^{3,4}	5	4.5~5.5	±5	±10	±100	1	60	80
PES1-S5-D9-M ^{3,4}	5	4.5~5.5	±9	±6	±56	1	60	80
PES1-S5-D12-M ^{3,4}	5	4.5~5.5	±12	±5	±42	1	60	79
PES1-S5-D15-M ^{3,4}	5	4.5~5.5	±15	±3	±33	1	60	81
PES1-S5-D24-M ^{3,4}	5	4.5~5.5	±24	±2	±21	1	60	81
PES1-S12-S3-M ^{1,3,4}	12	10.8~13.2	3.3	30	303	1	60	72
PES1-S12-S5-M ^{1,3,4}	12	10.8~13.2	5	20	200	1	60	71
PES1-S12-S9-M ^{1,3,4}	12	10.8~13.2	9	12	111	1	60	80
PES1-S12-S12-M ^{1,3,4}	12	10.8~13.2	12	9	84	1	60	80
PES1-S12-S15-M ^{1,3,4}	12	10.8~13.2	15	7	67	1	60	80
PES1-S12-D5-M ^{3,4}	12	10.8~13.2	±5	±10	±100	1	60	80
PES1-S12-D9-M ^{3,4}	12	10.8~13.2	±9	±6	±56	1	60	80
PES1-S12-D12-M ^{3,4}	12	10.8~13.2	±12	±5	±42	1	60	73
PES1-S12-D15-M ^{3,4}	12	10.8~13.2	±15	±3	±33	1	60	81
PES1-S12-D24-M ^{3,4}	12	10.8~13.2	±24	±2	±21	1	60	81
PES1-S15-S15-M ³	15	13.5~16.5	15	7	67	1	60	80
PES1-S24-S5-M ^{1,3,4}	24	21.6~26.4	5	20	200	1	60	73
PES1-S24-S9-M ^{1,3,4}	24	21.6~26.4	9	12	111	1	60	80
PES1-S24-S15-M ^{1,3,4}	24	21.6~26.4	15	7	67	1	60	72

- Notes:
1. UL approved
 2. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 µF ceramic and 10 µF electrolytic capacitors on the output.
 3. Standard option discontinued.
 4. Tape and Reel option discontinued.

Notes:

1. UL approved
2. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 μ F ceramic and 10 μ F electrolytic capacitors on the output.
3. Standard option discontinued.
4. Tape and Reel option discontinued.

PES1 - SXX - XXX - M - X

```
graph TD; A["PES1 - SXX - XXX - M - X"] --- B["Base Number"]; A --- C["Input Voltage"]; A --- D["Output  
S = single  
D = dual"]; A --- E["Output Voltage"]; A --- F["Packaging Style  
\"blank\" = tube  
TR = tape & reel"]
```

Base Number

Input Voltage

Output
S = single
D = dual

Output Voltage

Packaging Style
"blank" = tube
TR = tape & reel

parameter	conditions/description	min	typ	max	units
operating input voltage	3.3 Vdc input models	2.97	3.3	3.63	Vdc
	5 Vdc input models	4.5	5	5.5	Vdc
	12 Vdc input models	10.8	12	13.2	Vdc
	15 Vdc input models	13.5	15	16.5	Vdc
	24 Vdc input models	21.6	24	26.4	Vdc
surge voltage	for maximum of 1 second				
	3.3 Vdc input models	-0.7		5	Vdc
	5 Vdc input models	-0.7		9	Vdc
	12 Vdc input models	-0.7		18	Vdc
	15 Vdc input models	-0.7		21	Vdc
	24 Vdc input models	-0.7		30	Vdc
filter	capacitance filter				

parameter	conditions/description	min	typ	max	units
line regulation	for Vin change of 1%				
	3.3 Vdc output models			±1.5	%
	all other models			±1.2	%
load regulation	measured from 10% load to full load				
	3.3 Vdc output models		18		%
	5 Vdc output models		12		%
	9 Vdc output models		9		%
	12 Vdc output models		8		%
	15 Vdc output models		7		%
	24 Vdc output models		6		%
voltage accuracy	see tolerance envelope curve				
switching frequency	100% load, nominal input voltage		100		kHz
temperature coefficient	100% load			±0.03	%/°C

PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	PES1-S5-S24-M, PES1-S5-D24-M and all 24 V input models ¹ all other models: continuous, automatic recovery			1	s

Note: 1. If maximum protection time is exceeded input power must be cycled to restart device.

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute at 1 mA max.	3,000			Vdc
isolation resistance	input to output at 500 Vdc	1,000			MΩ
safety approvals ²	certified to 60950-1: UL designed to meet 62368: EN/BS EN				
conducted emissions	CISPR22/EN55022 class B (external circuit required, see Figure 1)				
radiated emissions	CISPR22/EN55022 class B (external circuit required, see Figure 1)				
ESD	IEC/EN61000-4-2, class B, contact ± 8kV for single outputs IEC/EN61000-4-2, class B, contact ± 6kV for dual outputs				
MTBF	as per MIL-HDBK-217F @ 25°C	3,500,000			hours
RoHS	2011/65/EU				

Note: 2. See specific models noted on page 1 & 2.

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		105	°C
storage temperature		-55		125	°C
storage humidity	non-condensing			95	%
temperature rise	at full load, Ta = 25°C		25		°C

SOLDERABILITY³

parameter	conditions/description	min	typ	max	units
reflow soldering	maximum duration time ≤60 s at 217°C			245	°C

Note: 3. Please refer to IPC/JEDEC J-STD-020D.1 for additional information.

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	single output models: 12.70 x 8.30 x 7.25 dual output models: 15.24 x 8.30 x 7.25				mm mm
case material	epoxy resin (UL94-V0)				
weight	single output models dual output models		1.6 2.0		g g

MECHANICAL DRAWING


SINGLE OUTPUT MODELS

units: mm[inch]



tolerance: ± 0.25 [± 0.010]pin section tolerance: ± 0.10 [± 0.004]

PIN CONNECTIONS	
PIN	Function
1	GND
2	Vin
4	0V
5	+Vo
8	NC


NC: No Connection

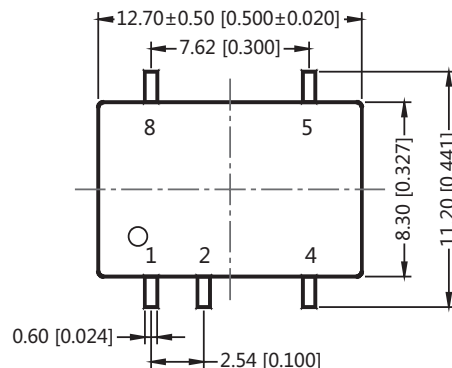


Top View



Front View



Right View

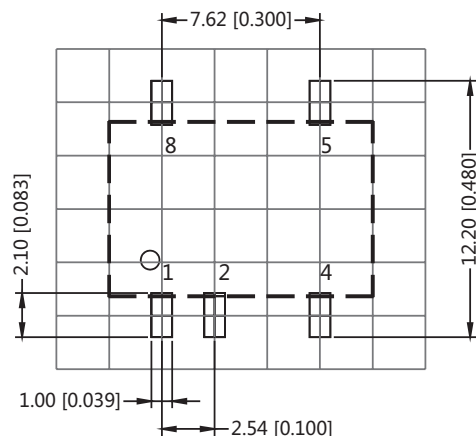

Note: Grid 2.54*2.54mm

Top View

MECHANICAL DRAWING (CONTINUED)


DUAL OUTPUT MODELS

units: mm[inch]


tolerance: $\pm 0.25[\pm 0.010]$ pin section tolerance: $\pm 0.10[\pm 0.004]$

PIN CONNECTIONS	
PIN	Function
1	GND
2	V _{in}
4	0V
5	-V _o
7	+V _o
10	NC


NC: No Connection

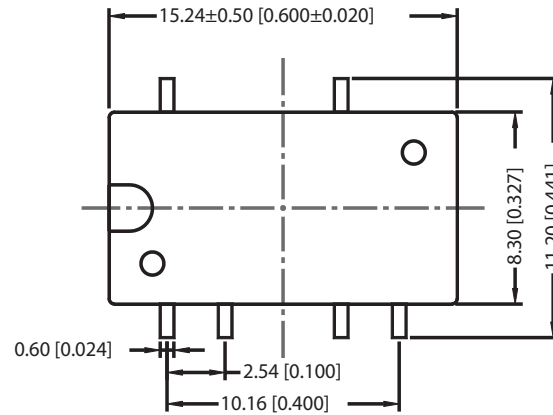


Top View

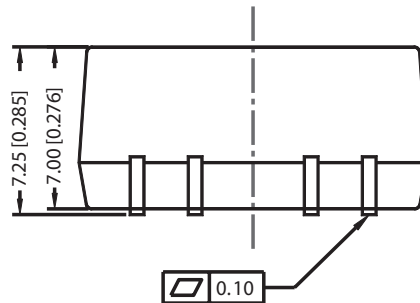

Front View



Right View

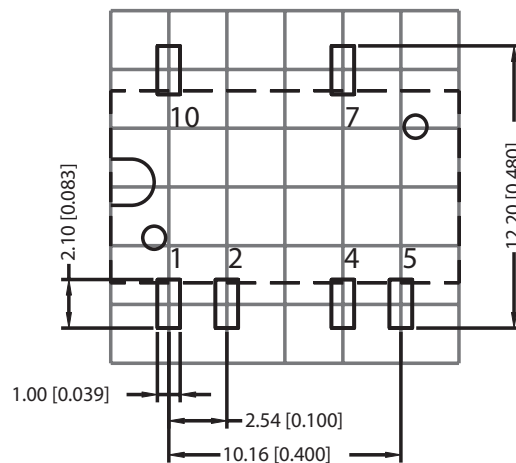


Note : Grid 2.54*2.54mm


Top View

DERATING CURVES


OUTPUT REGULATION CURVE
3.3 Vdc output model
(nominal input)

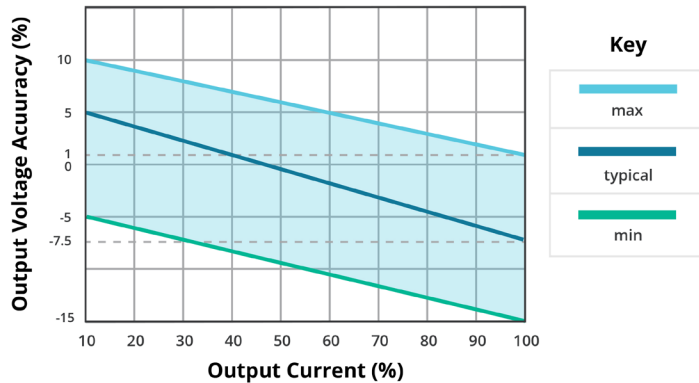

OUTPUT REGULATION CURVE
all other output models
(nominal input)

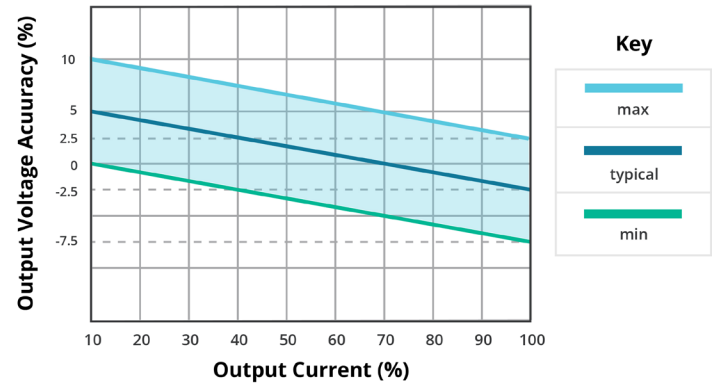


TEMPERATURE DERATING CURVE

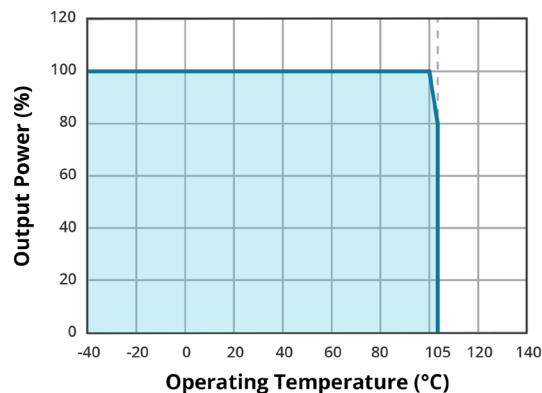


EMC RECOMMENDED CIRCUIT

Figure 1

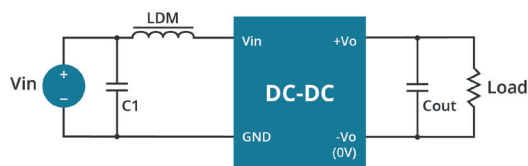

Single Outputs

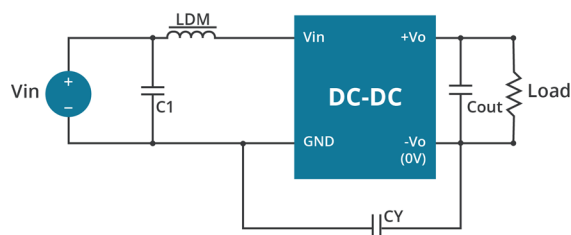

Dual Outputs

Table 1

Recommended external circuit components		
Vin (Vdc)	C1	LDM
3.3	4.7μF/50V	6.8μH
5	4.7μF/50V	6.8μH
12	4.7μF/50V	6.8μH
15	4.7μF/50V	6.8μH
24	4.7μF/50V	6.8μH

Note: 1. See Table 2 for Cout values.
2. CY: 1nF/3kV for 24 Vdc input dual output models, PES1-S5-D24-M, and PES1-S12-D24-M only

APPLICATION NOTES

1. Output load requirement

To ensure this module can operate efficiently and reliably, the minimum output load may not be less than 10% of the full load during operation. If the actual output power is low, connect a resistor at the output end in parallel to increase the load.

2. Overload Protection

Under normal operating conditions, the output circuit of this product has no protection against overload. The simplest method to add this is to add a circuit breaker to the circuit.

3. Recommended circuit

If you want to further decrease the input/output ripple, you can increase the capacitance accordingly or choose capacitors with low ESR(see Figure 2 & Table 2). However, the capacitance of the output filter capacitor must be appropriate. If the capacitance is too high, a startup problem might arise. For every channel of the output, to ensure safe and reliable operation, the maximum capacitance must be less than the maximum capacitive load (see Table 3).

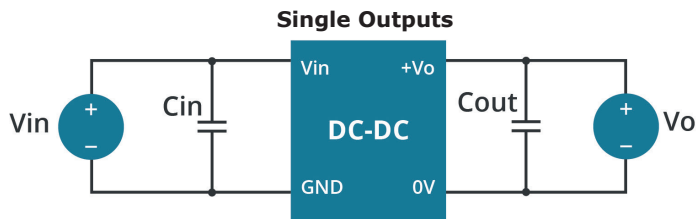


Figure 2

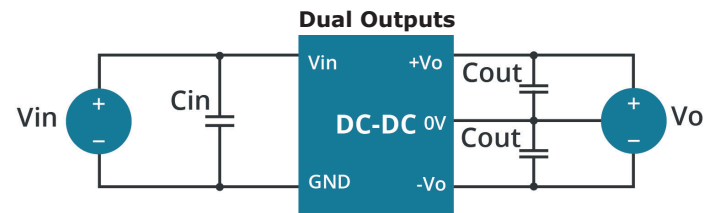


Table 2

Vin (Vdc)	Cin (μF)	Single Vo (Vdc)	Cout (μF)	Dual Vo (Vdc)	Cout (μF)
3.3	4.7	3.3	10	--	--
5	4.7	5	10	±5	4.7
--	--	9	4.7	±9	2.2
12	2.2	12	2.2	±12	1
15	2.2	15	1	±15	1
24	1	24	0.47	±24	0.47

Table 3

Single Vout (Vdc)	Max. Capacitive Load (μF)	Dual Vout (Vdc)	Max. Capacitive Load ¹ (μF)
3.3	220	--	--
5	220	5	100
9	220	9	100
12	220	12	100
15	220	15	100
24	220	24	100

Note: 1. For each output.

Note: 1. Operation under minimum load will not damage the converter; however, they may not meet all specifications listed.

2. Max. capacitive load tested at input voltage range and full load.

3. It is recommended to use either ceramic capacitors or electrolytic capacitors on the input and the output. Using tantalum capacitors may increase the risk of failure.

4. All specifications measured at: Ta=25°C, humidity<75%, nominal input voltage and rated output load, unless otherwise specified.

REVISION HISTORY

rev.	description	date
1.0	initial release	03/19/2013
1.01	added models, updated spec	04/04/2014
1.02	added UL approval to some models	10/21/2014
1.03	updated tolerance envelope curves	06/26/2015
1.04	safeties updated in features and safety approvals line	01/18/2021
1.05	derating curves and circuit figures updated, short circuit protection note updated	08/11/2021
1.06	efficiency updated for PES1-S12-S5-M, PES1-S24-S5-M, PES1-S24-S15-M, PES1-S12-D12-M, PES1-S24-D5-M, PES1-S24-D12-M & PES1-S24-D15-M	08/09/2022
1.07	CE certification removed	11/11/2022
1.08	discontinued model PES1-S5-D12-M, PES1-S5-D15-M, PES1-S5-D24-M, PES1-S5-D5-M, PES1-S5-D9-M	12/14/2022
1.09	soldering updated	09/12/2023
1.10	discontinued models PES1-S12-D12-M, PES1-S12-D15-M, PES1-S12-D24-M, PES1-S12-D5-M, PES1-S12-D9-M, PES1-S12-S15-M, PES1-S15-S15-M-TR, PES1-S24-D12-M, PES1-S24-D15-M, PES1-S24-D24-M, PES1-S24-D5-M, PES1-S24-D9-M, PES1-S24-S9-M & PES1-S3-S5-M	09/26/2023
1.11	discontinued models PES1-S12-D12-M-TR, PES1-S12-D15-M-TR, PES1-S12-D24-M-TR, PES1-S12-D5-M-TR, PES1-S12-D9-M-TR, PES1-S12-S12-M, PES1-S12-S15-M-TR, PES1-S12-S3-M, PES1-S12-S5-M, PES1-S12-S5-M-TR, PES1-S12-S9-M, PES1-S12-S9-M-TR, PES1-S15-S15-M, PES1-S24-D12-M-TR, PES1-S24-D15-M-TR, PES1-S24-D24-M-TR, PES1-S24-D5-M-TR, PES1-S24-D9-M-TR, PES1-S24-S15-M, PES1-S24-S15-M-TR, PES1-S24-S24-M, PES1-S24-S24-M-TR, PES1-S24-S5-M, PES1-S24-S9-M-TR, PES1-S3-S3-M, PES1-S3-S5-M-TR, PES1-S5-S12-M, PES1-S5-S15-M, PES1-S5-S24-M, PES1-S5-S24-M-TR, PES1-S5-S3-M, PES1-S5-S5-M & PES1-S5-S9-M	1/15/2024
1.12	discontinued models PES1-S12-S3-M-TR, PES1-S24-S5-M-TR, PES1-S5-S12-M-TR, PES1-S5-S15-M-TR, PES1-S5-S3-M-TR, PES1-S5-S5-M-TR & PES1-S5-S9-M-TR	04/09/2024
1.13	discontinued models PES1-S12-S12-M-TR	07/23/2024

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC
a bel group

Headquarters

15575 SW Sequoia Pkwy #100
Portland, OR 97224
800.275.4899

Fax 503.612.2383

cui.com

techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.