


**CUI INC**

a bel group


date 11/20/2024

page 1 of 4

## SERIES: VAWQ6 | DESCRIPTION: DC-DC CONVERTER

### FEATURES

- up to 6 W isolated output
- wide input (4:1)
- industry standard 24 pin DIP package style
- single and dual regulated outputs
- 3,000 Vdc isolation
- short circuit protection
- wide temperature range -25 ~ 95°C with derating
- efficiency up to 80%

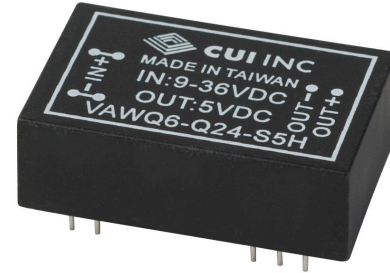


### MODEL

| MODEL           | input voltage |                | output voltage<br>(Vdc) | output current<br>max<br>(mA) | output power<br>max<br>(W) | ripple and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br>typ<br>(%) |
|-----------------|---------------|----------------|-------------------------|-------------------------------|----------------------------|-------------------------------------------------|--------------------------|
|                 | typ<br>(Vdc)  | range<br>(Vdc) |                         |                               |                            |                                                 |                          |
| VAWQ6-Q24-S3R3H | 24            | 9~36           | 3.3                     | 1,000                         | 3.3                        | 100                                             | 72                       |
| VAWQ6-Q24-S5H   | 24            | 9~36           | 5                       | 1,000                         | 5                          | 100                                             | 78                       |
| VAWQ6-Q24-S12H  | 24            | 9~36           | 12                      | 470                           | 5.64                       | 120                                             | 80                       |
| VAWQ6-Q24-S15H  | 24            | 9~36           | 15                      | 400                           | 6                          | 150                                             | 80                       |
| VAWQ6-Q24-D5H   | 24            | 9~36           | ±5                      | ±500                          | 5                          | 100                                             | 78                       |
| VAWQ6-Q24-D12H  | 24            | 9~36           | ±12                     | ±230                          | 5.52                       | 120                                             | 80                       |
| VAWQ6-Q24-D15H  | 24            | 9~36           | ±15                     | ±190                          | 5.7                        | 150                                             | 80                       |
| VAWQ6-Q48-S3R3H | 48            | 18~72          | 3.3                     | 1,000                         | 3.3                        | 100                                             | 70                       |
| VAWQ6-Q48-S5H   | 48            | 18~72          | 5                       | 1,000                         | 5                          | 100                                             | 78                       |
| VAWQ6-Q48-S12H  | 48            | 18~72          | 12                      | 470                           | 5.64                       | 120                                             | 79                       |
| VAWQ6-Q48-S15H  | 48            | 18~72          | 15                      | 400                           | 6                          | 150                                             | 80                       |
| VAWQ6-Q48-D5H   | 48            | 18~72          | ±5                      | ±500                          | 5                          | 100                                             | 77                       |
| VAWQ6-Q48-D12H  | 48            | 18~72          | ±12                     | ±230                          | 5.52                       | 120                                             | 79                       |
| VAWQ6-Q48-D15H  | 48            | 18~72          | ±15                     | ±190                          | 5.7                        | 150                                             | 80                       |

Notes: 1. ripple and noise are measured at 20 MHz BW with 10μF tantalum capacitor and 1μF ceramic capacitor across output

### PART NUMBER KEY

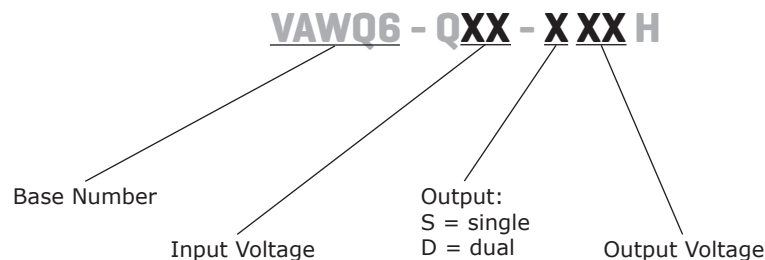

INPUT

| parameter               | conditions/description | min | typ | max | units |
|-------------------------|------------------------|-----|-----|-----|-------|
| operating input voltage | 24 Vdc models          | 9   | 24  | 36  | Vdc   |
|                         | 48 Vdc models          | 18  | 48  | 72  | Vdc   |
| input filter            | PI type                |     |     |     |       |

OUTPUT

| parameter               | conditions/description              | min | typ | max   | units |
|-------------------------|-------------------------------------|-----|-----|-------|-------|
| line regulation         | measured from low line to high line |     |     | ±0.5  | %     |
| load regulation         | single output models <sup>1</sup>   |     |     | ±0.5  | %     |
|                         | dual output models <sup>2</sup>     |     |     | ±1.0  | %     |
| voltage accuracy        |                                     |     |     | ±2.0  | %     |
| voltage balance         | dual output models                  |     |     | ±1.0  | %     |
| switching frequency     |                                     | 200 |     |       | kHz   |
| temperature coefficient |                                     |     |     | ±0.05 | %/°C  |

Notes: 1. measured from 10% to 100% full load  
2. measured from 25% to 100% full load

PROTECTIONS

| parameter                | conditions/description | min | typ | max | units |
|--------------------------|------------------------|-----|-----|-----|-------|
| short circuit protection | continuous             |     |     |     |       |


SAFETY AND COMPLIANCE

| parameter             | conditions/description | min   | typ | max | units |
|-----------------------|------------------------|-------|-----|-----|-------|
| isolation voltage     |                        | 3,000 |     |     | Vdc   |
| insulation resistance |                        | 1,000 |     |     | MΩ    |
| RoHS                  | 2011/65/EU             |       |     |     |       |

ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | -25 |     | 95  | °C    |
| storage temperature   |                        | -40 |     | 100 | °C    |

DERATING CURVES

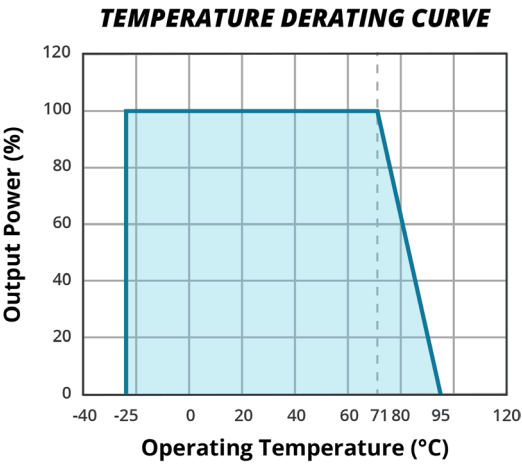


MECHANICAL

| parameter     | conditions/description                         | min | typ  | max | units |
|---------------|------------------------------------------------|-----|------|-----|-------|
| dimensions    | 31.8 x 20.3 x 10.2 (1.25 x 0.80 x 0.40 inches) |     |      |     | mm    |
| case material | non-conductive black plastic                   |     |      |     |       |
| weight        |                                                |     | 12.5 |     | g     |

MECHANICAL DRAWING

units: mm [inches]  
tolerance: inches: x.xx = ±0.02, x.xxx = ±0.010  
mm: x.xx = ±0.5, x.xxx = ±0.25  
Note: pin diameter: 0.5 mm [0.02"]

| PIN CONNECTIONS |               |             |
|-----------------|---------------|-------------|
|                 | SINGLE OUTPUT | DUAL OUTPUT |
| PIN             | FUNCTION      | FUNCTION    |
| 1,24            | NP            | NP          |
| 2,3             | -Vin          | -Vin        |
| 4,5             | NP            | NP          |
| 9               | NC            | Common      |
| 10,15           | NC            | NC          |
| 11              | NC            | -Vo         |
| 12,13           | NP            | NP          |
| 14              | +Vo           | +Vo         |
| 16              | -Vo           | Common      |
| 20,21           | NP            | NP          |
| 22,23           | +Vin          | +Vin        |

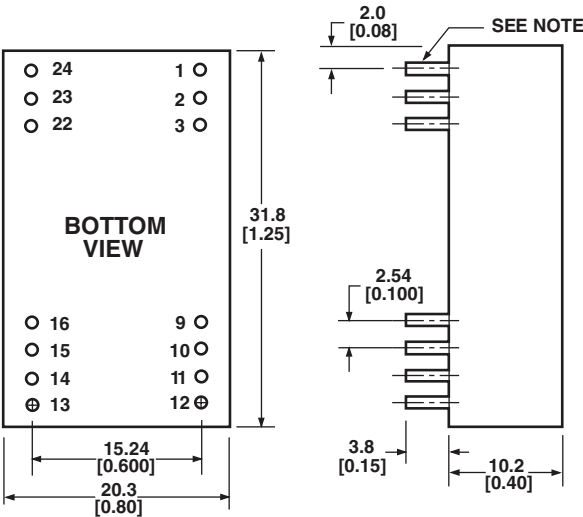

NP = No Pin  
NC = No connection

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

## REVISION HISTORY

| rev. | description                 | date       |
|------|-----------------------------|------------|
| 1.0  | initial release             | 10/13/2008 |
| 1.01 | updated information         | 04/09/2009 |
| 1.02 | updated to new template     | 08/22/2011 |
| 1.03 | V-Infinity branding removed | 09/11/2011 |
| 1.04 | updated spec                | 03/12/2013 |
| 1.05 | updated spec                | 05/12/2015 |
| 1.06 | company logo updated        | 02/16/2021 |
| 1.07 | company address updated     | 11/05/2024 |
| 1.07 | maximum temperature updated | 11/20/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**  
a bel group

**Headquarters**

15575 SW Sequoia Pkwy #100  
Portland, OR 97224  
**800.275.4899**

Fax 503.612.2383

**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.