


PART NUMBER: VSCQ20 series**DESCRIPTION:** DC/DC converter**features**

- 20W isolated output
- efficiency to 84%
- 4:1 input range
- continuous short circuit protection
- remote on/off control
- Pi input filter

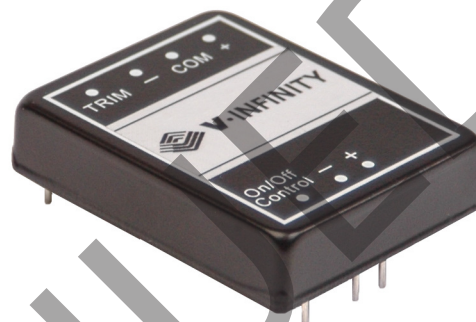

model number	input voltage	output voltage	output current	input current		efficiency
				no load	full load	
VSCQ20-Q24-S5	9-36VDC	5VDC	4000mA	15mA	1029mA	81%
VSCQ20-Q24-S12	9-36VDC	12VDC	1670mA	15mA	1006mA	83%
VSCQ20-Q24-S15	9-36VDC	15VDC	1330mA	15mA	1004mA	83%
VSCQ20-Q24-D12	9-36VDC	±12VDC	±833mA	20mA	1004mA	83%
VSCQ20-Q24-D15	9-36VDC	±15VDC	±666mA	20mA	1004mA	83%
VSCQ20-Q24-D5	9-36VDC	±5VDC	±2000mA	20mA	1004mA	83%
VSCQ20-Q24-S3R3	9-36VDC	3.3VDC	4000mA	15mA	705mA	78%
VSCQ20-Q48-S5	18-72VDC	5VDC	4000mA	10mA	508mA	82%
VSCQ20-Q48-S12	18-72VDC	12VDC	1670mA	10mA	497mA	84%
VSCQ20-Q48-S15	18-72VDC	15VDC	1330mA	10mA	496mA	84%
VSCQ20-Q48-D12	18-72VDC	±12VDC	±833mA	15mA	496mA	84%
VSCQ20-Q48-D15	18-72VDC	±15VDC	±666mA	15mA	496mA	84%
VSCQ20-Q48-D5	18-72VDC	±5VDC	±2000mA	15mA	496mA	84%
VSCQ20-Q48-S3R3	18-72VDC	3.3VDC	4000mA	10mA	353mA	78%

**PART NUMBER:** VSCQ20 series**DESCRIPTION:** DC/DC converter**INPUT**

input voltage range	24V	9-36V
	48V	18-72V
input filter type		PI type
positive logic remote on/off control		see note 3

OUTPUT

voltage accuracy single output		±1.0% max.
voltage accuracy dual+output		±1.0% max.
voltage accuracy dual-output		±2.0% max.
voltage balance, dual output at full load		±1.0% max.
transient response		
	single 25% step load change	<500μ sec.
	dual-FL 1/2L±1% error band	<500μ sec.
ripple & noise	20MHz BW,	20mV RMS., max
		75mV p-p, max
temperature coefficient		±0.02%/°C
short circuit protection		continuous
Safety		approved to UL60950-1 (E222736)
line regulation ¹	single/dual output	±0.5% max
load regulation ²	single/dual output	±0.5% max

GENERAL SPECIFICATIONS

efficiency		see table
isolation voltage		1500VDC min.
isolation resistance		10 ⁸ ohms min
switching frequency		300KHz, type
operating temperature range		-25°C to +71°C
derating, above 60°C		linearly to zero power at +100°C
case temperature		100°C max.
storage temperature		-55°C to +105°C
EMI/RFI		six sided continuous shield
dimensions		2.0x1.6x0.45 inches
		(50.8x40.64x11.43mm)
case material		black coated copper with non-conductive base

NOTES:

1. measured from high line to low line

2. measured from full load to 1/4 load

3. remote on/off control:

logic compatibility CMOS or open collector TTL

EC-ON

>+5.5VDC or open circuit

EC-OFF


<1.8VDC

control common

referenced to input minus

DESCRIPTION: DC/DC converter

All Dimensions In Inches(mm)
Tolerance .xx= $\pm .04$, .xxx= $\pm .010$



Output may optionally be externally trimmed ($\pm 10\%$) with a fixed resistor or an external trimpot as shown.

