



Modicon Managed Switch - 4 ports for copper + 2 ports for fiber optic single-mode

MCSESM063F2CS0

Main

Range of product	Modicon		
Product or component type	Ethernet TCP/IP managed switch		
Concept	Transparent Ready		
Communication port protocol	Ethernet TCP/IP SSH HTTP HTTPS SNMP RS232 SFTP SCP LLDP Telnet SNTP		
Port Ethernet	100BASE-FX - 2 port(s) fiber optic 10/100BASE-TX - 4 port(s) copper cable		
Maximum number of switches in cascade	Unlimited		
Cybersecurity	Port hardening IP-based port security MAC-based port security Port-based access control Role-based access control RADIUS assignment HTTPS DoS prevention VLAN-based ACL Audit trail SNMP logging Pre-login banner		

Complementary

Integrated connection type	Duplex SC fiber optic Shielded RJ45 copper cable	
Transmission support medium	Single mode optical fiber for fiber optic Twisted shielded pairs cable CAT 5E for copper cable	
Maximum cable distance between devices	100 m copper cable	
Optic fiber length	32.5 km 9/125 μm	
Attenuation	016 dB (9/125 μm)	
Ethernet service	Configuration via web server VLAN Multicast filtering Data stream control IGMP Snooping SNMP-Traps and SYSLOG	

communication service	TFTP			
communication convice	Quality of Service (QoS)			
	Port monitoring			
	Port mirroring			
	Address conflict detection			
Diagnostics run time	Signal contact			
	Self test			
	MAC notification			
Maximum number of switches in a ring	a 50			
Redundancy	HiPER ring			
	RSTP			
	Link aggregation Link backup			
	Redundant network coupling			
	MRP			
[Us] rated supply voltage	1224 V			
Supply voltage limits	9.632 V DC SELV			
Power consumption in W	7 W			
Electrical connection	Removable connector 6 ways power supply			
mounting support	35 mm symmetrical DIN rail			
marking	CE			
	CULus			
	RCM			
Function available	Security status			
	Alarms (Traps)			
	System information			
	Report			
Local signalling	1 dual colour LED (green/yellow) for P1 P2 power supplies			
	1 dual colour LED (green/red) for device status			
	1 dual colour LED (green/yellow) for memory key status			
	1 dual colour LED (green/yellow) for channel diagnostic			
Alarm output	1 voltfree contact 1 A			
Alarm function	Power supply fault			
	Data link status			
	Switch fault Temperature threshold			
	Redundancy ring fault			
	Incorrect configuration			
	External memory removed			
Ethernet cabling system	TF switches			
Width	57 mm			
Height	142.8 mm			
Depth	117.6 mm			
Net weight	0.42 kg			
Environment				
Ambient air temperature for operation	060 °C			
Relative humidity	195 % non-condensing			
IP degree of protection	IP30			
Directives	2014/35/EU - low voltage directive			
	2014/30/EU - electromagnetic compatibility			
Standards	UL 61010-2-201			
	EN/IEC 61131-2			
	EN/IEC 62368-1			

Product certifications	CE		
	UL		
	RCM		
	DNV		
	ATEX		

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16 cm
Package 1 Width	6 cm
Package 1 Length	24 cm
Package 1 Weight	546 g
Unit Type of Package 2	S04
Number of Units in Package 2	20
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	11.478 kg

Contractual warranty

Warranty 18 months

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

19 Sept 2024

Dimensions Drawings

Dimensions

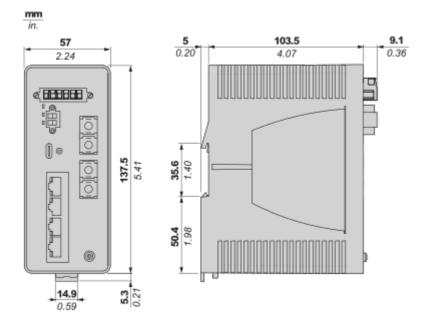


Image of product / Alternate images

Alternative











