




0055257A2

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

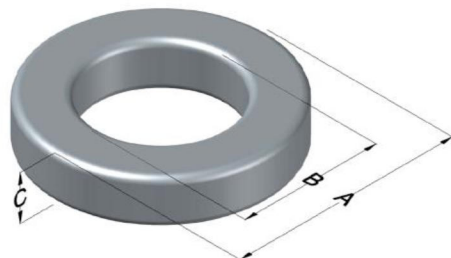

MPP Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
14	19 $\pm$ 8%	XXXXXX	55257A2	N/A	Gray

Dimensions	Uncoated		Coated Limits			Packaging Cardboard cut-outs Box Qty= 180 pcs
	(mm)	(in)	(mm)	(in)		
OD (A)	39.88	1.570	40.77	1.605	max	
ID (B)	24.13	0.950	23.32	0.918	min	
HT (C)	14.48	0.570	15.37	0.605	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max(mW/cm³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm²)	Cross Section A _e (mm²)	Path Length L _e (mm)	Volume V _e (mm³)	Weight (g)
1600	80%	60%	3000	126	427	107	98.4	10,600	74
	215	270							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)		Curie Temp: 460 °C	
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	Coating Temp (Continuous up to): 200 °C	
					HT	Notes:	
0%	48.2	40%	60.2	Completely Full Window	Max OD		
20%	54.3	45%	62.1		Max HT		
25%	55.8	50%	63.7	Surface Area (mm ²)			
30%	57.0	60%	67.3				
35%	58.8	70%	71.5	Unwound Core	4,800		
				40% Winding Factor	7,300		

Typical DC Bias Performance

