




0077092A7

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

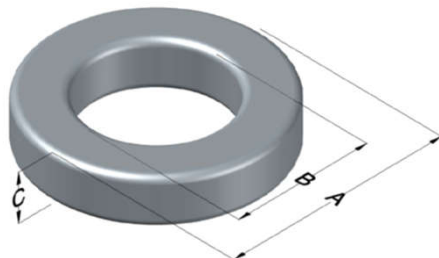

Kool Mμ Permeability (μ)	A _L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
14	20 ± 8%	XXXXXX	77092A7	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	46.74	1.840	47.63	1.875	max	Cardboard cut-outs Box Qty= 120 pcs
ID (B)	28.70	1.130	27.89	1.098	min	
HT (C)	15.24	0.600	16.13	0.635	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Est. Weight (g)
	80%	50%							
1200	175	350	3000	99.0	611	134	116.2	15,600	82.3

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	53.2	Coating Temp (Continuous up to): 200°C
					HT	24.5	
				Completely Full Window	Max OD	56.0	Notes:
					Max HT	35.7	
				0%	52.0	40%	
20%	59.3	45%	68.4				
25%	60.9	50%	70.3				
30%	62.6	60%	74.8	Unwound Core		6,200	
35%	64.6	70%	79.6	40% Winding Factor		9,500	

Typical DC Bias Performance

