




0077206A7HT14

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

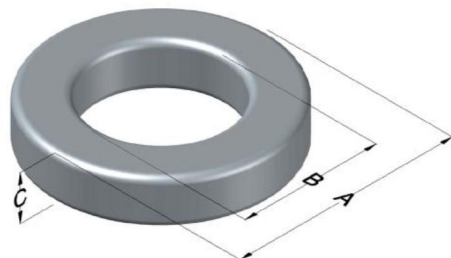

Kool Mμ Permeability (μ)	A _L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
125	136 ± 8%	XXXXXX	77206A7HT14	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	20.32	0.800	21.08	0.830	max	Bulk Pack 4 bags/box Box Qty= 800 pcs
ID (B)	12.7	0.500	12.07	0.475	min	
HT (C)	13.25	0.522	14.0	0.551	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max(mW/cm³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm²)	Cross Section A _e (mm²)	Path Length L _e (mm)	Volume V _e (mm³)	Weight (g)
750	80%	50%	>2000	29.0	114	44.2	50.9	2250	14
	13.5	35.0							

Winding Information					Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)		Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	22.9
					HT	16.7
				Completely Full Window	Max OD	29.2
					Max HT	23.4
0%	37.1	40%	43.1	Surface Area (mm ²)		
20%	40.0	45%	44.1			
25%	40.9	50%	44.9	Unwound Core		1,930
30%	41.6	60%	46.7	40% Winding Factor		2,680
35%	42.4	70%	48.8			

Coating Temp (Continuous up to):
200°C

Notes:

Typical DC Bias Performance

