




0077330A7

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

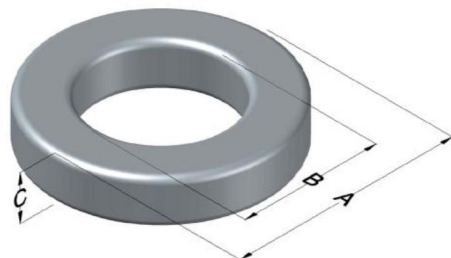

Kool Mμ Permeability (μ)	A _L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
40	37 ± 8%	XXXXXX	77330A7	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging Cardboard cut-outs Box Qty= 220 pcs
	(mm)	(in)	(mm)	(in)		
OD (A)	35.81	1.410	36.70	1.445	max	
ID (B)	22.35	0.880	21.54	0.848	min	
HT (C)	10.46	0.412	11.35	0.447	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max(mW/cm³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm²)	Cross Section A _e (mm²)	Path Length L _e (mm)	Volume V _e (mm³)	Weight (g)
900	80%	50%	3000	80	364	67.8	89.8	6,090	33.3
	58.5	133							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	40.2	Coating Temp (Continuous up to): 200°C
					HT	18.4	
				Completely Full Window	Max OD	51.1	Notes:
					Max HT	29.6	
0%	37.9	40%	48.9	Surface Area (mm²)			
20%	43.5	45%	50.6				
25%	44.8	50%	52.0				
30%	46.0	60%	55.5	Unwound Core		3,400	
35%	47.6	70%	59.3	40% Winding Factor		5,700	

Typical DC Bias Performance

