




0077866A7

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

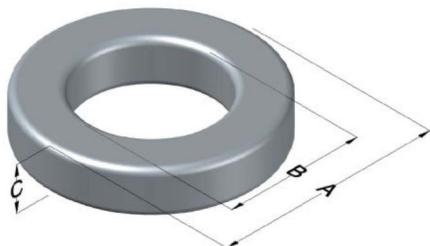

Kool Mμ Permeability (μ)	A _L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
125	142 ± 8%	XXXXXX	77866A7	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging Cardboard cut-outs Box Qty= 45 pcs
	(mm)	(in)	(mm)	(in)		
OD (A)	77.80	3.063	78.94	3.108	max	
ID (B)	49.23	1.938	48.21	1.898	min	
HT (C)	12.70	0.500	13.84	0.545	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
1000	80%	50%	3000	141.0	1,820	176	196	34,500	210
	14.0	35.0							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	86.6	Coating Temp (Continuous up to): 200°C
					HT	29.1	
				Completely Full Window	Max OD	112	Notes:
					Max HT	54.3	
0%	58.4	40%	83.5	Surface Area (mm²)			
20%	70.9	45%	86.7				
25%	74.1	50%	90.4				
30%	76.3	60%	98.1	Unwound Core		11,000	
35%	80.4	70%	107	40% Winding Factor		23,000	

Typical DC Bias Performance

