


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	9595494902	~

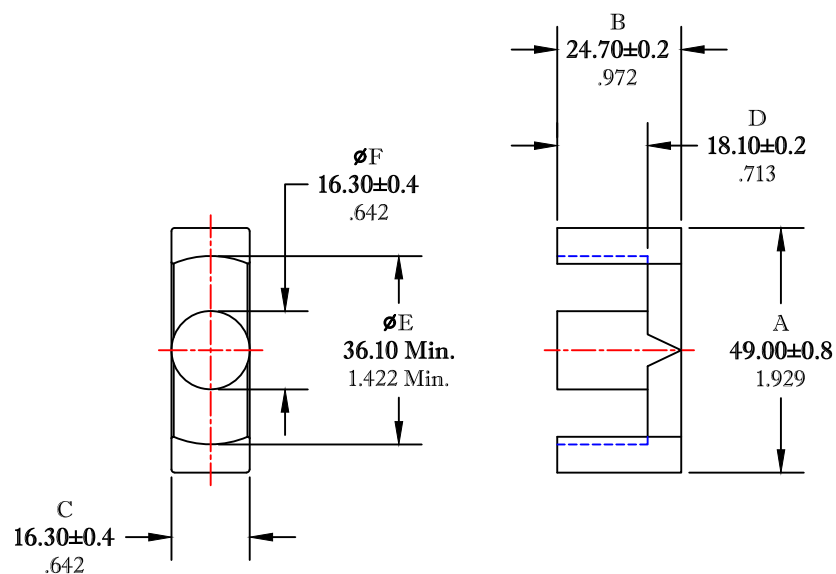

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS					
$\Sigma l/A(\text{mm}^{-1})$	$l_e(\text{mm})$	$A_e(\text{mm}^2)$	$V_e(\text{mm}^3)$	$A_{\text{MIN}}(\text{mm}^2)$	$A_L(\text{nH})$ @ 1 kHz <10gauss
.53	114.4	213.5	24420	209	5700±25%
MATE PAIR CLAMPING FORCE = 10 LBS.					

POWER LOSS @ 25°C
F = 100 kHz, 2000g. P.L. ≤ 13.7 WATTS

POWER LOSS @ 100°C
F = 100 kHz, 2000g. P.L. < 12.3 WATTS

FR# 95

FAIR-RITE PRODUCTS CORP.					
TITLE			ETD CORE		
DRAWN BY J.SERENCIS	DATE 07-13-2018	SIZE	PART NO.	REV.	
CHKD BY		B	9595494902	~	
APPRVD BY		SCALE	NONE	SHEET	1 of 1