


LODESTONE PACIFIC



Phone: (800) 694-8089
www.lodestonepacific.com
E-mail: sales@lodestonepacific.com

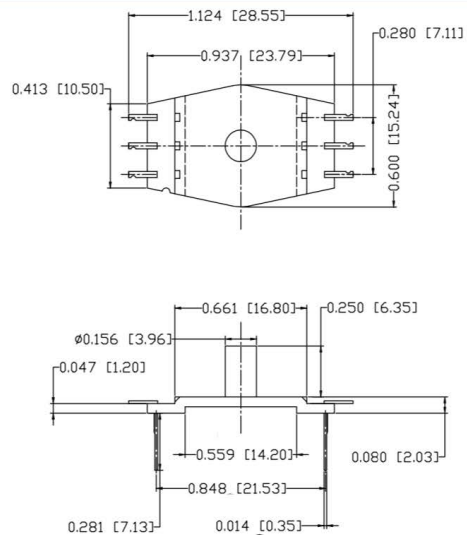

+/- .010 Inches
(mm) Actual Size



HTM601-6

Material: GFN (Natural)
UL Rating: UL94-VO, Class F
6 Terminals: Brass Nickel Flash
100% Tin Plated
Solderability: Per MIL-STD-202
Method 208
Package Method: Bulk in Polybags
Application: Low profile horizontal
mounting of wound toroids from .400 to
.850 inches in diameter. Each size is
available without a center post. MOQs
apply.

Made in our China Factory

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)