


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc; as per IEC standards

Effective parameters irrespective of material grade (per piece)

Approx. Weight (without gap)	65	g/pc.
------------------------------	----	-------

I10005

Material Grade	Initial Permeability (μ_{iac})	Ordering code
CF139	2100 $\pm$ 20%	CF139 I10005

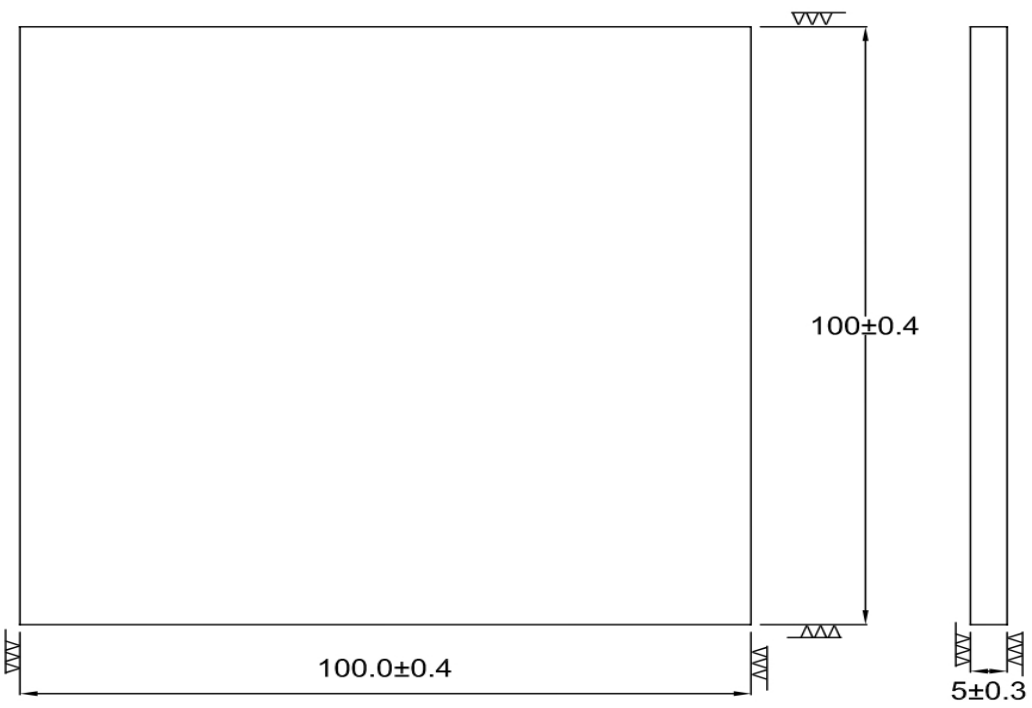

For general terms and conditions please visit

http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

E-mail: sales@cosmoferrites.com