


LODESTONE PACIFIC



Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

STM80HCC-04

Material: PPS (Black)
UL Rating: UL94-VO, Class F
4 Terminals: Self Terminating
Package Method: Bulk in Poly Bags
 See RoHS compliant PVC packaging trays, or tape and reel options on page 57.
Application: For self leading of surface mount high current coupled inductors and transformers using wound toroids up to .890 inches in diameter. The toroid's winding leads are used to make the surface mount connection to the PCB. This "Bigfoot" concept is the patented property of Pulse Engineering.

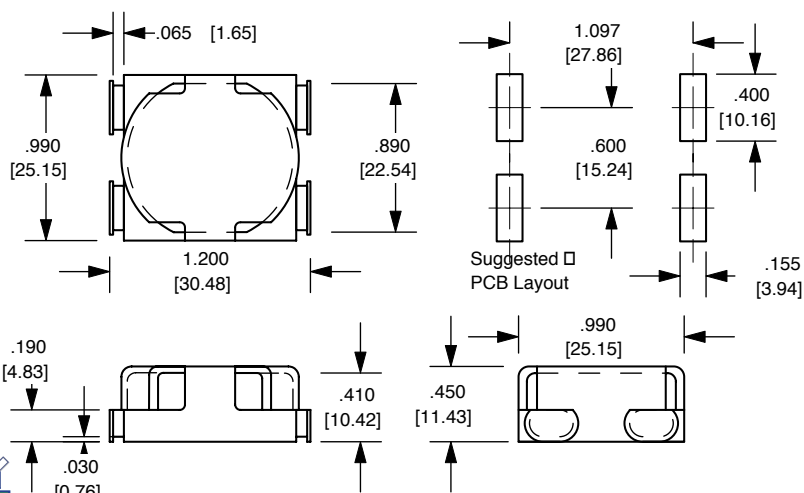

+/- .010 Inches
 (mm), Actual Size

Get Samples

Request samples and literature and have them ship to you same day.
www.lodestonepacific.com/samplepricing.php

Check Inventory

View daily updated inventory levels in USA and Hong Kong warehouses.
www.lodestonepacific.com/search.php

Request a Quote

Request a quote and delivery and have it e-mailed to you same day.
www.lodestonepacific.com/quote.php

Try Me!

Toroid Mount Selector

Search for a part to match your applications, download the .pdf
www.lodestonepacific.com/selectoroid.php

NEW!

REACH Docs Database

Search for REACH documents, view or download the certifications .pdf.
www.lodestonepacific.com/reach.php

NEW!

Find a Coil Winder

Search our Coil Winder Data Base, for capabilities to match your specs.
www.lodestonepacific.com/coilwinders.php