


DIMENSIONS

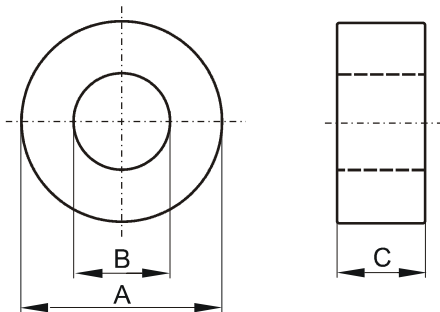

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	25.34	25.15	26.29
I.D. (B)	12.7	11.81	12.83
Ht. (C)	9.53	9.66	10.16
Eff. Parameters			
Ae mm²	le mm		Ve mm³
57.9	55.3		3199

INDUCTANCE

AL value (nH/T²)	Test conditions
3627 ± 20%	10 kHz, 0.5 mT (For N=5, use 0.86 mA), 25°C

CORE LOSSES

P_i max	Production lot limit Max avg	Test conditions
< 0.70 W (< 220 mW/cm ³)	< 0.64 W (< 200 mW/cm ³)	25 kHz, 200 mT, 100 °C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown 2000VDC Min Wire-to-Wire.

NOTE

Spec. modifications	Previous	Revised
2007-09-19	Bare Nom OD = 25.4 Losses: General F material	Bare Nom OD = 25.34 Losses: Detail as indicated