
WATTAGE + COLOR TEMPERATURE SELECTABLE BACK-LIT FLAT PANELS



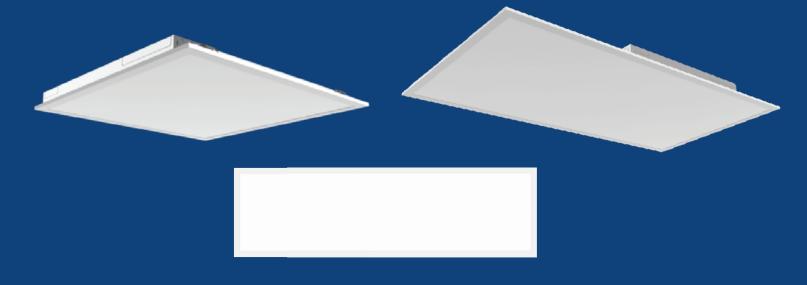

Our 1x4, 2x2, 2x4 Back-Lit Flat Panels have built-in wattage and color selectable options making it easy to adjust while in the field.

Flat Panels have a 0-10V dimmable driver and an emergency backup battery version is also available. These fixtures are great in applications like offices, schools, hospitals, and factories.

| PART NUMBERS | | | |
|--|------------------------|--|--|
| 1 x 4 Standard | ZL-FP-PA-CCT-1X4-MK | | |
| 1 x 4 with Emergency Battery Backup | ZL-FP-PA-CCT-1X4-EM-MK | | |
| 2 x 2 Standard | ZL-FP-PA-CCT-2X2-MK | | |
| 2 x 2 with Emergency Battery Backup | ZL-FP-PA-CCT-2X2-EM-MK | | |
| 2 x 4 Standard | ZL-FP-PA-CCT-2X4-MK | | |
| 2 x 4 with Emergency Battery Backup | ZL-FP-PA-CCT-2X4-EM-MK | | |

| PRODUCT SPECIFICATIONS | | | | | |
|------------------------|---------------------------|---------------------------|---------------------------|--|--|
| | 1 x 4 | 2 x 2 | 2 x 4 | | |
| WATTAGES | 25/30/40W selectable | 20/30/40W selectable | 30/40/50W selectable | | |
| COLOR TEMPS | 35/40/50K selectable | 35/40/50K selectable | 35/40/50K selectable | | |
| VOLTAGE INPUT | 100-277 VAC | 120-277 VAC | 120-277 VAC | | |
| EFFICACY | 130 lm/W | 125 lm/W | 125 lm/W | | |
| LENS | Frosted | Frosted | Frosted | | |
| CRI | >80 | >80 | >80 | | |
| AMBIENT TEMP | -25 to 40C; -4 to 104F | -25 to 40C; -4 to 104F | -25 to 40C; -4 to 104F | | |
| RATED | IP20 | IP20 | IP20 | | |
| LISTED | ULC | ULC | UL | | |
| WARRANTY | 5 years | 5 years | 5 years | | |














DIMENSIONS

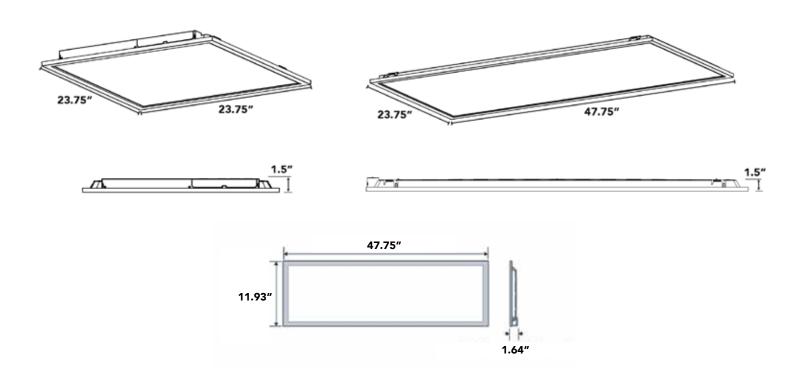

LUMENS

| WATTAGE | 1 x 4 | 2 x 2 | 2 x 4 |
|---------|-------|-------|-------|
| 20W | 2,600 | 2,500 | 2,500 |
| 30W | 3,900 | 3,750 | 3,750 |
| 35W | 4,550 | 4,375 | 4,375 |
| 40W | 5,200 | 5,000 | 5,000 |
| 50W | 6,500 | 6,250 | 6,250 |



OPTIONS

EMERGENCY BACK-UP LED DRIVER





• Part Number: BL-EMRG-FXT-8D-A

• Wattages: 8W

• Voltage Input: 100-347VAC • Output Voltage: 170VDC • Input Power: 12W max.

• Battery: Lithium

• Battery Charging: 24 hours

• Operating Temperature: 32 – 122F • Emergency Power: 90 minutes • Dimensions: 12.51" x 1.26" x 0.83"

• Warranty: 5 years

SURFACE MOUNT KIT



• Part Numbers: 1×4 – ZL-SF-1X4

2×2 - ZL-SF-2X2

2×4 - ZL-SF-2X4

• Dimensions: 1×4 – 12.25" x 48" x 3"

2×2 - 24.50" x 24.50" x 3.125"

2×4 – 24.50" x 47.813" x 3.125"

• For mounting your LED flat panel light to walls or ceilings

• Made of high-quality steel for enhanced durability

• Includes required hardware for swift and hasslefree installation



PHOTOMETRICS

