

LED LINEAR HIGH BAY - MK SERIES



APPLICATIONS

- Warehouses
- Gymnasiums
- Factories
- Exhibition halls

PRODUCT FEATURES

WATTAGES	80W, 160W, 260W
COLOR TEMPS	50K
INPUT VOLTAGE	120-277VAC
EFFICACY	150 lm/W
DIMMING	0-10V
CRI	>80
AMBIENT TEMP	-20 to 40C; -4 to 104F
RATED	IP20
AIRCRAFT CABLE	6.56 feet
WARRANTY	5 years
LENS	Frosted

SPECIFICATIONS

PRODUCT #	WATTAGE	DIMENSIONS (WxLxD)	LUMENS
ZL-HB-1x2-80W-50K-120/277V-MK	80W	12.50" x 23.75" x 2.875"	12,000
ZL-HB-1x2-160W-50K-120/277V-MK	160W	12.50" x 23.75" x 2.875"	24,000
ZL-HB-1x4-260W-50K-120/277V-MK	260W	12.50" x 45.75" x 2.875"	39,000


PRODUCT BUILDER

ex: ZL-HB-1X2-80W-50K-120/277V-MS

TYPE	SIZE	WATTAGE	COLOR TEMP.	INPUT VOLTAGE	OPTIONS
ZL-HB	-	-	-	-	-
	1x2 1x4	80W 160W 260W	50K	120/277V	EM-25W MS RM

LED LINEAR HIGH BAY - MK SERIES

DIMENSIONS

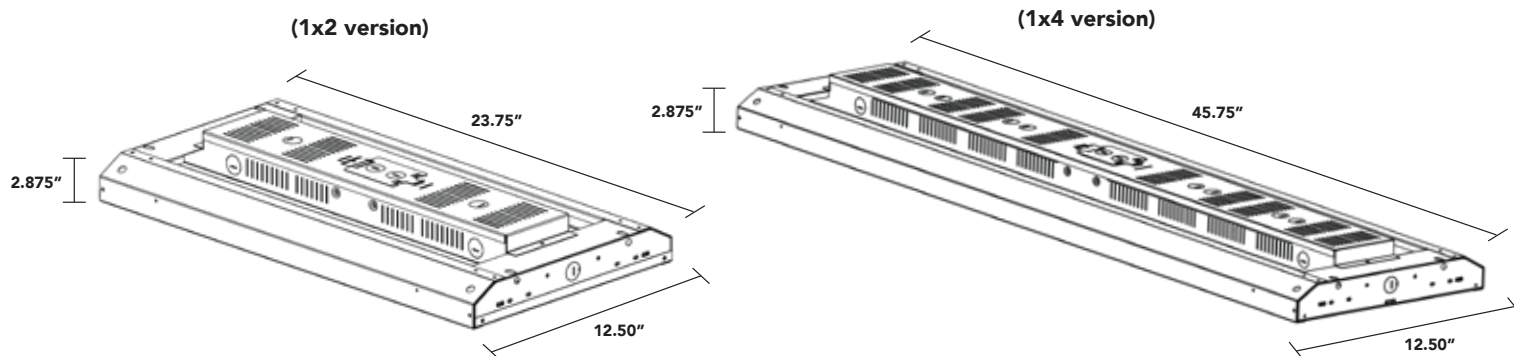

OPTIONS

EMERGENCY DRIVER



- **MODEL:** 25W
- **PART NUMBER:** BL-EMRG-FXT-25D-A
- **INPUT VOLTAGE:** 100-347VAC
- **OUTPUT VOLTAGE:** 170VDC
- **EMERGENCY POWER:** 25W
- **EMERGENCY TIME:** 90 mins
- **DIMENSIONS:** 13.1" x 1.97" x 0.94"
- **AMBIENT TEMPERATURE:** 32-122F
- **BATTERY:** Lithium
- **WARRANTY:** 5 years

MICROWAVE SENSOR



REMOTE




AIRCRAFT CABLE (STANDARD)




LED LINEAR HIGH BAY - MK SERIES

PHOTOMETRICS

80W Linear High Bay

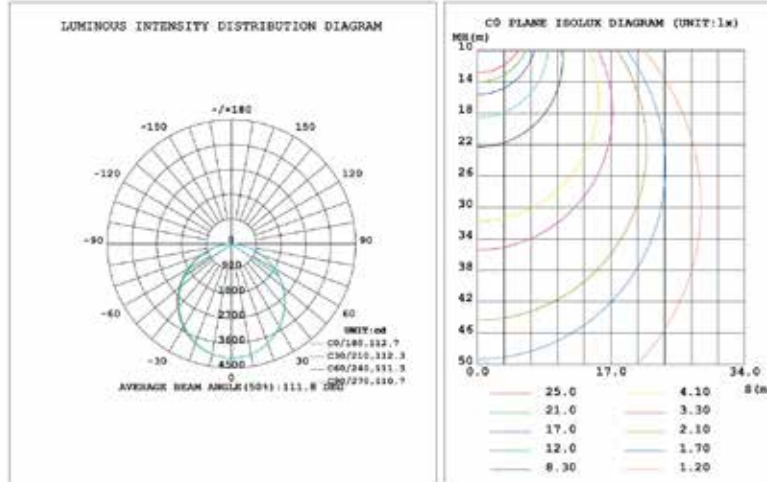

160W Linear High Bay

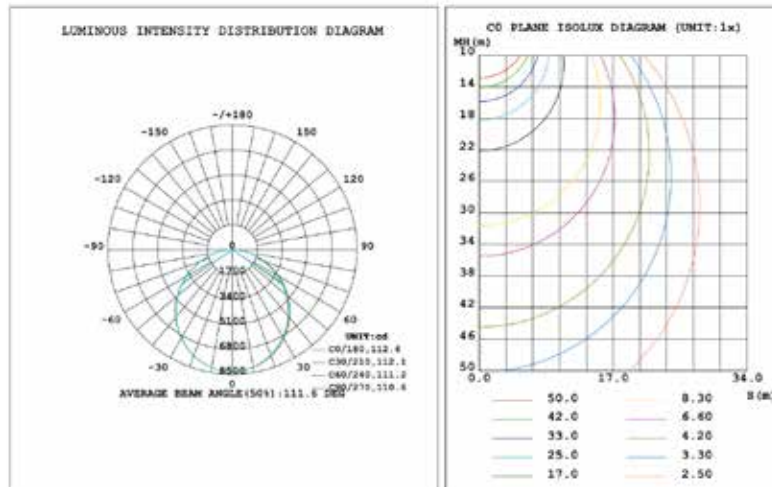

260W Linear High Bay

