




*MP Series modular sensors enable users to customize a sensing solution for almost any application. For this reason, the components of this series are sold separately. Refer to pages 594-595 for instruction on how to assemble an MP Series sensor.*

## MP Series Modular Photoelectric Sensors


- Harsh Duty
- Modular design
  - Exchangeable rotatable heads
  - Limit switch and mini style plug-in bases
  - Screw terminal, preleaded, and connector version receptacles
- Withstands 1200 psi washdown, IP69K
- 6 A SPDT and 5 A DPDT relay models
- Multifunction timer/logic cards available
- DC, AC, AC/DC models



### Diffuse Mode

**Sensing Ranges:** 300 mm, 450 mm, 760 mm, 900 mm, 1.3 m, 1.8 m, 3 m

**Outputs:** Dependent on base selected




### Retro-Reflective Mode

**Features:**

- Polarization filter to detect shiny objects

**Sensing Ranges:** 4.5 m, 6 m, 9 m


**Outputs:** Dependent on base selected



### Thru-Beam Mode

**Sensing Ranges:** 36 m, 60 m

**Outputs:** Dependent on base selected



### Fiber Optic Mode

**Sensing Ranges:** Dependent on fibers selected

**Outputs:** Dependent on base selected

See page 610-620 for MP Series sensing characteristics, wiring, dimensions and accessories.

# BUILD AN MP SENSOR

# 1. SELECT A HEAD



STANDARD HEADS (pages 596-597)		Models
	Diffuse: 450 mm range, 1 ms response, plastic lens, infrared	MPD6HD ⚡
	Diffuse: 3 m range, 10 ms response, glass lens, infrared	MPD1HD •
	Diffuse: 3 m range, 10 ms response, plastic lens, infrared	MPD2HD ⚡
	Diffuse: 900 mm range, 10 ms response, plastic lens, infrared	MPD4HD ⚡
	Diffuse: 1.3 m range, 10 ms response, plastic lens, infrared	MPD8HD
	Polarized Retro-Reflective: 4.5 m range, 1 ms response, glass lens, visible red	MPP6HD ⚡
	Polarized Retro-Reflective: 6 m range, 10 ms response, glass lens, visible red	MPP1HD •
	Retro-Reflective: 9 m range, 1 ms response, glass lens, infrared	MPL16HD
	Retro-Reflective: 9 m range, 1 ms response, plastic lens, infrared	MPL6HD •
	Retro-Reflective: 9 m range, 10 ms response, glass lens, infrared	MPL1HD
	Retro-Reflective: 9 m range, 10 ms response, plastic lens, infrared	MPL2HD ⚡
	Thru-Beam: 60 m range, transmitter, glass lens, infrared	MPE1HD •
	Thru-Beam: 60 m range, transmitter, plastic lens, infrared	MPE2HD ⚡
	Thru-Beam: 60 m range, receiver, 1 ms response, glass lens, infrared	MPR16HD
	Thru-Beam: 60 m range, receiver, 1 ms response, plastic lens, infrared	MPR6HD ⚡
	Thru-Beam: 60 m range, receiver, 10 ms response, glass lens, infrared	MPR1HD •
	MPF Fiber Optic: 1 ms response, infrared	MPF6HD ⚡
	MPF Fiber Optic: 5 ms response, visible red	MPF2HD
	MPG Fiber Optic: 1 ms response, infrared	MPG6HD •

ANALOG HEADS (page 598)		Models
	MPF Fiber Optic: infrared	MPF5HD

2-WIRE AC HEADS (pages 598-600)		Models
	Diffuse: 300 mm range, plastic lens, infrared	MP2D7HD
	Diffuse: 760 mm range, plastic lens, infrared	MP2D4HD ⚡
	Diffuse: 1.8 m range, glass lens, infrared	MP2D1HD
	Diffuse: 1.8 m range, plastic lens, infrared	MP2D2HD •
	Polarized Retroreflective: 4.5 m range, glass lens, visible red	MP2P1HD
	Retroreflective: 9 m range, glass lens, infrared	MP2L1HD
	Retroreflective: 9 m range, plastic lens, infrared	MP2L2HD ⚡
	Thru-Beam: 36 m range, transmitter, glass lens, infrared	MPE3HD
	Thru-Beam: 36 m range, transmitter, plastic lens, infrared	MPE4HD
	Thru-Beam: 36 m range, receiver, plastic lens, infrared	MP2R2HD
	MPF Fiber Optic: infrared	MP2F1HD
	MPF Fiber Optic: visible red	MP2F2HD

## 2. SELECT A BASE

## 3. SELECT A RECEPTACLE

PLUG-IN BASES (pages 602-603)		Models
AC/DC	10.8-140 VDC/18-140 VAC 4-wire FET w/output indicator	MPS18HD ⚡
DC	10-30 VDC emitter base only	MPS30HD
	10-30 VDC NPN and PNP, 4-wire DC	MPS33HD ⚡
	10-30 VDC NPN N.O./N.C., 4-wire DC	MPS31HD ●
	10-30 VDC PNP, 3-wire DC	MPS32HD ●
AC	198-264 VAC 4-wire solid state AC relay 1 A max.	MPS12HD
	198-264 VAC emitter base only	MPS13HD
	92-132 VAC 4-wire bilateral FET (AC/DC) 100 mA max.	MPS17HD ●
	92-132 VAC 4-wire solid state AC relay 1 A max.	MPS11HD ⚡
	92-132 VAC emitter base only	MPS10HD ●

RECEPTACLE	Models
Standard 4-terminal, 1/2" NPT conduit thread	MPB20 ⚡
5-pin mini connector	MPB22 ●
4-pin micro connector	MPB27 ○

AC DPDT RELAY BASE (page 603)		Model
RELAY	DPDT, 92-132 VAC, 5 A, output indicator	MPSD11HD ⚡

DPDT RECEPTACLE	Models
8-terminal, 1/2" NPT conduit hole	MPB23 ●
8-terminal, 3/4" NPT conduit hole	MPB24

SPDT RELAY BASES (page 604)		Models
DC	SPDT, 10-30 VDC, 6 A	MPV31HD ●
SPDT RELAY AC	SPDT, 103-132 VAC, 6 A	MPV11HD
	SPDT, 192-264 VAC, 6 A	MPV12HD
	SPDT, 20-260 VAC/VDC, 6 A	MPV14HD ●
	SPDT, 22-26 VAC, 6 A	MPV13HD

NO RECEPTACLE NEEDED

MINI STYLE BASES (pages 605-607)		Models
3-WIRE DC	10-30 VDC, 2 m preleaded cable, emitter base only	MPT30HD ▲
	10-30 VDC, NPN N.O., 2 m preleaded cable	MPT31HD ●
	10-30 VDC, PNP N.O., 2 m preleaded cable	MPT32HD ▲
	10-30 VDC, NPN and PNP, N.O., 2 m preleaded cable	MPT33HD ⚡
4-WIRE AC	92-132VAC, 2m preleaded cable, emitter base only	MPT10HD ▲
	92-132 VAC, 4-wire bilateral FET (AC/DC), 100 mA max., 2 m preleaded cable	MPT17HD ▲
	92-132 VAC, 4-wire solid state AC relay, 0.5 A max., 2 m preleaded cable	MPT11HD ▲
AC/DC	22-26 VAC/VDC, 4-wire bilateral FET, 100 mA max., 2 m preleaded cable	MPT16HD ●
MICRO CONNECT. DC	10-30 VDC, NPN N.O., 4-pin micro connector	MPT41HD-CM ○
	10-30 VDC, PNP N.O., 4-pin micro connector	MPT42HD-CM ●
	10-30 VDC, NPN and PNP, N.O., 4-pin micro connector	MPT43HD-CM ⚡
	10-30 VDC, 4-pin micro connector, emitter base only	MPT40HD-CM ○
MINI CONNECT. DC	10-30 VDC, NPN and PNP, 4-pin mini connector	MPT43HD ⚡
	10-30 VDC, NPN N.O., 4-pin mini connector	MPT41HD ●
	10-30 VDC, PNP N.O., 4-pin mini connector	MPT42HD ●
MINI CONNECT. AC	92-132 VAC, 3-pin mini connector, emitter base only	MPT20HD ●
	92-132 VAC, 4-wire solid state AC relay, 0.5 A max., 5-pin mini connector	MPT21HD ●
	92-132 VAC, 4-wire bilateral FET (AC/DC), 100 mA max., 5-pin mini connector	MPT27HD ●
MINI AC/DC	10.8-140 VDC/18-140 VAC, 4-wire FET w/output ind., 5-pin mini connector	MPT28HD ●
MINI RELAY AC	92-132 VAC, 6 A, SPDT relay, 2 m preleaded cable	MPW11HD ●
	92-132 VAC, 6 A, SPDT relay, 5-pin mini connector	MPW21HD ●

### ELECTRICAL CONNECTION KEY

- Terminal connectors
- Mini connectors
- Micro connectors
- ▲ Preleaded cable

NO RECEPTACLE NEEDED


ANALOG PLUG-IN BASE (page 608)		Model
ANALOG	12-24 VDC analog output (0-5 VDC or 4-20 mA)	MPS35HD

RECEPTACLE	Models
Standard 4-terminal, 1/2" NPT conduit thread	MPB20 ⚡
5-pin mini connector	MPB22 ●

2-WIRE PLUG-IN BASES (page 609)		Models
DC	10-30 VDC emitter base only	MPS30HD
2-WIRE AC	92-132 VAC emitter base only	MPS10HD ●
	198-264 VAC emitter base only	MPS13HD
	22-26 VAC/VDC emitter base only	MPS14HD
	22-260 VAC plug-in base	MP2S11HD ⚡

- ⚡ Stocked item
  - Typical delivery 4 weeks or less
- Consult factory for all other models


## STANDARD HEADS



### Diffuse Mode

Specifications	Infrared			
SENSING RANGE	450 mm	900 mm	1.3 m	3 m
SENSITIVITY ADJUSTMENT	Yes	Yes	Yes	Yes
MODEL NUMBER(S)	MPD6HD	MPD4HD	MPD8HD	MPD1HD
	—	—	—	MPD2HD
RESPONSE TIME*	≤ 1 ms	≤ 10 ms	≤ 10 ms	≤ 10 ms
HOUSING MATERIAL	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENS	Plastic	Plastic	Plastic	Glass (1HD)/plastic (2HD)
ADDITIONAL DATA	See page 601			

\*NOTE: Total response time is the sum of the sensor head and base response times.




### Retro-Reflective Mode

Specifications	Visible Red		Infrared	
SENSING RANGE	4.5 m	6 m	9 m	9 m
SENSITIVITY ADJUSTMENT	Yes	Yes	Yes	Yes
POLARIZED FILTER	Yes	Yes	No	No
MODEL NUMBER(S)	MPP6HD	MPP1HD	MPL1HD	MPL16HD
	—	—	MPL2HD	MPL6HD
RESPONSE TIME*	≤ 1 ms	≤ 10 ms	≤ 10 ms	≤ 1 ms
HOUSING MATERIAL	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENS	Glass	Glass	Glass (1HD)/plastic (2HD)	Glass (16HD)/plastic (6HD)
ADDITIONAL DATA	See page 601			

\*NOTE: Total response time is the sum of the sensor head and base response times.


## STANDARD HEADS



### Thru-Beam Mode

Specifications		Infrared		
SENSING RANGE		60 m	60 m	60 m
SENSITIVITY ADJUSTMENT		Yes	Yes	Yes
MODEL NUMBER(S)	Transmitter	MPE1HD	MPE1HD	MPE2HD
	Receiver	MPR1HD	MPR16HD	MPR6HD
RESPONSE TIME*		≤ 10 ms	≤ 1 ms	≤ 1 ms
HOUSING MATERIAL		Polycarbonate	Polycarbonate	Polycarbonate
	LENS	Glass	Glass	Plastic
ADDITIONAL DATA		See page 601		

\*NOTE: Total response time is the sum of the sensor head and base response times.



### Fiber Optic Mode


Specifications		Visible Red	Infrared
SENSING RANGE		Determined by cable†	Determined by cable†
SENSITIVITY ADJUSTMENT		Yes	Yes
MODEL NUMBER(S)		MPF2HD	MPF6HD
		—	MPG6HD
RESPONSE TIME*		≤ 5 ms	≤ 1 ms
HOUSING MATERIAL		Polycarbonate	Polycarbonate
ADDITIONAL DATA		See page 601	

\*NOTE: Total response time is the sum of the sensor head and base response times.



See pages 761-796 for fiber optic lengths and specifications.

## ANALOG HEADS




### Fiber Optic Mode

Specifications	Infrared
SENSING RANGE	Determined by cable <sup>†</sup>
SENSITIVITY ADJUSTMENT	Yes
MODEL NUMBER(S)	MPF5HD
RESPONSE TIME	≤ 10 ms
HOUSING MATERIAL	Polycarbonate
ADDITIONAL DATA	See page 601



<sup>†</sup> See pages 761-796 for fiber optic lengths and specifications.

## 2-WIRE AC HEADS




### Diffuse Mode

Specifications	Infrared		
SENSING RANGE	300 mm	760 mm	1.8 m
SENSITIVITY ADJUSTMENT	Yes	Yes	Yes
MODEL NUMBER(S)	MP2D7HD	MP2D4HD	MP2D1HD
	—	—	MP2D2HD
RESPONSE TIME*	≤ 10 ms	≤ 15 ms	≤ 15 ms
HOUSING MATERIAL	Polycarbonate	Polycarbonate	Polycarbonate
LENS	Plastic	Plastic	Glass (1HD)/plastic (2HD)
ADDITIONAL DATA	See page 601		

\*NOTE: Total response time is the sum of the sensor head and base response times.


## 2-WIRE AC HEADS



### Retro-Reflective Mode

Specifications	Visible Red	Infrared
SENSING RANGE	4.5 m	9 m
SENSITIVITY ADJUSTMENT	Yes	Yes
POLARIZED FILTER	Yes	No
MODEL NUMBER(S)	MP2P1HD	MP2L1HD
	—	MP2L2HD
RESPONSE TIME*	≤ 10 ms	≤ 10 ms
HOUSING MATERIAL	Polycarbonate	Polycarbonate
LENS	Glass	Glass (1HD)/plastic (2HD)
ADDITIONAL DATA	See page 601	

\*NOTE: Total response time is the sum of the sensor head and base response times.



### Thru-Beam Mode

Specifications	Infrared
SENSING RANGE	36 m
SENSITIVITY ADJUSTMENT	Yes
MODEL NUMBER(S)	MPE3HD
	MPE4HD
	MP2R2HD
RESPONSE TIME*	≤ 10 ms
HOUSING MATERIAL	Polycarbonate
LENS	Glass (3HD) Plastic (4HD/2HD)
ADDITIONAL DATA	See page 601

\*NOTE: Total response time is the sum of the sensor head and base response times.

## 2-WIRE AC HEADS



### Fiber Optic Mode

Specifications	Visible Red	Infrared
SENSING RANGE	Determined by cable†	Determined by cable†
SENSITIVITY ADJUSTMENT	Yes	Yes
MODEL NUMBER(S)	MP2F2HD	MP2F1HD
RESPONSE TIME*	≤1 ms	≤1 ms
HOUSING MATERIAL	Polycarbonate	Polycarbonate
ADDITIONAL DATA	See page 601	

\*NOTE: Total response time is the sum of the sensor head and base response times.



See pages 761-796 for fiber optic lengths and specifications.



## MP Series Head Specifications


### MP Series Head Specifications

<b>LED(s)</b>	Yes (2)
<b>OPERATING MODE</b>	Light on/dark on
<b>PROTECTION (IEC)</b>	IP69K when all components are properly assembled
<b>TEMPERATURE RANGE</b>	<i>WORKING</i> -22 °F to +158 °F <i>STORAGE</i> -67 °F to +185 °F
<b>HUMIDITY RANGE</b>	95% RH (non-condensing)
<b>VIBRATION</b>	10 G, 10-500 Hz
<b>SHOCK</b>	50 G
<b>HEAD HOUSING</b>	Glass-filled polycarbonate
<b>ACCESS COVER</b>	Glass-filled acetal, Type 20
<b>SEALS</b>	Santoprene
<b>STANDARDS</b>	EN 60947-5-2
<b>APPROVALS</b>	CE UL SP

### Reference Guide

<b>SENSING CHARACTERISTICS</b>	Pages 610-612
<b>WIRING DIAGRAMS</b>	Pages 613-614
<b>DIMENSIONS</b>	Page 615
<b>ACCESSORIES</b>	Pages 616-619

## Operating/Adjustment Of All Heads

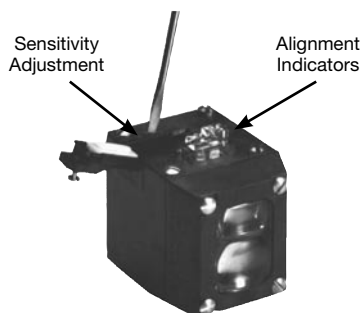

### Light On/Dark On Mode Selector Switch

Every MP Series photoelectric sensor head has a light on/dark on selector switch located on the PC board inside the sensor head. The operating mode should be set prior to assembling the head to its respective base.

**Dark On** - The output (load) is energized when the light is blocked (retro and thru scan), or object absent (diffuse scan); the photosensor is dark.

**Light On** - The output (load) is energized when the light is not blocked (retro and thru scan), or object is present (diffuse scan); the photosensor is illuminated.

### Alignment Indicators

Two LED indicators are located on top of the sensor head. Sufficient light level turns the green light ON. When the light level decreases to 150% of the minimum operating level, the red light turns ON.

### Sensitivity Adjustment

Use a small blade screwdriver to open the cover on top of the sensor head. This exposes the sensitivity adjustment screw, labeled "S".

The 15-turn sensitivity potentiometer will normally click at both extremes of the sensitivity range.


- Turn the screw clockwise to increase the sensitivity.
- Turn the screw counterclockwise to decrease sensitivity.
- Snap the cover closed and fasten with a screw.

### Fiber Optic Head Options

Fiber optic heads are furnished in two cable connection styles, MPF and MPG, as designated by the first three letters in their catalog listings.

MPF fiber optic sensor heads use dual slot glass cables and are part of the original MP product line. The sensor head has a dual slot end tip bezel connection on the sensor head which maintains compatibility with FE-MLS8C-FO sensors. With the MPZFOADPT adapter, the MPF heads can accept plastic cables too.

MPG fiber optic sensor heads use universal style glass cables. MPG heads accept the same universal style cables used with our MHP miniature high performance sensors and furnished by many manufacturers of photoelectric products. They cannot be used with plastic cables.

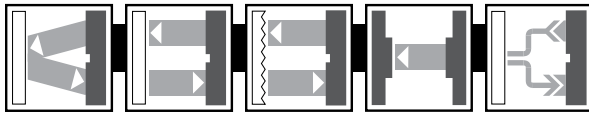

## PLUG-IN BASE

Specifications			
	DC	AC	AC/DC
MODEL NUMBER(S)	MPS30HD†	MPS10HD†	MPS18HD
	MPS31HD	MPS11HD	—
	MPS32HD	MPS12HD	—
	MPS33HD	MPS13HD†	—
	—	MPS17HD	—
OUTPUT	1 NPN (31HD) 1 PNP (32HD) 1 NPN and 1 PNP (33HD)	Solid state relay (11HD/12HD) Thyristor (17HD)	Thyristor
LOAD CURRENT	250 mA max. (31HD/32D) 100 mA max. (33HD)	5 mA-1 A (11HD/12HD) 100 mA max. (17HD)	100 mA max.
LEAKAGE CURRENT	≤ 10 µA	≤ 200 µA (11HD) ≤ 240 µA (12HD) ≤ 10 µA (17HD)	≤ 10 µA
INRUSH CURRENT	—	30 A for 8 ms (11HD/12HD) 250 mA for 8 ms (17HD)	250 mA for 8 ms, (non-repetitive)
VOLTAGE DROP	≤ 1.0 VDC (31HD/32HD) ≤ 0.8 VDC (33HD)	≤ 1.4 VAC at rated load (11HD/12HD) ≤ 3 V at 60 mA (17HD)	≤ 5 VDC (DC operation)
RESPONSE TIME*	≤ 10 µs	≤ 10 ms (11HD/12HD) ≤ 2 ms (17HD)	≤ 2 ms
SHORT CIRCUIT AND OVERLOAD PROTECTION	No (30HD/31HD/32HD) Yes (33HD)	No	No
REVERSE POLARITY PROTECTION	Yes	No	No
SUPPLY VOLTAGE	10-30 VDC	92-132 VAC, 50/60 Hz (10HD/11H/17HD) 198-264 VAC, 50/60 Hz (12HD/13HD)	10.8-140 VDC 18-140 VAC, 50/60 Hz
CURRENT CONSUMPTION	≤ 25 mA	≤ 70 mA	≤ 50 mA
ELECTRICAL CONNECTION	Dependent on receptacle selection	Dependent on receptacle selection	Dependent on receptacle selection
ADDITIONAL DATA	See page 603		

\*NOTE: Total response time is the sum of the sensor head and base response times.

†NOTE: Emitter base only.



## PLUG-IN BASE

### Plug-in Base Specifications

TEMPERATURE RANGE	WORKING	-22 °F to +158 °F
	STORAGE	-67 °F to +185 °F
SHOCK		50 G
VIBRATION		10 G, 10-500 Hz
HUMIDITY RANGE		95% RH (non-condensing)
HEAD/BASE SEAL		Santoprene
RECEPTACLE/BASE SEAL		Buna-N
PROTECTION (IEC)		IP69K when all components are properly assembled
HOUSING MATERIAL		Glass-filled Polysulfone
STANDARDS		EN 60947-5-2
APPROVALS		CE UL SP

## RECEPTACLE MODELS

MPB20	Standard 4-terminal, 1/2" NPT conduit thread
MPB22	5-pin mini connector
MPB27	4-pin micro connector



See pages  
803-854 for  
cordsets

## DPDT RELAY BASE

### Specifications

	AC
MODEL NUMBER	MPSD11HD
SUPPLY VOLTAGE	92-132 VAC, 50/60 Hz
OUTPUT	DPDT relay
ELECTRICAL CONTACT RATING	250 VAC/5 A
POWER CONSUMPTION	≤ 6.6 VA
MECHANICAL LIFE OF RELAY	5 x 10 <sup>7</sup> operations
RESPONSE TIME*	≤ 10 ms
PROTECTION (IEC)	IP69K when all components are properly assembled
TEMPERATURE RANGE	WORKING -22 °F to 158 °F
	STORAGE -67 °F to 185 °F
SHOCK	10G
VIBRATION	6 G, 10-55 Hz @ double amplitude of 1 mm
HUMIDITY	95% RH (non-condensing)
HOUSING MATERIAL	Glass-filled Polysulfone
STANDARDS	EN 60947-5-2
APPROVALS	CE UL SP
ELECTRICAL CONNECTION	dependent on receptacle selection

\*NOTE: Total response time is the sum of the sensor head and base response times.

## DPDT RECEPTACLE MODELS

MPB23	8-terminal, 1/2" NPT conduit thread
MPB24	8-terminal, PG 13.5 conduit thread



## SPDT RELAY BASE

Specifications		
MODEL NUMBER(S)	DC	AC
	MPV31HD	MPV11HD
	—	MPV12HD
	—	MPV13HD
	—	MPV14HD
OUTPUT	SPDT relay	SPDT relay
SUPPLY VOLTAGE	10-30 VDC	103-132 VAC, 50/60 Hz (11HD) 192-264 VAC, 50/60 Hz (12HD) 22-26 VAC, 50/60 Hz (13HD) 20-260 VAC/DC (14HD)
POWER CONSUMPTION	≤ 10 VA	≤ 10 VA (11HD) ≤ 18.5 VA (12HD) ≤ 2 VA (13HD) ≤ 4 VA (14HD)
ELECTRICAL CONTACT RATING	DC	28 V/6 A
	AC	24 V/6 A
ELECTRICAL CONNECTION		5-terminal 1/2" conduit hole




## SPDT Relay Base Specifications

MECHANICAL LIFE OF RELAY		20 x 10 <sup>6</sup> operations
RESPONSE TIME*		≤ 10 ms
TEMPERATURE RANGE	WORKING	-22 °F to +158 °F
	STORAGE	-67 °F to +185 °F
PROTECTION (IEC)		IP69K when all components are properly assembled
SHOCK		10 G
VIBRATION		10 G, 10-100 Hz
HUMIDITY RANGE		95% RH (non-condensing)
BASE		Glass-filled polycarbonate
COVER/BASE SEAL		Buna-N
HEAD/BASE SEAL		Santoprene
COVER		Die cast zinc
STANDARDS		EN 60947-5-2
APPROVALS		CE UL SF

\*NOTE: Total response time is the sum of the sensor head and base response times.



## MINI STYLE BASE





Specifications	DC	AC	AC/DC
MODEL NUMBER(S)	MPT30HD†	MPT10HD†	MPT16HD
	MPT31HD	MPT11HD	—
	MPT32HD	—	—
	MPT33HD	MPT17HD	—
OUTPUT	1 NPN (31HD) 1 PNP (32HD) 1 NPN and 1 PNP (33HD)	Solid state relay (11HD) Thyristor (17HD)	Thyristor
LOAD CURRENT	250 mA max. (31HD/32HD) 100 mA max. (33HD)	5 mA-500 mA (11HD) 100 mA max. (17HD)	100 mA max.
LEAKAGE CURRENT	≤ 10 µA	≤ 400 µA (11HD) ≤ 10 µA (17HD)	≤ 10 µA
INRUSH CURRENT	—	12 A for 16 ms (11HD) 250 mA for 8 ms (17HD)	250 mA for 8 ms, (non-repetitive)
VOLTAGE DROP	≤ 1 VDC (32HD/31HD) ≤ 0.6 VDC (33HD)	≤ 1.2 VAC at rated (11HD) ≤ 3 V (17HD)	≤ 3 V (DC operation)
RESPONSE TIME*	≤ 10 µs	≤ 10 ms (11HD) ≤ 2 ms (17HD)	≤ 2 ms
SHORT CIRCUIT AND OVERLOAD PROTECTION	No (30HD/31HD/32HD) Yes (33HD)	No	No
REVERSE POLARITY PROTECTION	No	No	No
SUPPLY VOLTAGE	10-30 VDC	92-132 VAC, 50/60 Hz (10HD/11H/17HD) 198-264 VAC, 50/60 Hz (12HD/13HD) 24 VAC, 50/60 Hz (14HD)	24 VAC/VDC
CURRENT CONSUMPTION	≤ 25 mA	≤ 70 mA	≤ 70 mA
ELECTRICAL CONNECTION	 2-meter cable, PVC covered, 4-conductor, #18 AWG	 2-meter cable, PVC covered, 4-conductor, #18 AWG	 2-meter cable, PVC covered, 4-conductor, #18 AWG
ADDITIONAL DATA	See page 607		

\*NOTE: Total response time is the sum of the sensor head and base response times.

†NOTE: Emitter base only.




### MINI STYLE BASE

Specifications				
	DC	DC	AC	AC/DC
MODEL NUMBER(S)	—	MPT40HD-CM†	MPT20HD†	MPT28HD
	MPT41HD	MPT41HD-CM	MPT21HD	—
	MPT42HD	MPT42HD-CM	MPT27HD	—
	MPT43HD	MPT43HD-CM	—	—
OUTPUT	1 NPN (41HD) 1 PNP (42HD) 1 NPN and 1 PNP (43HD)	1 NPN (41HD) 1 PNP (42HD) 1 NPN and 1 PNP (43HD)	Solid state relay (21HD) Thyristor (27HD)	Thyristor
LOAD CURRENT	250 mA max. (41HD/42D) 100 mA max. (43HD)	250 mA max. (41HD/42D) 100 mA max. (43HD)	500 mA max. (21HD) 100 mA max. (27HD)	100 mA max.
LEAKAGE CURRENT	≤ 10 µA	≤ 10 µA	≤ 400 µA (21HD) ≤ 10 µA (27HD)	≤ 10 µA
INRUSH CURRENT	—	—	12 A for 16 ms (21HD/22HD) 250 mA for 8 ms (27HD)	250 mA for 8 ms (non-repetitive)
VOLTAGE DROP	≤ 1 VDC (42HD/41HD) ≤ 0.6 VDC (43HD)	≤ 1 VDC (42HD/41HD) ≤ 0.6 VDC (43HD)	≤ 1.2 VAC (21HD) ≤ 3 V (27HD)	≤ 5 V (DC operation)
RESPONSE TIME*	≤ 10 µs	≤ 10 µs	≤ 10 ms (21HD) ≤ 2 ms (27HD)	≤ 2 ms
SHORT CIRCUIT AND OVERLOAD PROTECTION	No (40HD/41HD/42HD) Yes (43HD)	No (40HD/41HD/42HD) Yes (43HD)	No	No
REVERSE POLARITY PROTECTION	Yes	Yes	No	No
SUPPLY VOLTAGE	10-30 VDC	10-30 VDC	92-132 VAC, 50/60 Hz	10.8-140 VDC 18-140 VAC, 50/60 Hz
CURRENT CONSUMPTION	≤ 25 mA	≤ 25 mA	≤ 70 mA	≤ 70 mA
ELECTRICAL CONNECTION	 Quick disconnect type V94	 Quick disconnect type V1	 Quick disconnect type V93 (20HD) type V95 (21HD/27HD)	 Quick disconnect type V95
ADDITIONAL DATA	See page 607			

\*NOTE: Total response time is the sum of the sensor head and base response times.

†NOTE: Emitter base only.

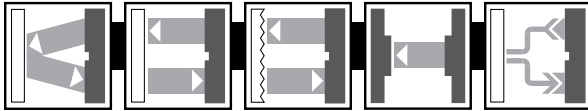



## MINI STYLE BASE

### Mini Style Base Specifications


<b>TEMPERATURE RANGE</b>	<i>WORKING</i>	-22 °F to +158 °F
	<i>STORAGE</i>	-67 °F to +185 °F
<b>SHOCK</b>		50 G
<b>VIBRATION</b>		10 G, 10-500 Hz
<b>HUMIDITY RANGE</b>		95% RH (non-condensing)
<b>BASE</b>		Glass-filled polycarbonate
<b>BASE SEAL</b>		Santoprene
<b>PROTECTION (IEC)</b>		IP69K when all components are properly assembled
<b>STANDARDS</b>		EN 60947-5-2
<b>HOUSING MATERIAL</b>		Glass-filled Polysulfone
<b>APPROVALS</b>		CE UL SP

## MINI RELAY BASE

### Specifications

		AC
<b>MODEL NUMBER(S)</b>		<b>MPW11HD</b>
		<b>MPW21HD</b>
<b>SUPPLY VOLTAGE</b>		92-132 VAC, 50/60 Hz
<b>POWER CONSUMPTION</b>		≤ 10 VA (including load)
<b>OUTPUT</b>		SPDT relay
<b>ELECTRICAL CONTACT RATING</b>	<i>DC</i>	30 V/6 A
	<i>AC</i>	125 V/6 A
<b>MECHANICAL LIFE OF RELAY</b>		50 x 10 <sup>6</sup> operations
<b>RESPONSE TIME*</b>		10 ms
<b>PROTECTION (IEC)</b>		IP69K when all components are properly assembled
<b>TEMPERATURE RANGE</b>	<i>WORKING</i>	-22 °F to 158° F
	<i>STORAGE</i>	-67 °F to 185 °F
<b>SHOCK</b>		20 G (no contact transfer) 100 G (no damage)
<b>VIBRATION</b>		10 G, 10-500 Hz
<b>HUMIDITY</b>		95% RH (non-condensing)
<b>HOUSING MATERIAL</b>		Glass-filled Polysulfone
<b>STANDARDS</b>		EN 60947-5-2
<b>APPROVALS</b>		CE UL SP
<b>ELECTRICAL CONNECTION</b>	<i>MPW11HD</i>	 2-meter cable, PVC covered, 4-conductor, #18 AWG
	<i>MPW21HD</i>	 Quick disconnect type V95

\*NOTE: Total response time is the sum of the sensor head and base response times.



## ANALOG PLUG-IN BASE

Specifications		DC
SENSING RANGE		Determined by cable†
MODEL NUMBER(S)		MPS35HD
OUTPUT	Voltage	0-5 VDC
	Current	4-20 mA
LOAD CURRENT		5 mA max.
DRIFT	(68°F to 140°F)	3% typical
	(0 to 68°F)	6% typical
SHORT CIRCUIT AND OVERLOAD PROTECTION		No
REVERSE POLARITY PROTECTION		Yes
SUPPLY VOLTAGE		12-24 VDC
POWER CONSUMPTION		≤ 40 mA
REPEATABILITY		± 1% typical
PROTECTION (IEC)		IP69K when all components are properly assembled
TEMPERATURE RANGE	WORKING	+32 °F to 140 °F
	STORAGE	-67 °F to 185 °F
HOUSING MATERIAL		Glass-filled Polysulfone
SHOCK		50 G
VIBRATION		10 G, 10-500 Hz
HUMIDITY		95% RH (non-condensing)
STANDARDS		EN 60947-5-2
APPROVALS		CE UL SP
ELECTRICAL CONNECTION		Dependent on receptacle selected

### APPLICATION CONSIDERATION

The MPF5HD head emits an IR beam, which is bounced off the detected object and returned. Depending on the distance to the object and its reflectivity, the head produces a signal with a magnitude proportional to the sensed distance between the object and the head. The MPS35 uses this signal to produce a voltage output and a current output.

The MPS35HD base provides a voltage output from 0-5VDC. The voltage output sources voltage to the user's load, which is then connected to the MPS35HD's negative supply terminal or ground. Current flows from the voltage output to ground. The voltage output can only supply up to 5mA of current and therefore, the load impedance must be 1000 ohms or more. Lower impedances will produce false output voltage readings.

The MPS35HD base also provides a current output from 4-20mA. The user's load is connected from the MPS35HD's positive supply terminal and to the analog current "output" terminal. The "output" pin sinks current (current flows into it). Output current is monitored through an internal resistor in the current amplifier. As the target is moved toward the sense head, increased current is sent to the load and to the sense resistor. Without limitations, this current would produce voltages across these two resistances that would exceed the MPS35HD's supply voltage. Under these conditions, the output current will reach some value and just stay there. Therefore, to ensure proper operation of the MPF5HD/ MPS35HD sensor, the current output load resistance cannot exceed 250 ohms. The current output can only operate with loads of 0-250 ohms.

The MPF5HD head produces only one output signal from which the MPS35HD produces its voltage output. The voltage output is then used to run the current amplifier via an internal connection. There is only one set of range and offset adjustments provided. These adjust both the voltage and current outputs. Due to differences in the two amplifiers, only one output can be set accurately. Therefore only one output should be used with the other left unconnected. Should it be necessary to use both outputs, the voltage output must see a minimum load resistance of 5000 ohms. This is necessary to prevent overloading of the sensor, which could produce incorrect output voltage and current values.



See pages 761-796 for fiber optic lengths and specifications.

### RECEPTACLE MODELS

MPB20	Standard 4-terminal, 1/2" NPT conduit thread
MPB22	5-pin mini connector



See pages 803-854 for cordsets



## 2-WIRE AC BASE




Specifications	AC/DC	AC
MODEL NUMBER(S)	MPS14HD†	MP2S11HD
SUPPLY VOLTAGE	22-26 VAC/DC	22-260 VAC
POWER CONSUMPTION	70 mA	—
OUTPUT	—	Solid state AC relay
LOAD CURRENT	—	500 mA max.
LEAKAGE CURRENT	—	≤ 1.9 mA
INRUSH CURRENT	—	5 A/8 ms
VOLTAGE DROP	—	≤ 10 V
RESPONSE TIME*	—	≤ 2 ms
SHORT CIRCUIT AND OVERLOAD PROTECTION	No	No
REVERSE POLARITY PROTECTION	No	Yes
ELECTRICAL CONNECTION	Dependent on receptacle selected	Dependent on receptacle selected

\*NOTE: Total response time is the sum of the sensor head and base response times.

†NOTE: Emitter base only.

**NOTE: For specifications on Models: MPS10HD, MPS13HD and MPS30HD emitter bases, see pages 602-603**

### 2-Wire AC Base Specifications

PROTECTION (IEC)	IP69K when all components are properly assembled	
TEMPERATURE RANGE	WORKING	-22 °F to +158 °F
	STORAGE	-67 °F to +185 °F
HOUSING MATERIAL	Glass-filled Polysulfone	
SHOCK	50 G	
VIBRATION	10 G, 10-500 Hz	
HUMIDITY RANGE	95% RH (non-condensing)	
PLUG-IN RECEPTACLE	Die-cast zinc	
STANDARDS	EN 60947-5-2	
APPROVALS	  	

### RECEPTACLE MODELS



MPB20	Standard 4-terminal, 1/2" NPT conduit thread
MPB22	5-pin mini connector






See pages  
803-854 for  
cordsets

## Standard Head Sensing Characteristics




### Diffuse Scan Sensing Characteristics

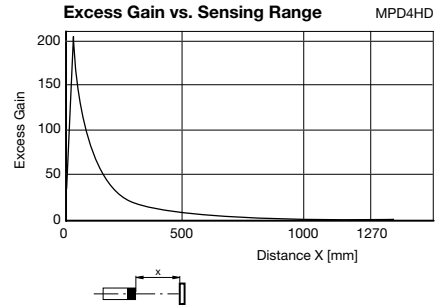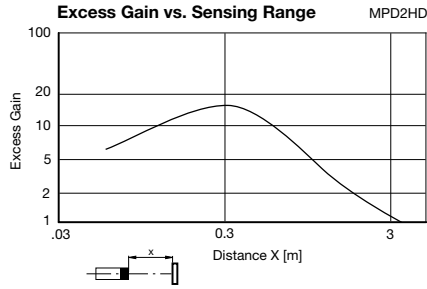




### Diffuse Scan Sensing Characteristics

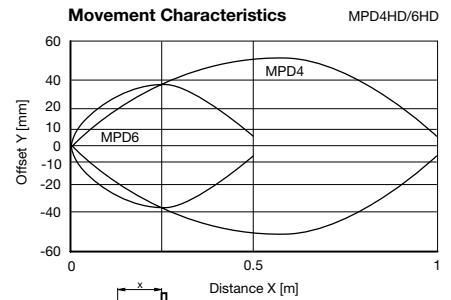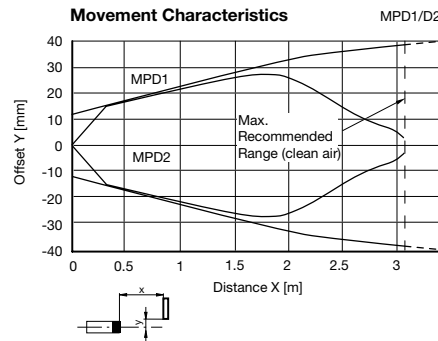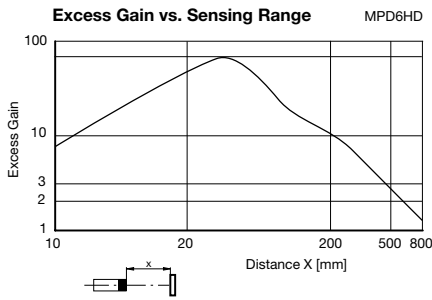

### Polarized Scan Sensing Characteristics

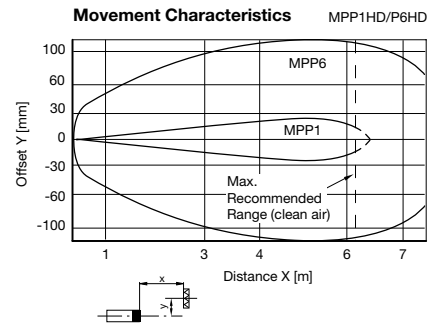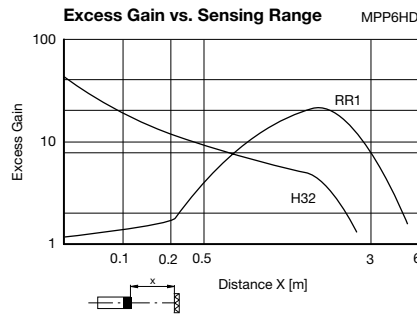
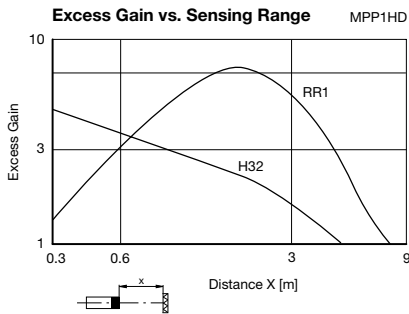


### Retro-Reflective Scan Sensing Characteristics

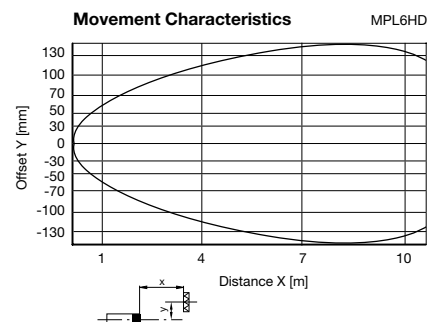
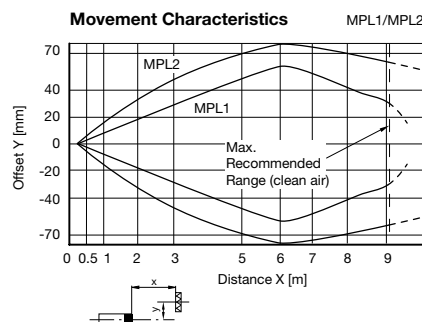
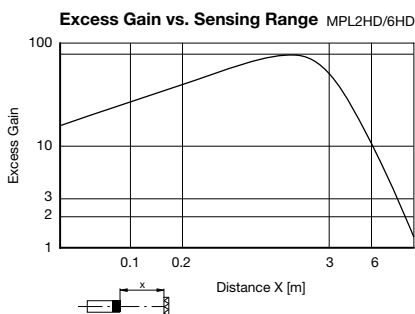


## Standard Head Sensing Characteristics

### Thru-Beam Scan Sensing Characteristics


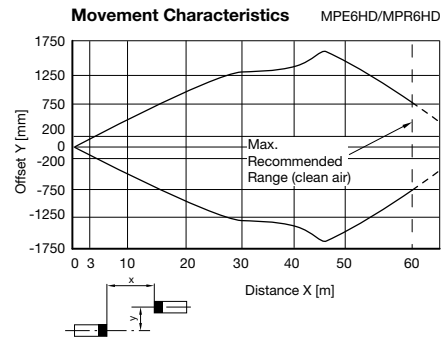
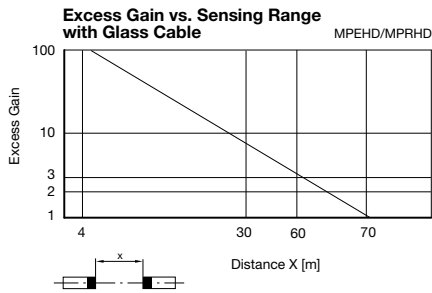


### Fiber Optic Sensing Characteristics

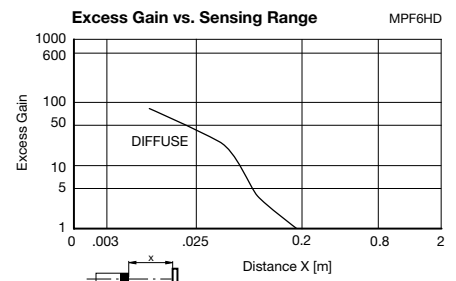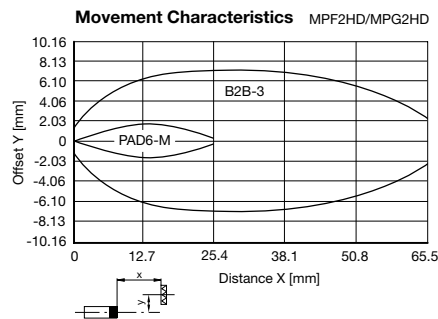
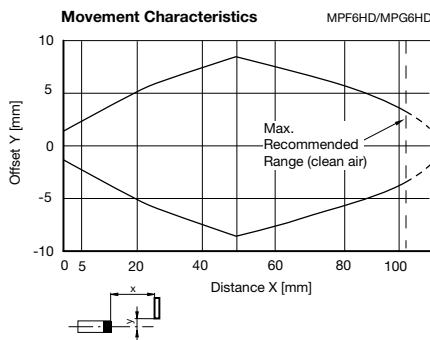


## 2-Wire AC Head Sensing Characteristics

### Diffuse Scan Sensing Characteristics

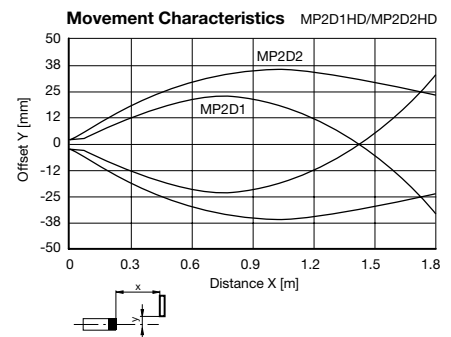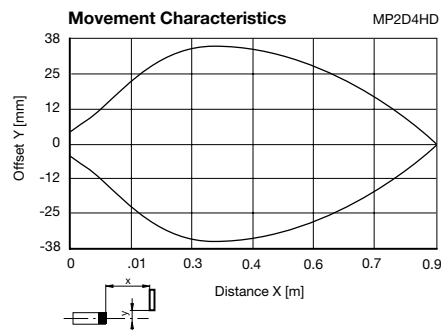
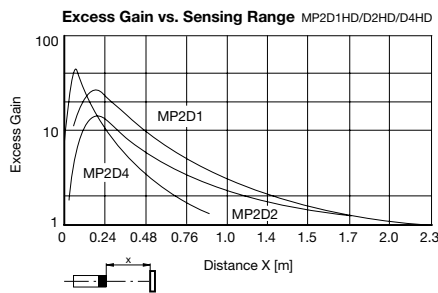


### Polarized Scan Sensing Characteristics

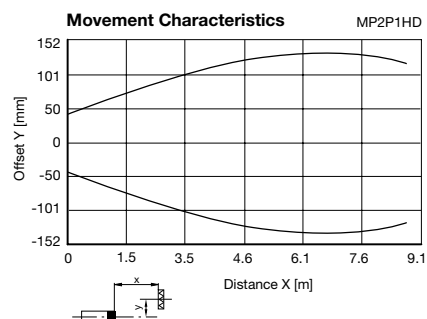
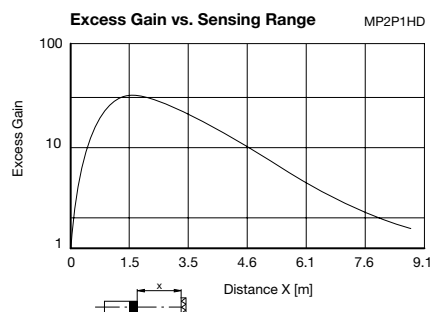


## 2-Wire AC Head Sensing Characteristics



### Retro-Reflective Scan Sensing Characteristics

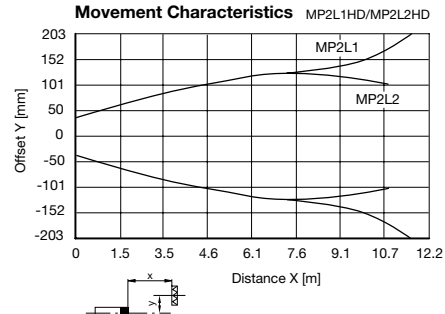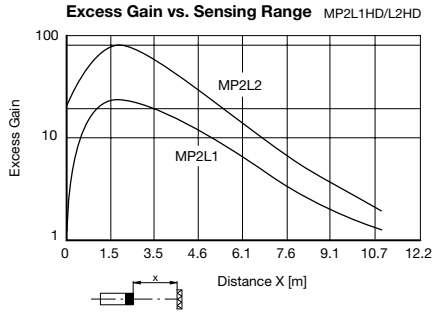

### Thru-Beam Scan Sensing Characteristics

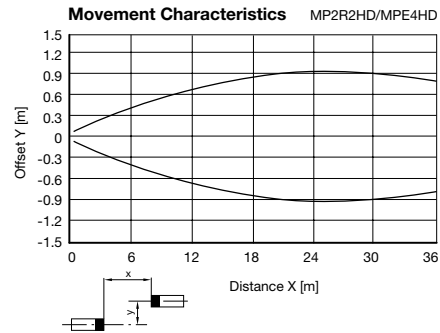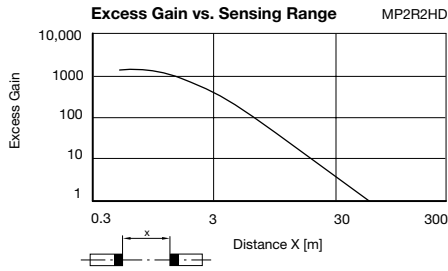

### Fiber Optic Diffuse Scan Sensing Characteristics

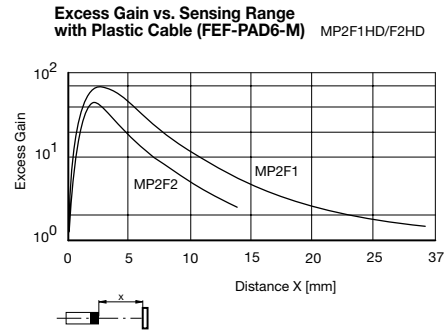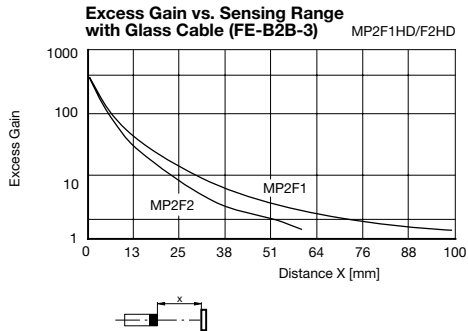


## Wiring Diagrams

### AC




#### Terminal Connection

Model: MPS10HD




Model: MPS11HD




NOTE: Pins 3 and 4 must be jumpered (jumper wire not included)

Model: MPS12HD




NOTE: Pins 3 and 4 must be jumpered (jumper wire not included)


Model: MPS13HD




Model: MPS17HD

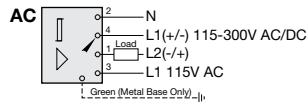


Model: MPV11HD




Model: MPV12HD




Model: MPV13HD



Model: MPSD11HD



Model: MP2S11HD

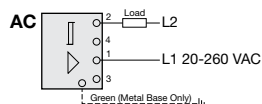


### DC




#### Terminal Connection


Model: MPS30HD




Model: MPS31HD




Model: MPS32HD




Model: MPS33HD



Model: MPV31HD



Model: MPS35HD




### AC/DC




#### Terminal Connection


Model: MPS16HD



Model: MPS18HD

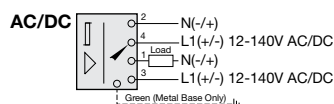

Model: MPV14HD




### AC




#### Cable Connection

Model: MPT10HD




Model: MPT11HD




NOTE: Relay also requires AC power


Model: MPT17HD



Model: MPW11HD



Model: MP2T11HD




### DC




#### Cable Connection


Model: MPT30HD




Model: MPT31HD



Model: MPT32HD



Model: MPT33HD




## Wiring Diagrams

### AC/DC



#### Cable Connection

Model: MPT16HD



### AC



#### Mini Quick Disconnect

Note: Wiring diagrams show quick disconnect pin numbers.


#### V93 Type

Model: MPT20HD




#### V95 Type


Model: MPT21HD



Model: MPT27HD



Model: MPW21HD



### AC/DC




#### Mini Quick Disconnect


Note: Wiring diagrams show quick disconnect pin numbers.

#### V95 Type

Model: MPT28HD



Model: MPB22

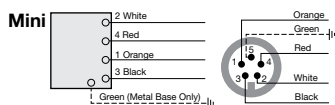

### DC




#### Mini Quick Disconnect


Note: Wiring diagrams show quick disconnect pin numbers.

#### V94 Type


Model: MPT41HD



Model: MPT42HD



Model: MPT43HD



### DC




#### Micro Quick Disconnect


Note: Wiring diagrams show quick disconnect pin numbers.

#### V1 Type


Model: MPT40HD-CM




Model: MPT41HD-CM




Model: MPT42HD-CM

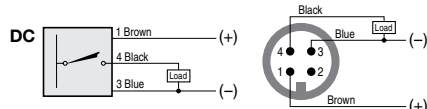

Model: MPT43HD-CM

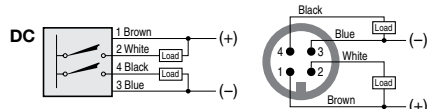


Model: MPB27

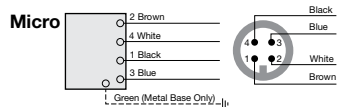


## Dimensions (mm)


### SENSOR HEAD, BASE AND RECEPTACLE DIMENSIONS

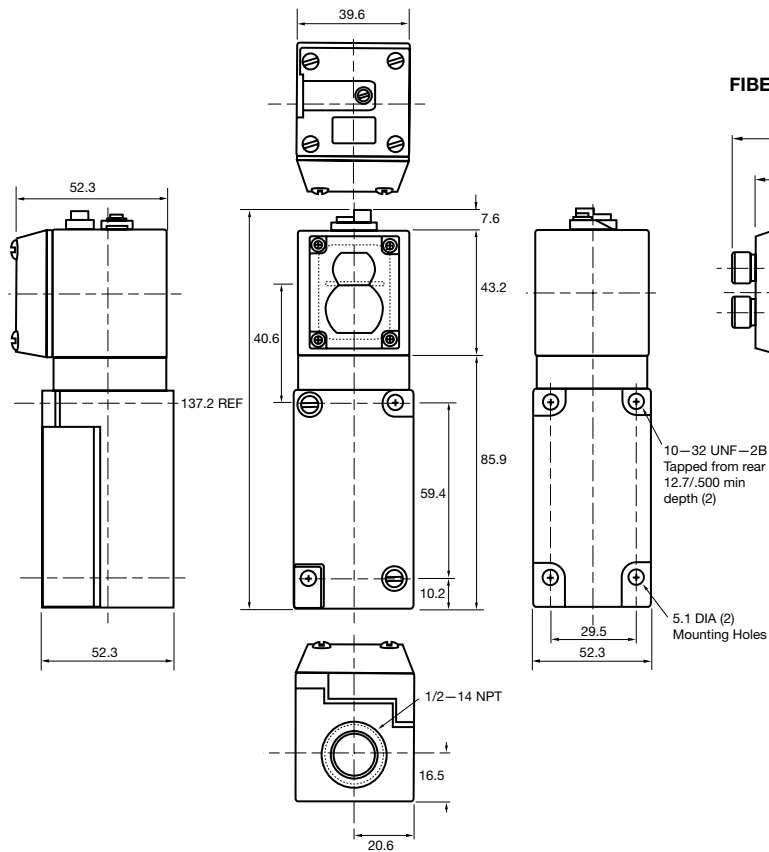


### FIBER OPTIC SENSOR HEAD DIMENSIONS

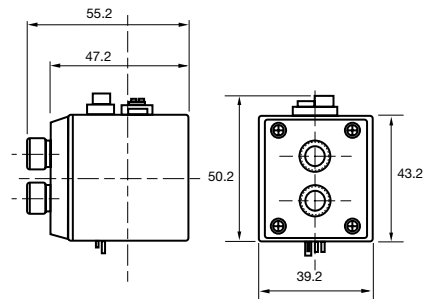


### SENSOR HEAD WITH MINI RELAY BASE DIMENSIONS

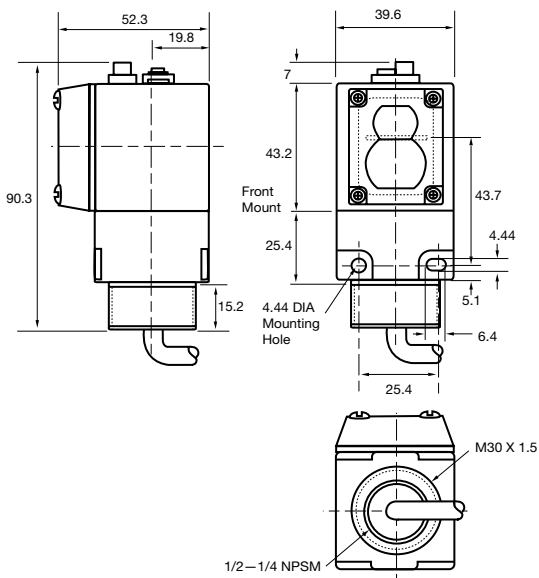

### QUICK DISCONNECT MINI BASE DIMENSIONS

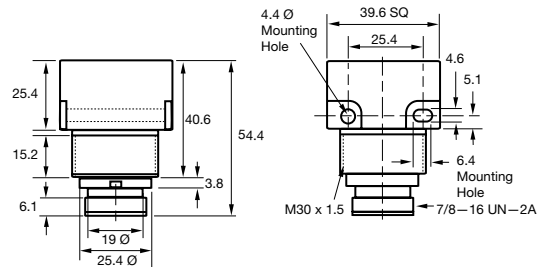

### QUICK DISCONNECT MICRO BASE DIMENSIONS

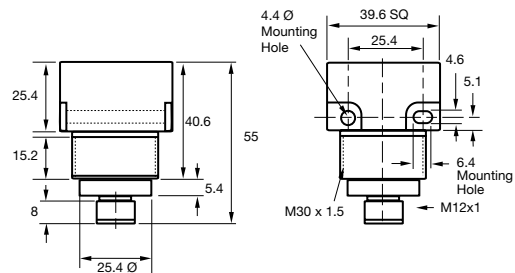

## MULTIFUNCTION TIMER/LOGIC CARD

### FOR A COMPLETE CONTROL

- Multifunction Time/logic Card
- Photoelectric Sensor Head
- Reflector (Retro and Polar Scans)

### CHOICE OF:

- Plug-in base
- Plug-in Receptacle
- Mini Base
- Relay Base



Multifunction Logic Cards

Model No.	Description
MPA1HD	0.15 to 15 sec. time adjustment
MPA155HD	1 to 30 sec. adjustment
MPA188HD	0.01 to 1 sec. adjustment

Plug-in timer/logic cards easily convert any ON/OFF MP Series photoelectric into a multifunction control. Seven DIP switches located on the timer card provide the user with a choice of seven delay functions including dual delay and motion detection. In addition, light operated or dark operated sensing can be selected by a switch located on the photoelectric sensor head.

### TIME DELAY OPTIONS

The timer/logic cards can be set up to modify the sensor's head output signal. For instance, in thru-scan or reflective scan (L.O. mode), if the logic card is set for OFF delay the sensor does not immediately turn off its output circuit after the beam goes dark or is blocked. Instead it waits until the beam has been dark for a preset time. If set for ON delay, the sensor waits for a preset to time to recognize that the beam is complete.

Each timer/logic card has seven DIP switches to select ON delay, OFF delay, or both. The delays range as shown in the Specifications and Order Guide. The cards also offer totally independent range selection and adjustment for ON and OFF delays.

### ONE SHOT OPTIONS

In addition, the timer/logic card offers four modes of operation: 1-shot, a delayed 1-shot, 1-shot drop, and a delayed 1-shot drop. The cards can be adjusted for both the width of the 1-shot pulse and the length of delay before the 1-shot is fired.


### TIMING OPTION SETTINGS

Prior to inserting a multifunction timer card into the photoelectric sensor head, you must properly set DIP switches located on the card. You must also set the L.O./D.O. switch located in the photoelectric sensor head.

### TIMING ADJUSTMENTS

On the top of the MP Series photoelectric sensor head is an access cover. When opened with a small blade screwdriver, the multi-turn timer adjustment screws, labeled "1" and "2," are exposed.

Clockwise rotation increases the time range(s). If a single delay option is selected, the other timer adjustment is automatically set to zero. When the sensor head has been set to the desired timing range(s), snap the access cover shut to provide proper head sealing.



## MULTIFUNCTION TIMER/LOGIC CARD


### Timing Options Settings

DIP switches on the card are labeled 1-7, with OFF position toward the labels. Refer to the timing chart below for DIP switch settings and their results for a retro-reflective or thru-beam setup.

Timing/Adjustment




T1 denotes screw adjustment 1

T2 denotes screw adjustment 2

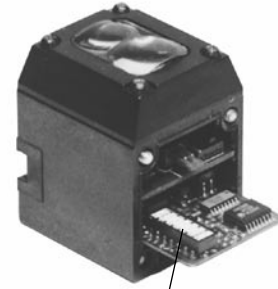

DIP SWITCHES 1-7

Output OPTION	DIP SWITCH	L.O./D.O. SWITCH	BEAM MAKE	BEAM BREAK	BEAM MAKE	BEAM BREAK	BEAM BREAK	OUTPUT STATUS
No Logic Card		L.O.						ON OFF
ON Delay	1 2 3 4 5 6 7	L.O.	T2			T2		ON OFF
OFF Delay	1 2 3 4 5 6 7	L.O.		T1			T1	ON OFF
ON/OFF Delay	1 2 3 4 5 6 7	L.O.	T2	T1		T2	T1	ON OFF
1-Shot	1 2 3 4 5 6 7	L.O.	T2			T2		ON OFF
1-Shot Drop	1 2 3 4 5 6 7	L.O.	T2			T2		ON OFF
Delayed 1-Shot	1 2 3 4 5 6 7	L.O.		T1 T2			T1 T2	ON OFF
Del. 1-Shot Drop	1 2 3 4 5 6 7	L.O.		T1 T2			T1 T2	ON OFF
No Logic Card		D.O.						ON OFF
ON Delay	1 2 3 4 5 6 7	D.O.		T2			T2	ON OFF
OFF Delay	1 2 3 4 5 6 7	D.O.	T1			T1		ON OFF
ON/OFF Delay	1 2 3 4 5 6 7	D.O.	T1	T2		T1	T2	ON OFF
1-Shot	1 2 3 4 5 6 7	D.O.		T2		T2	T2	ON OFF
1-Shot Drop	1 2 3 4 5 6 7	D.O.		T2		T2	T2	ON OFF
Delayed 1-Shot	1 2 3 4 5 6 7	D.O.	T1 T2			T1 T2		ON OFF
Del. 1-Shot Drop	1 2 3 4 5 6 7	D.O.	T1 T2			T1 T2		ON OFF
Motion Detector	1 2 3 4 5 6 7	L.O. or D.O.	Output ON with motion, OFF with no motion (T2 adj.)					
Motion Detector	1 2 3 4 5 6 7	L.O. or D.O.	Output OFF with motion, ON with no motion (T2 adj.)					

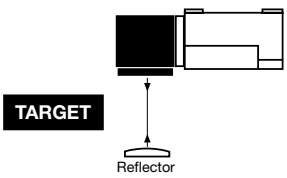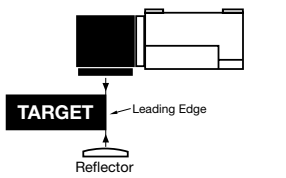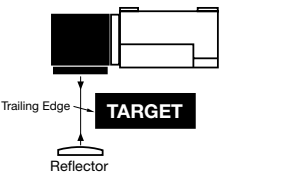				
		NO TARGET	TARGET PRESENT LEADING EDGE	TARGET GONE TRAILING EDGE
ON Delay	Dark On	Output is OFF	Output doesn't turn on until the time delay period has expired.	Output is OFF
	Light On	Output is ON	Output is OFF	Output doesn't turn back on until the delay period has expired.
OFF Delay	Dark On	Output is OFF	Output is ON	Output remains on for the amount of time set for the off delay. The output turns off when the delay period has expired.
	Light On	Output is ON	Output will not turn off until the time delay has expired.	Output turns back on.
ON/OFF Delay	Dark On	Output is OFF	Output doesn't turn on until the time delay period has expired.	Output doesn't turn back off until the time delay period has expired
	Light On	Output turns on after the time delay period has expired.	Output turns off after the time delay period has expired.	Output turns back on after the delay period has expired.
1-shot	Dark On	Output is OFF	The output turns on as soon as the target is present. The output will remain on only for the amount of time set.	If the time set for the output to turn on has not run out, the output will remain on. If the time set for the output to remain on expired while the target was still in front of the sensor and the output turned back off, the output will remain off.
1-shot Drop	Dark On	Output is ON	Output turns off only for the amount of time set. When that time expires, the output will turn back on.	If the time set for the output to turn off has not expired, the output will remain off. If the time set for the output to remain off expired while the target was still in front of the sensor and the output turned back on, the output will remain on.
	Light On	Output is ON	Output remains ON	Output turns off only for the amount of time set. When that time expires, the output will turn back on.
Delayed 1-shot	Dark On	Output is OFF	Output is OFF	Output turns on after the time delay period has expired. Output remains on only for the time period set, when that time expires the output will turn back off.
	Light On	Output is OFF	Output turns on after the time delay period expires. Output turns on only for the time period set. When that time expires, the output will turn back off.	Output remains off if the one shot time period has expired. If the one shot period hasn't expired, the output will remain on.
Delayed 1-shot Drop	Dark On	Output is ON	Output is ON	Output turns off after the time delay period has expired. Output turns off only for the time period set, when that time expires, the output will turn back on.
	Light On	Output is ON	Output turns off after the time delay period expires. Output turns on only for the time period set. When that time expires, the output will turn back on.	Output remains off if the one shot time period had expired. If the one shot period hasn't expired, the output will remain on.
		TARGET MOVING CONDITIONS	TARGET NOT MOVING CONDITIONS	
Motion Detector OFF with no Motion	Light or Dark On	Output is ON	Output is OFF	
Motion Detector ON with no Motion	Light or Dark On	Output is OFF	Output is ON	


## Accessories

(Dimensions in mm)



### Mounting Brackets

Optional mounting brackets (MPZB01 or MPZB02) can be provided that fit around the threaded portion of the mini base. The brackets allow the base to rotate 360°. A 30 mm mounting nut and lockwasher is included for securing the mini base to the bracket.

**MPZB01**

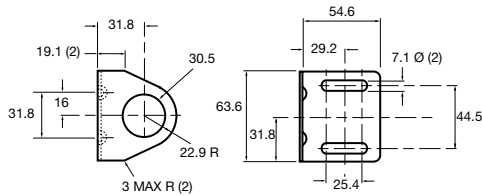


**MPZB02**

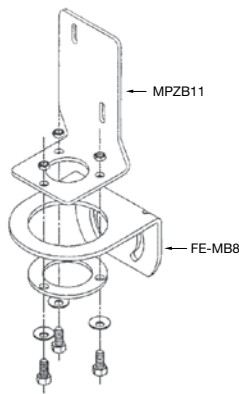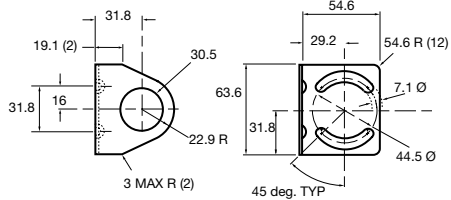

**MPZB12**

### Swivel Mounting Brackets

The basic ball and swivel mounting bracket (360° swivel 10° tilt) consists of two plastic brackets and the spherical plastic swivel nut. The swivel nut has M30 threading for direct installation of the MPT (mini MP base), including the quick disconnect versions. The bracket (MPZB06) can be directly mounted to a surface, or the MPZB07 mounting plate may be used. The MPZB08 adapter allows you to connect the ball and swivel bracket to the MP relay (MPV) and MP plug-in bases (MPS).

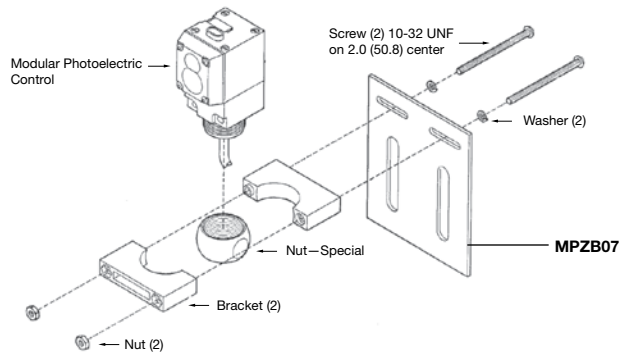

**Exploded View of MPZB06**

### Mounting Brackets

Model No.	Description
<b>MPZB01</b>	Mini MP mounting bracket, vertical slots
<b>MPZB02</b>	Mini MP mounting bracket, circular slots
<b>MPZB06</b>	Ball and swivel mounting bracket (fits 30mm mini MP)
<b>MPZB07</b>	Ball and swivel vertical mounting plate
<b>MPZB08</b>	Adapter (use with MPZB06 to fit 1/2" conduit hole)
<b>MPZB12</b>	Photoswitch 4000 (MLS8C) to limit switch style (combination of the MPZB11 and FE-MB8)
<b>MPZB14</b>	Combination of the MPZB06 and MPZB07 bracket

### Other Accessories

Model No.	Description
<b>MPZFOADPT</b>	Pair of fiber cable adapters allows use of cuttable 1000 micron plastic cable
<b>MPZN01</b>	Mini base steel mounting nut and lockwasher
<b>MPZN02</b>	Mini base plastic mounting nut and lockwasher
<b>MPGKITC</b>	Pair of cable end tips and accessories for universal cables
<b>MPZR01</b>	Replacement relay for MPV series—6A SPDT
<b>MPZR02</b>	Replacement relay for MPSD series—5A DPDT

