


FEEL

2-in-1 room sensor

Scan or click to
discover product in
details



Nexelec

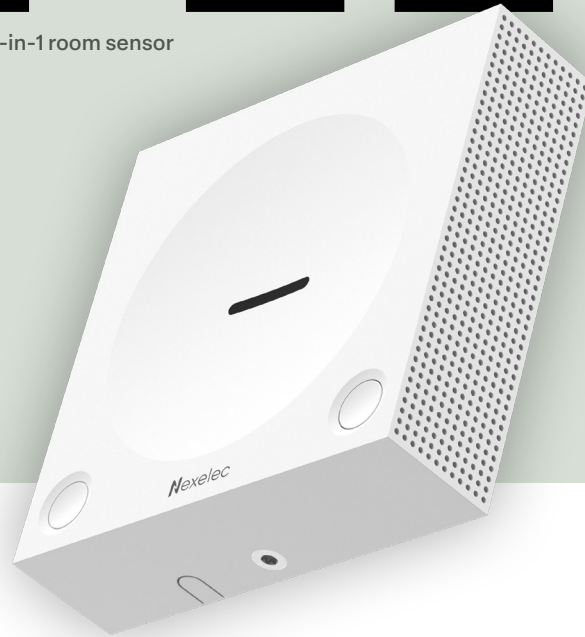

Connected



Remote reading of measurements. All information is available in a secure cloud space

Temperature / Humidity



For better indoor comfort. Measures ambient parameters in offices or homes



Temperature



Humidity

Design

Facilitates product acceptance by occupants

High-performance battery

Operates on replaceable lithium batteries. Up to 20 years⁽¹⁾ of autonomy

Calibration certificate

Accuracy of temperature and humidity measurements validated by an accredited metrology laboratory

Anti-tear detection


Triggers an alert message if the product is removed from its mounting base

Easy to configure

Easy product adjustment via contactless NFC technology from a smartphone

Instantaneous measurement

Easy to operate, thanks to a button on the front of the sensor. Useful for occupants or technicians (function can be deactivated)

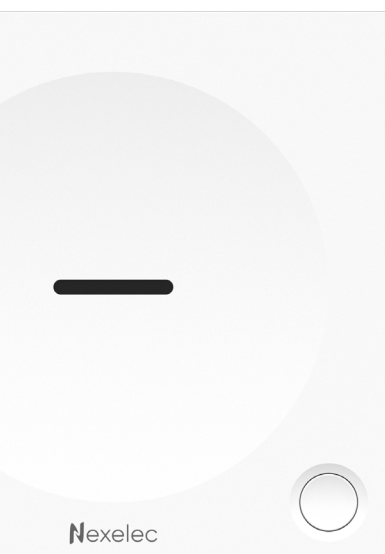

FEEL

2-in-1 room sensor

Nexelec

www.nexelec.eu

Reference

X580LS

X580LR

Radio

LoRaWAN - Sigfox

LoRaWAN



Various protocols and radio zones available.
Click or scan this QR Code to select the appropriate reference.

87 mm

23 mm



87 mm

Net weight: 150 g (including battery)

FUNCTIONS



Anti-theft protection

Lockable mounting base
reduces risk of sensor removal



Easy to install

Free-standing on desk, wall or
flush-mounted box. Adhesive
mounting included



270° Air

Numerous side openings for better
ambient air analysis



Insect barrier

Product-integrated pest screen



Reliable data transmission

Transmission modes adapted
to every need, with redundant
transmissions for high availability
of critical data



Enhanced cyber security

Data transmitted by the
product is secured from end
to end using double AES128
encryption

FEATURES



Temperature

Res.: 0.1°C

Prec.: ±0.2°C

Measuring range: -30°C - +70°C



Humidity

Res.: 0.5% R.H.

Prec.: ±2% R.H.

Measuring range: 0 - 100% R.H.



Connectivity*



Power supply

2 battery slots

Conditions of use

Indoor environment

Temperature: -20°C to +50°C

Humidity: 0% RH to 99% RH (non-
condensing)

Mounting type

Wall-mounted or free-standing

Warranty⁽²⁾

2 years

Box content

1 sensor

1 battery included (an additional
battery can be added to double the
product's autonomy)

1 mounting base

2 nylon screws and plugs

1 3M® adhesive fastener

Certification*



Mostly recyclable
product

Data transmission mode

Periodic

Grouped data (datalog) with
transmission redundancy

⁽¹⁾ Battery life is not guaranteed and may vary according to settings and product use. ⁽²⁾ Please refer to the information available on www.support.nexelec.fr *Available according to reference