



|   |  |  |  |   |  |                  |  |
|---|--|--|--|---|--|------------------|--|
| <b>RoHS Compliant</b>   |  | DIMENSIONS ARE IN INCHES [MILLIMETERS]   |  | NAME  |  | DATE             |  |
| THIRD ANGLE PROJECTION   |  | TOLERANCES:<br>FRACTIONAL ±<br>ANGULAR: MACH ± 3 Degrees<br>TWO PLACE DECIMAL ± .015 [.381]<br>THREE PLACE DECIMAL ± .010 [.254] |  | DRAWN   |  | 10/19/2022       |  |
| DO NOT SCALE DRAWING  |  |  |  | CHECKED   |  |                  |  |
| <b>PROPRIETARY AND CONFIDENTIAL</b><br>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED. |  | MATERIAL:<br>.004" [.101] BeCu ALLOY 25, 1/2 HARD  |  | ENG APPR.   |  |                  |  |
|   |  | FINISH:  |  | MFG APPR.   |  |                  |  |
|   |  | WEIGHT: .550 oz [13.970]   |  | Q.A.  |  |                  |  |
|   |  |  |  | COMMENTS:   |  |                  |  |
|   |  |  |  |  |  |                  |  |
|   |  |  |  |   |  |                  |  |
|   |  |  |  | SIZE <b>A</b> DWG NO. <b>24B13-BFA024000T</b>   |  | REV. <b>01</b>   |  |
|   |  |  |  | SCALE: 1:1  |  | CAGE CODE: 57DU2 |  |
|   |  |  |  | SHEET 1 OF 1  |  |                  |  |

# HOW TO ORDER FINGER-STOCK GASKETS

The chart below is an easy-to-use reference on how Orbel finger-stock gasket part numbers are created and used to order standard and custom gaskets. Custom configurations that fall outside of our standard gasket styles are also available.

## Sample Part Number: 30B09-BFA024000T

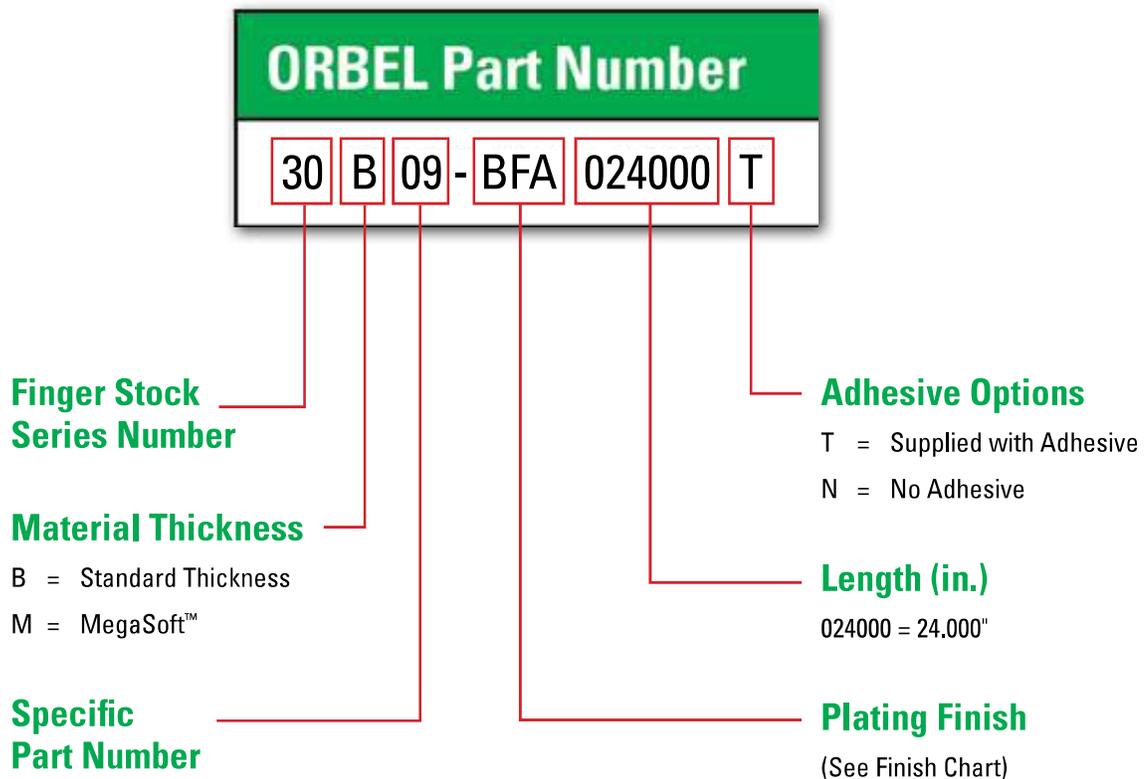

| PLATING FINISHES                               |             |                        |             |
|--|-------------|------------------------|-------------|
| Finish Type                                    | Finish Code | Finish Type            | Finish Code |
| SILVER   | AGA         | NICKEL, ELECTROLESS    | NIP         |
| GOLD .000050" MIN                              | AUA         | TIN/LEAD 90/10, MATTE  | PBA         |
| GOLD .000050" MIN with NICKEL FLASH UNDERPLATE | AUK         | TIN/LEAD 60/40, MATTE  | PBB         |
| BRIGHT FINISH, UNPLATED                        | BFA         | TIN/LEAD 90/10, BRIGHT | PBC         |
| BRIGHT FINISH, SOLDERABLE                      | BFS         | TIN/LEAD 60/40, BRIGHT | PBD         |
| CADMIUM + CLEAR CHROMATE                       | CDA         | TIN, BRIGHT            | SNA         |
| CADMIUM + YELLOW CHROMATE                      | CDB         | TIN, MATTE             | SNB         |
| NICKEL, BRIGHT                                 | NIA         | ZINC + CLEAR CHROMATE  | ZNA         |
| NICKEL, MATTE OR SULFAMATE NICKEL              | NIB         | ZINC + YELLOW CHROMATE | ZNB         |

All plating thicknesses are .0001" min. except where noted.