

2J2124B-C681N

CELLULAR / LTE Connector Mount

Key Features

CELLULAR / LTE

- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 Mhz

Screw Mount

N-Female Standard

Ground Plane Independent

Dimensions 244 × Ø 22 (Ø 16) mm



1. Antenna and electrical specifications

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-11.5	~-14.2	~-9.2
VSWR	~1.8:1	~1.5:1	~2.0:1
Efficiency (%)	~55	~58	~71
Peak Gain (dBi)	~0.3	~1.7	~2.3
Average Gain (dB)	~-2.7	~-2.4	~-1.5
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	N-Female Standard		

Antenna Measurement Conditions:



Free Space



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2J2124B-C681N
Mounting Type	Screw Mount
Dimensions (mm)	244 × Ø 22 (Ø 16)
Radome	ASA
Radome color	Black or White
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

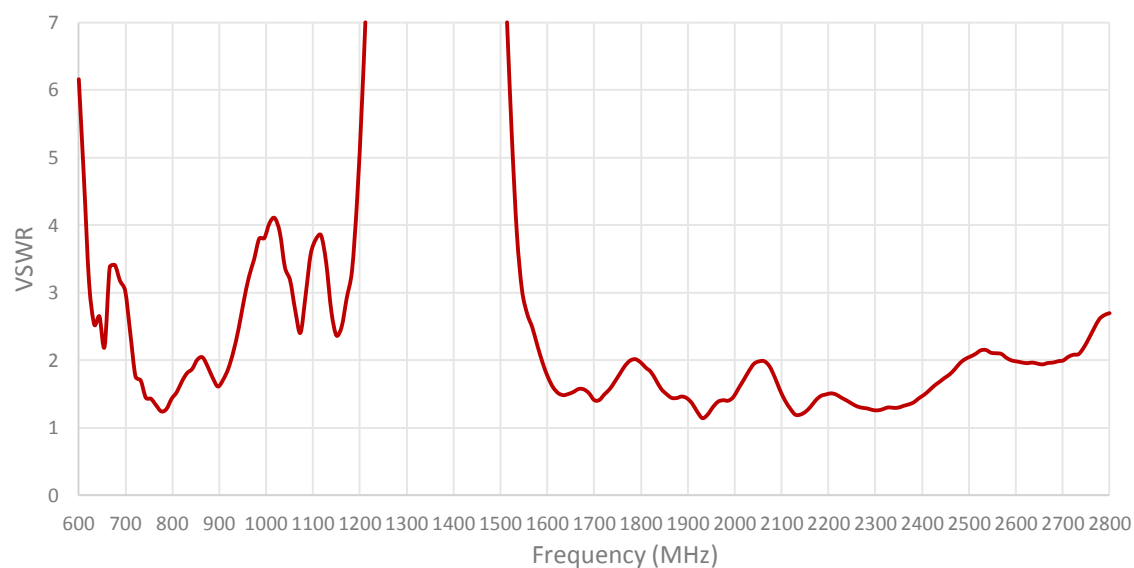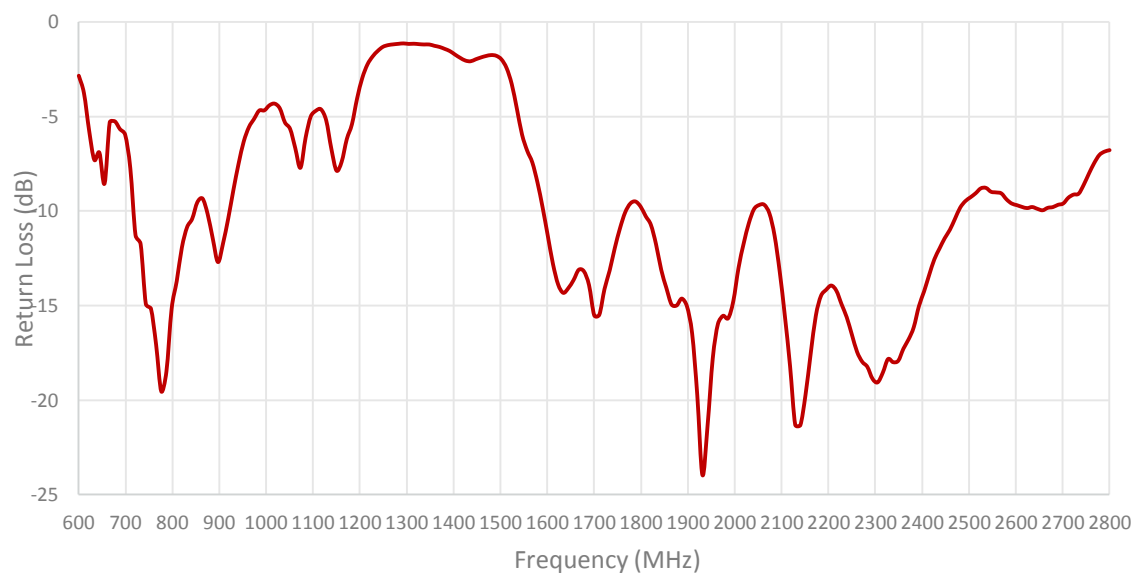

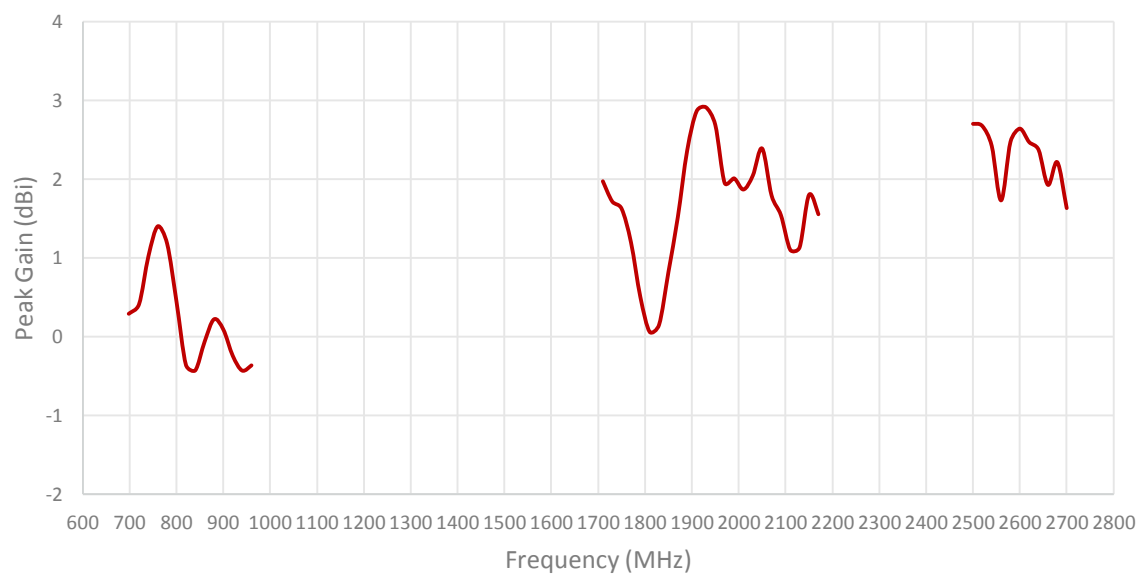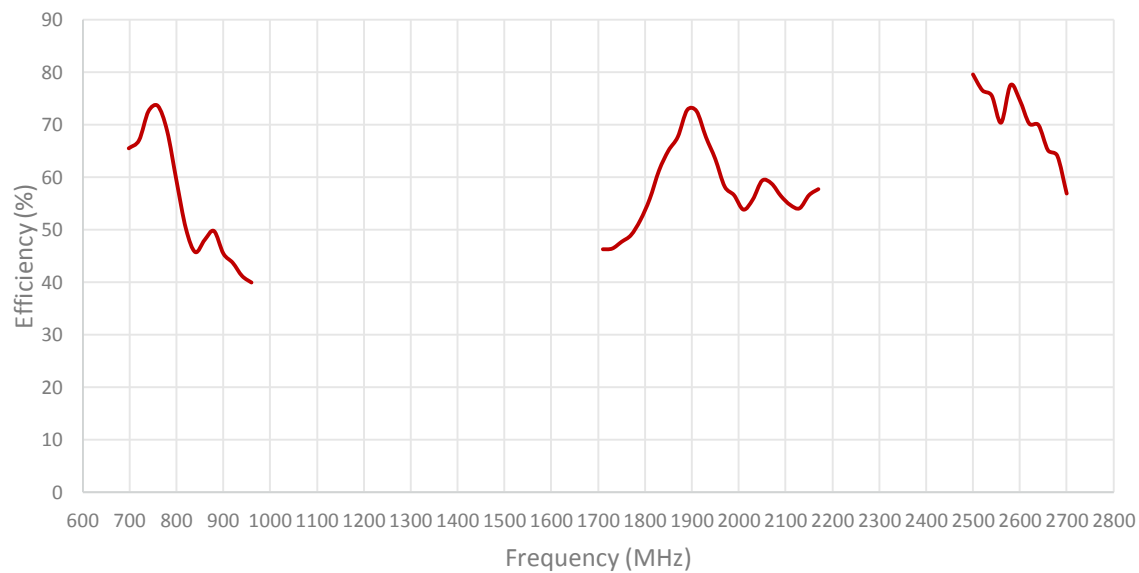


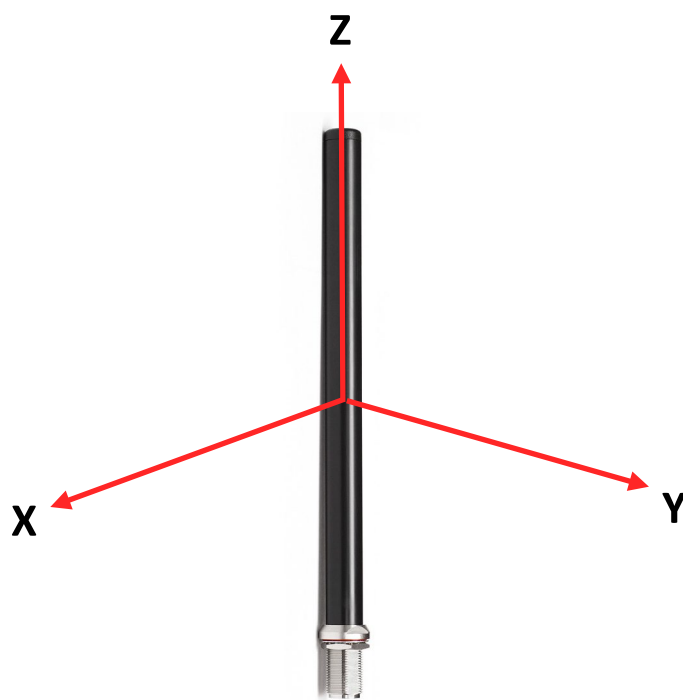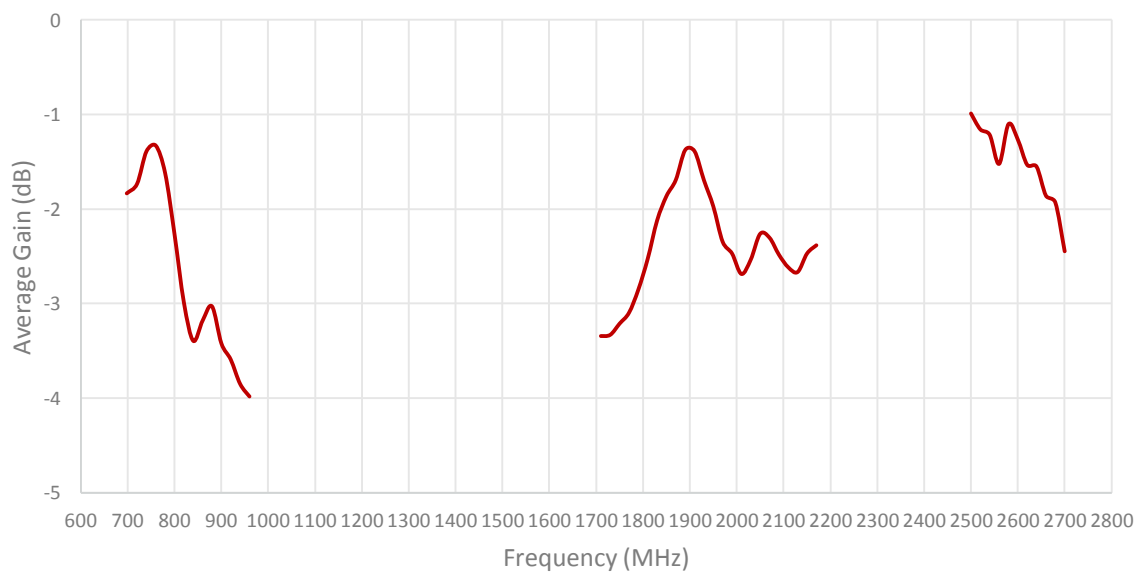


Radiation pattern reference

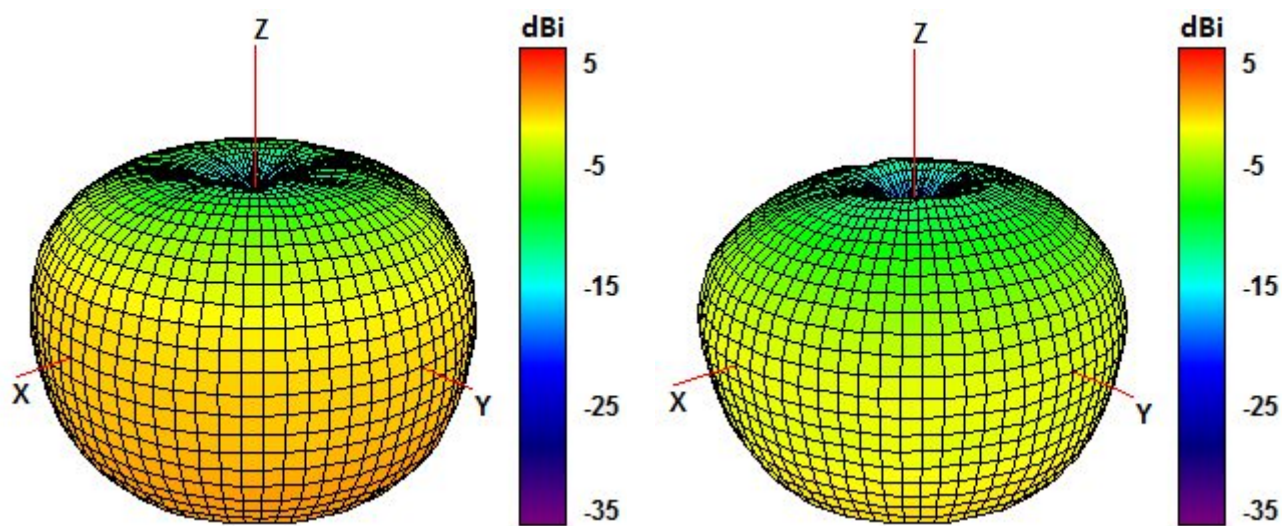


750 and 850 MHz Radiation pattern

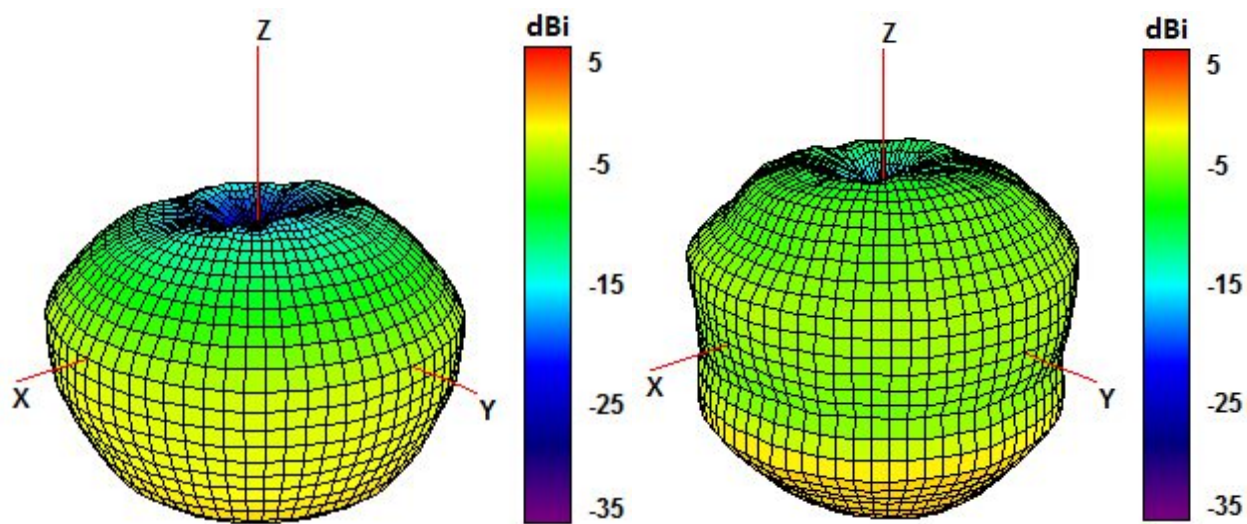

940 and 1750 MHz Radiation pattern


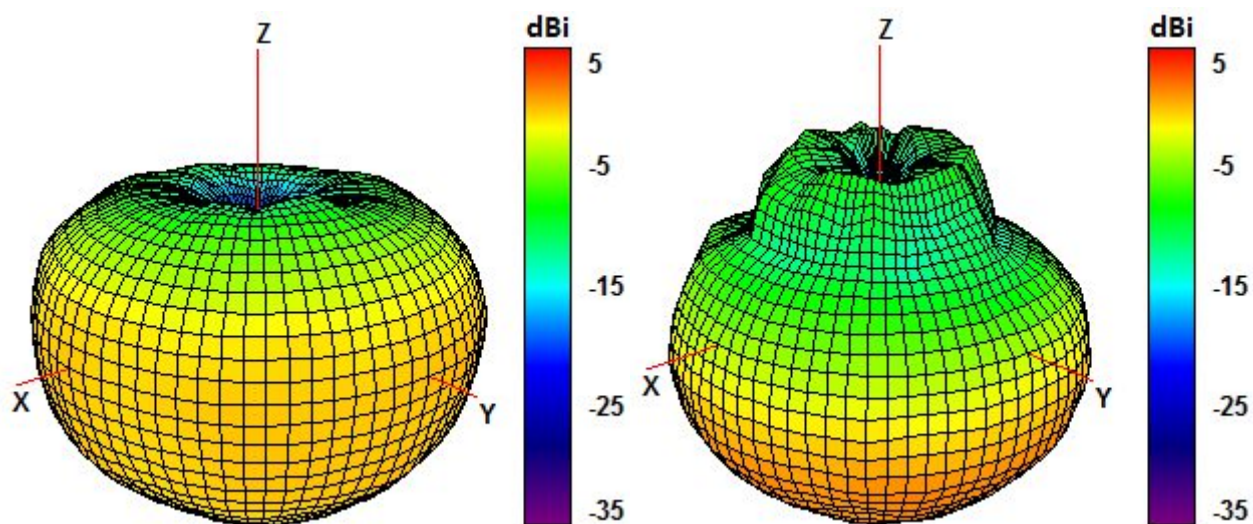


1850 and 1950 MHz Radiation pattern

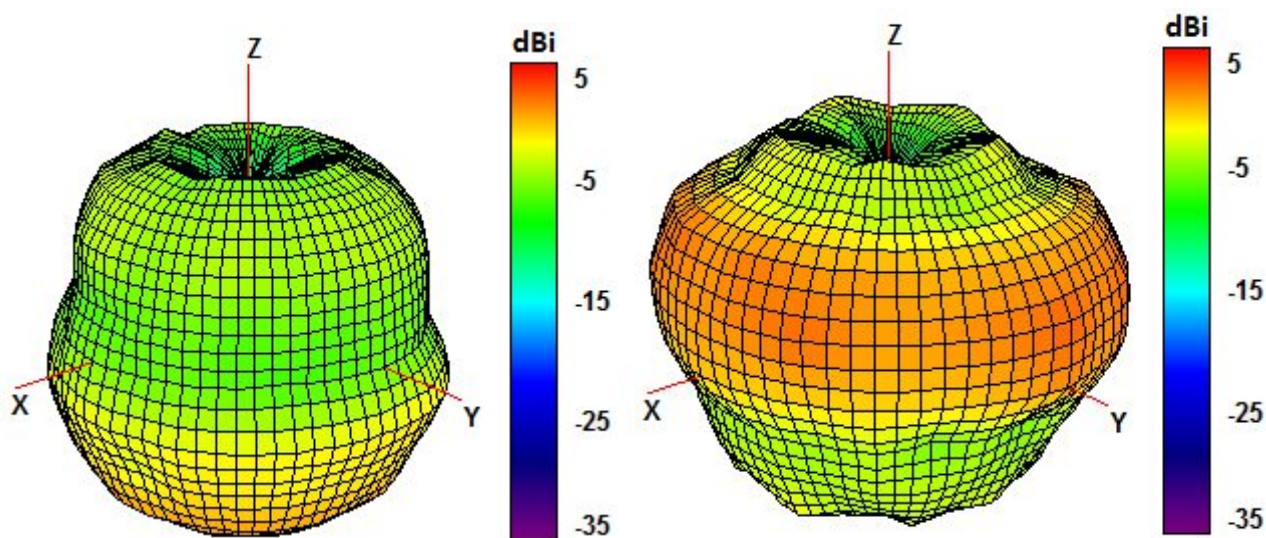


2100 and 2600 MHz Radiation pattern

4. Antenna drawings

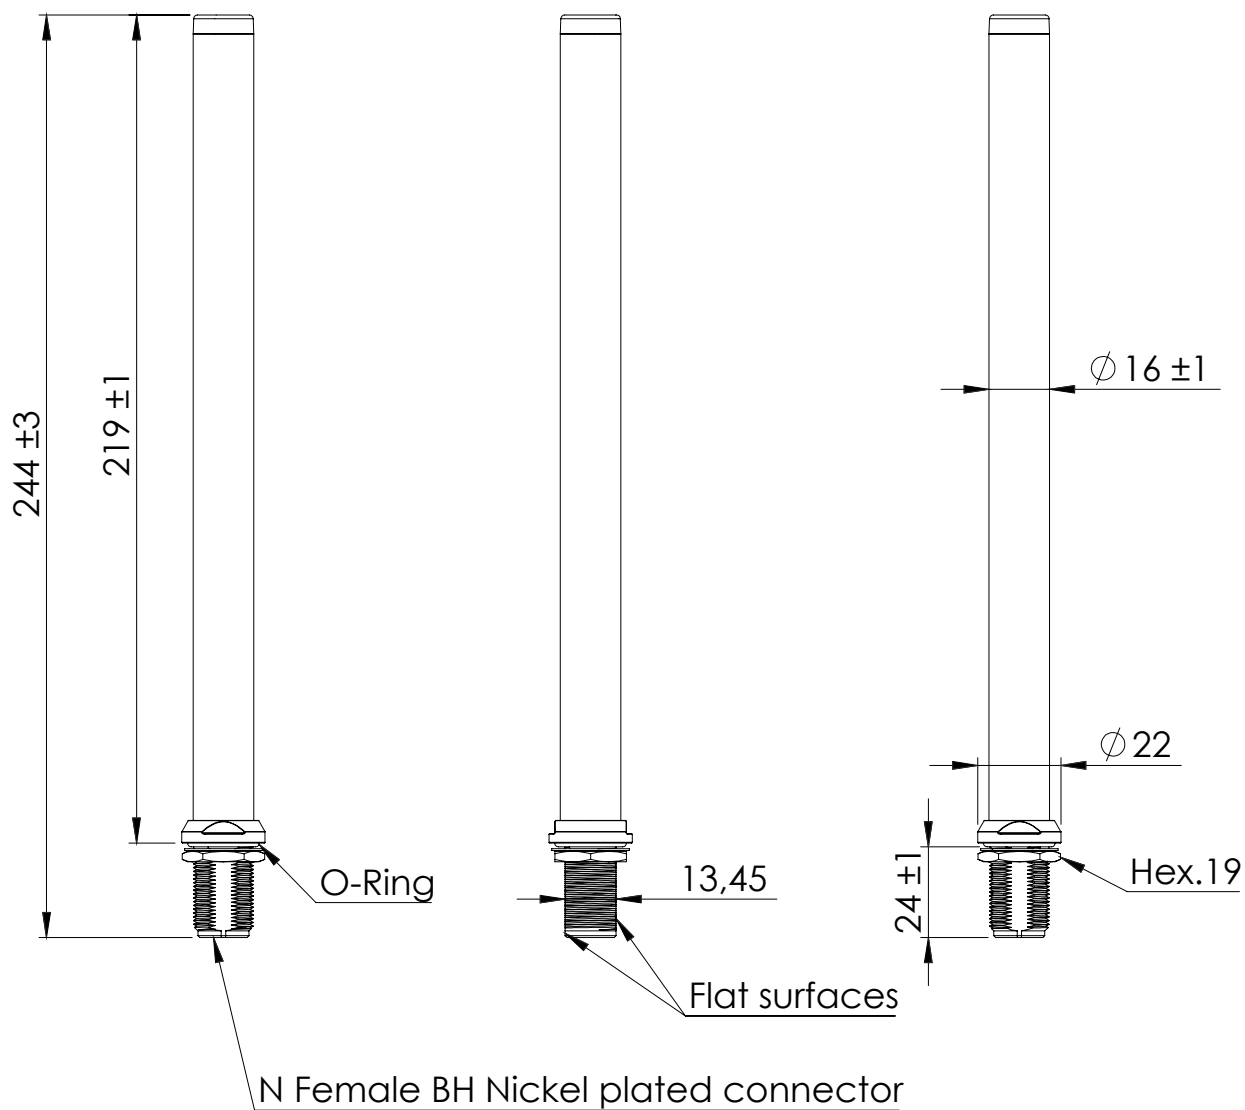

Mounting Holes:

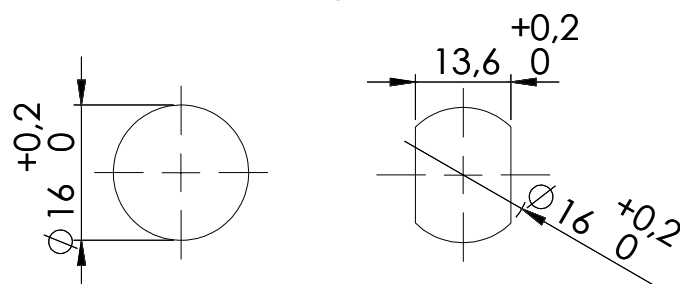

Mounting torque: 0,5 - 0,6Nm

5. Antenna Images

