

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples



Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant



Features

- Frequency Range: 0.8 – 4.0 GHz
- 0.70 dB Typ. NF
- Tunable Noise match
- 20 dB Gain
- 13dBm Nominal P1dB
- On-chip DC Blocks
- 10-70mA Tunable Bias current
- 0.15-um InGaAs pHEMTs Technology
- 16-Pin QFN Plastic Package: 3mm x 3mm x 1mm


Applications

- Cellular Macro and Micro Base Stations
- L and S Band Ultra Low Noise Receivers
- Cellular repeaters, DAS and RRH/RRUs
- TDD or FDD systems

Product Image

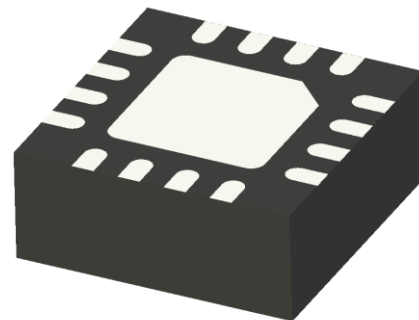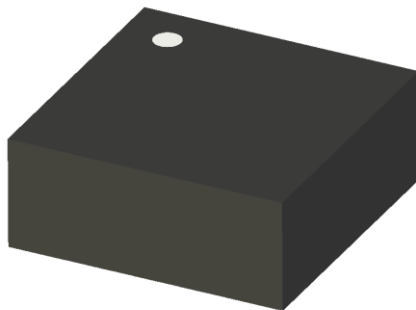

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Functional Diagram

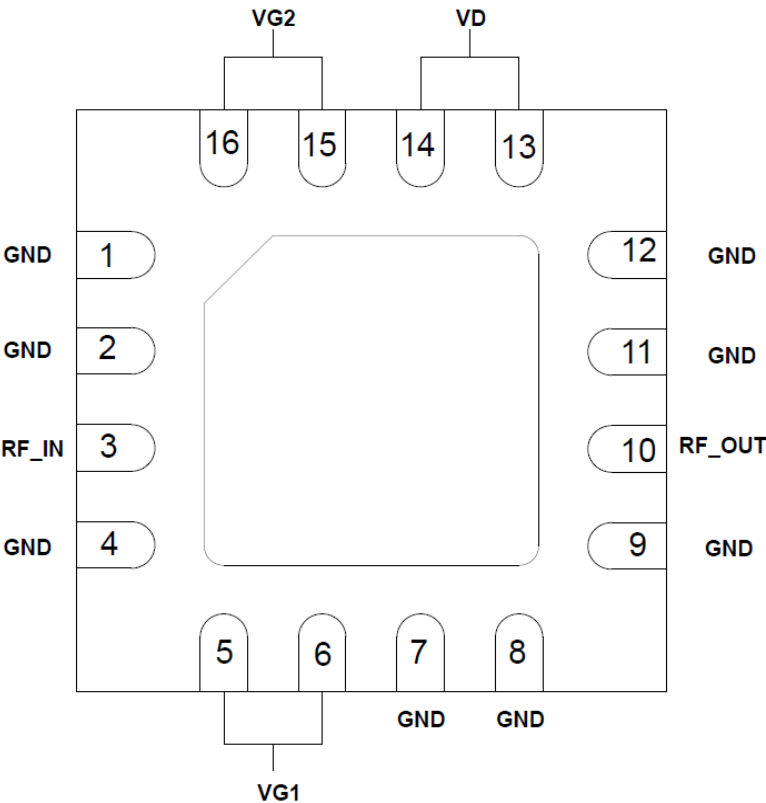

Absolute Maximum Ratings

Parameter	Absolute Maximum	Units
Positive DC voltage	7	V
RF Input power	23	dBm
Supply Current	100	mA
Operating Temperature	-55 to +85	°C
Storage Temperature	-65 to +150	°C

1. Operation beyond these limits may cause permanent damage to the component.

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples



Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Electrical Specifications

Parameters Description		Frequency									Unit
		800	900	1280	1575	1800	1900	2170	2400	2700	MHz
Gain		22	22.5	21	20.5	20	20	20	20	20	dB
Noise Figure		0.9 (1.2)	0.75 (0.9)	0.7	0.7	0.7	0.7	0.7	0.7	0.65	dB
Input Return Loss		-5.5 (-10.5)	-2.7 (-10)	-11.5	-10	-12.5	-14	-13	-17	-13	dB
Output Return Loss		-7.5	-7.8	-11.5	-17	-20	-20	-17	-16	-11	dB
Reverse Isolation		-44	-43	-40	-39	-39	-38	-37	-36	-36	dB
P1dB		13	13	13	13	13	13	13	13	13	dBm
OIP3		22	22	22	22	22	22	22	22	22	dBm
Supply Current		50	50	50	50	50	50	50	50	50	mA
Turning inductor value	@ Vg	16 (12.4)	16 (12.4)	5.6	3.6	1.4	1.4	1.4	1.6	1.6	nH
	@Vd	6.8	6.8	6.8	6.8	4.3	4.3	4.3	0	0	
Turning inductor Part No.	@ Vg	MCI Gold Coil	MCI Gold Coil	0603C S5N6X GL	0603C S3N6X GL	0603C S1N8X GL	0603C S1N6X GL	0603C S1N6X GL	0603C S1N6X GL	0603C S1N6X GL	-
	@Vd	0603C S6N8X GL	0603C S6N8X GL	0603C S6N8X GL	0603C S6N8X GL	0603C S6N8X GL	0603C S5N6X GL	0603C S5N6X GL	0	0	-

@Ta = 25°C, Zo = 50Ω; Vd = +5V, Vg1 = 0.3V, Vg2 = +2.5V

NOTES:

1. Specs in brackets correspond to Inductor values shown in brackets.
2. Estimated performance.
3. The supply current is tunable between 10-70mA with minor variation in RF Performance

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples



Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Ordering Information

Part Number	Description
ALND-WB-0008	0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier Packing: Bulk



5101 Hidden Creek Ln Spicewood TX 78669

Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 12-02-24

ABRACON IS
ISO9001-2015
CERTIFIED

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples






Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Product Dimensions

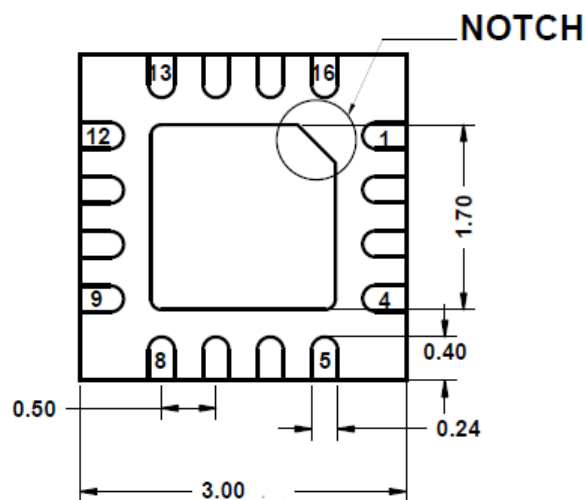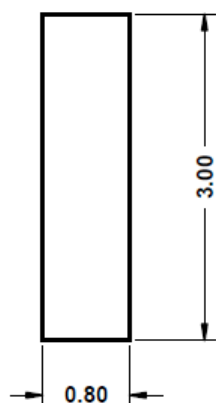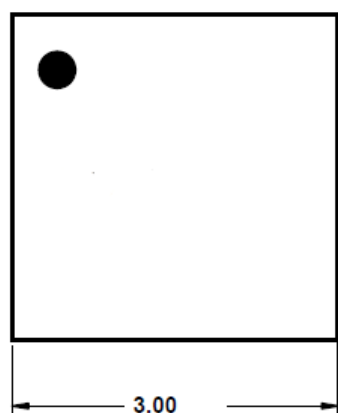

Unit: mm

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples



Check Inventory




3.0 x 3.0 x 1.0 mm
RoHS Compliant

Test Fixture Data

1.8-2.17 GHz Applications


(Turning Inductor Values @Vg1=1.4nH, @Vd=4.3nH)

Input Return loss

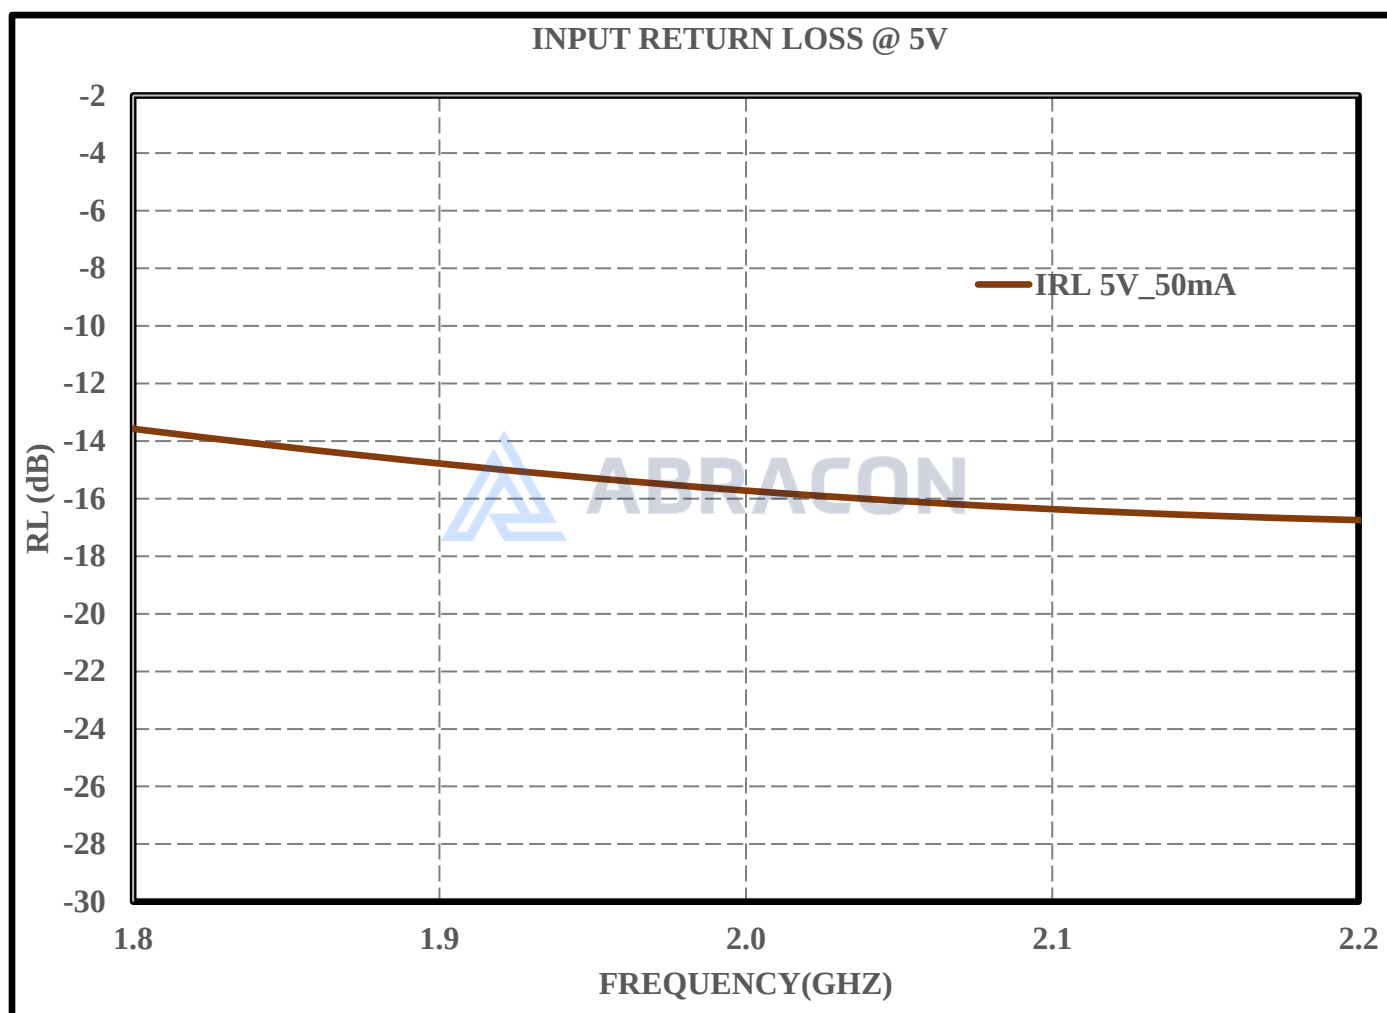

Vd = +5V, Vg1 = -0.3, Vg2 = +2.5V, Total Current = 50mA, Ta = 25°C

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Output Return loss

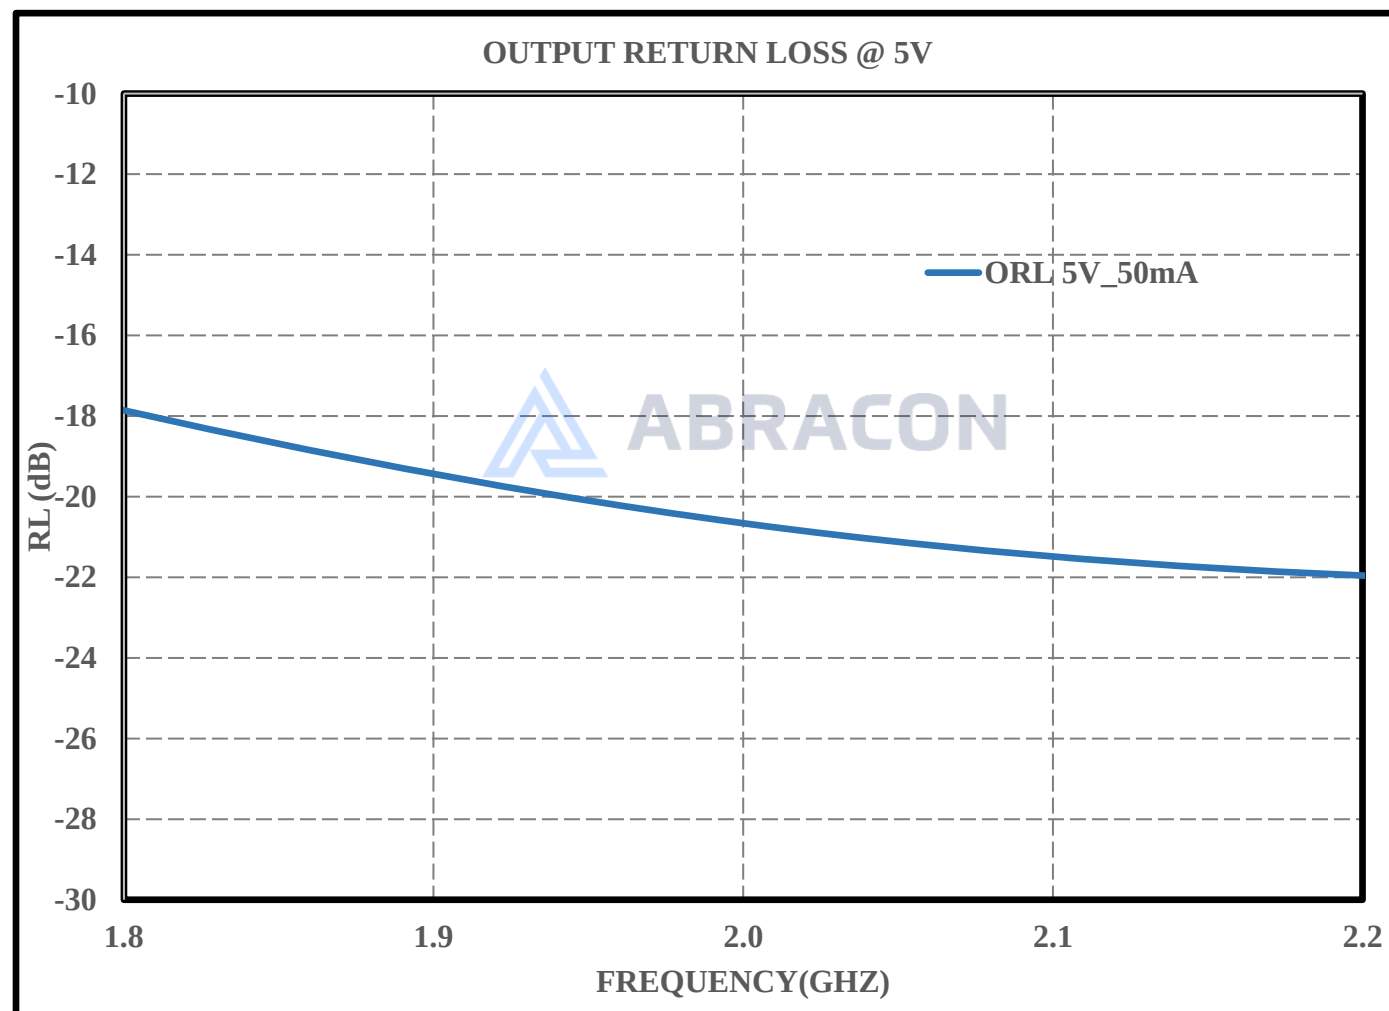

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Gain

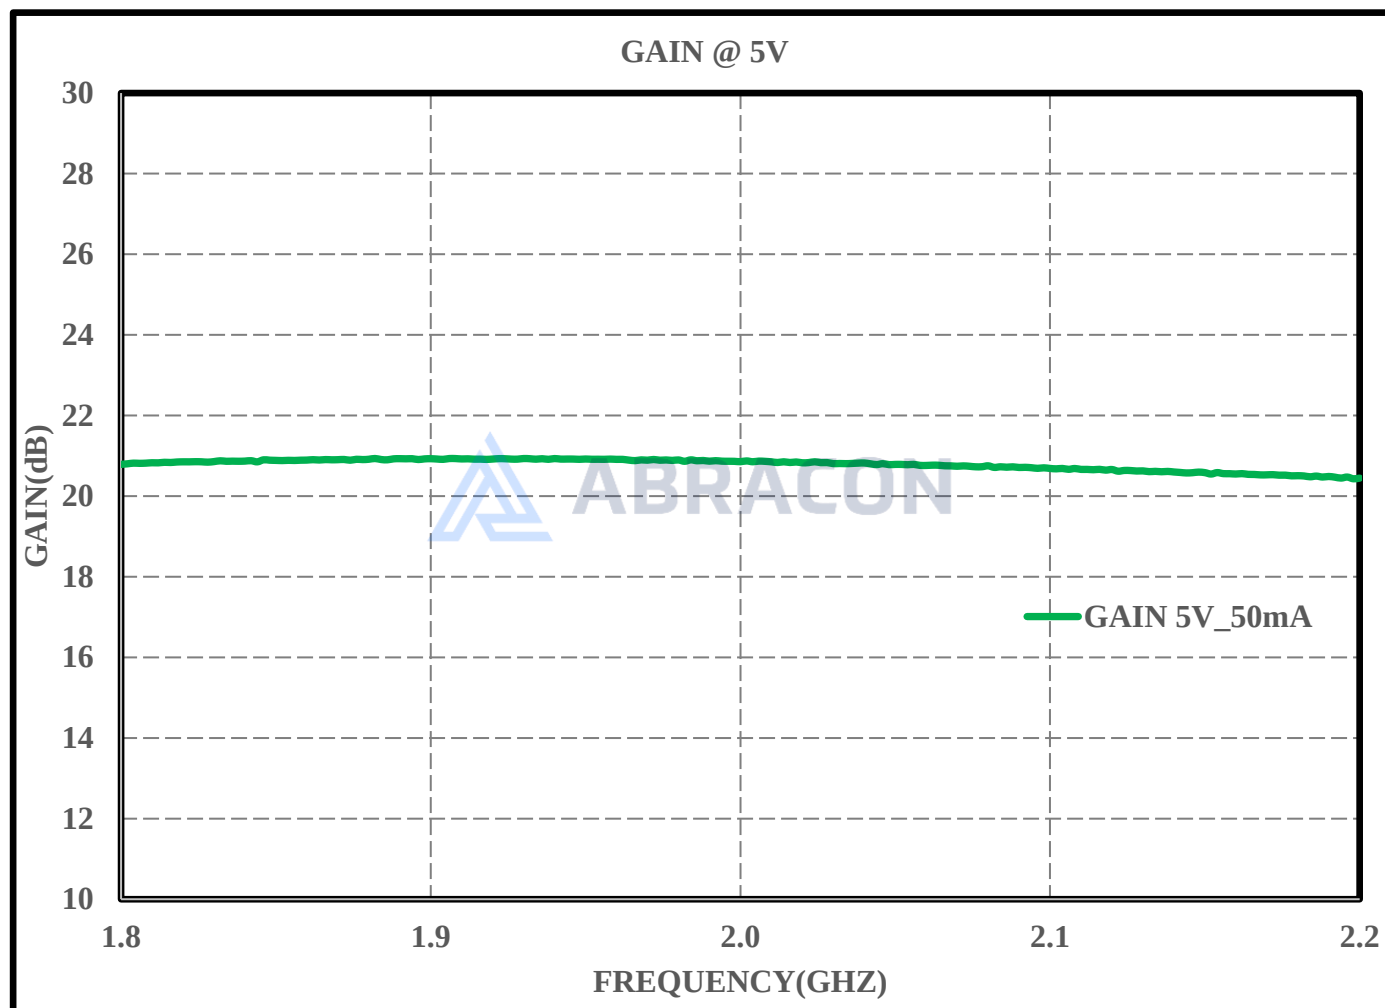

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Isolation

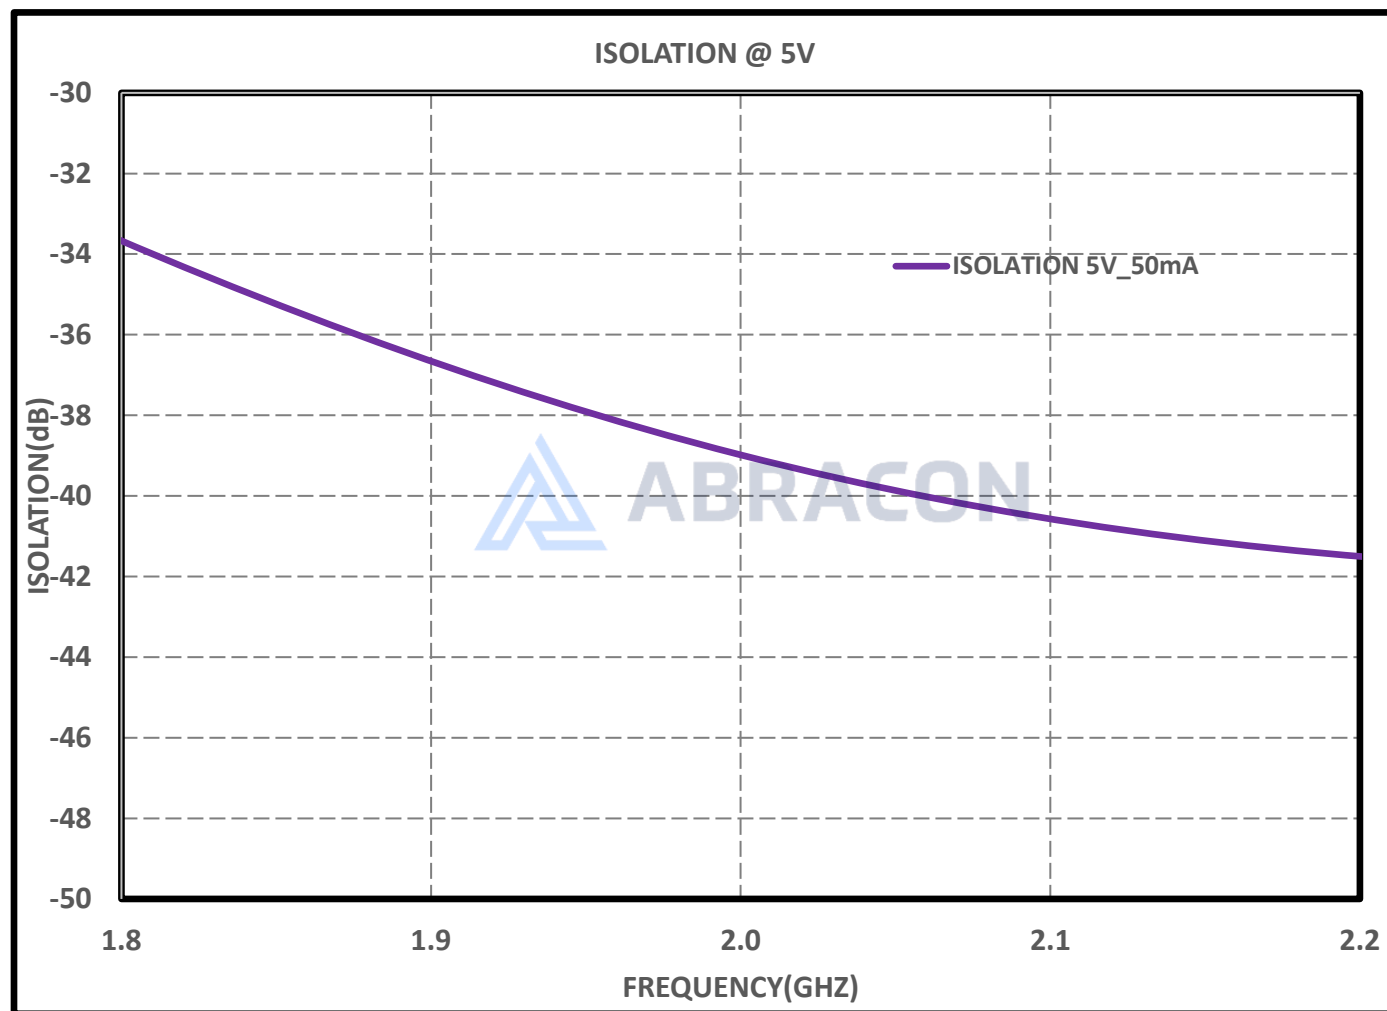

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

OIP3

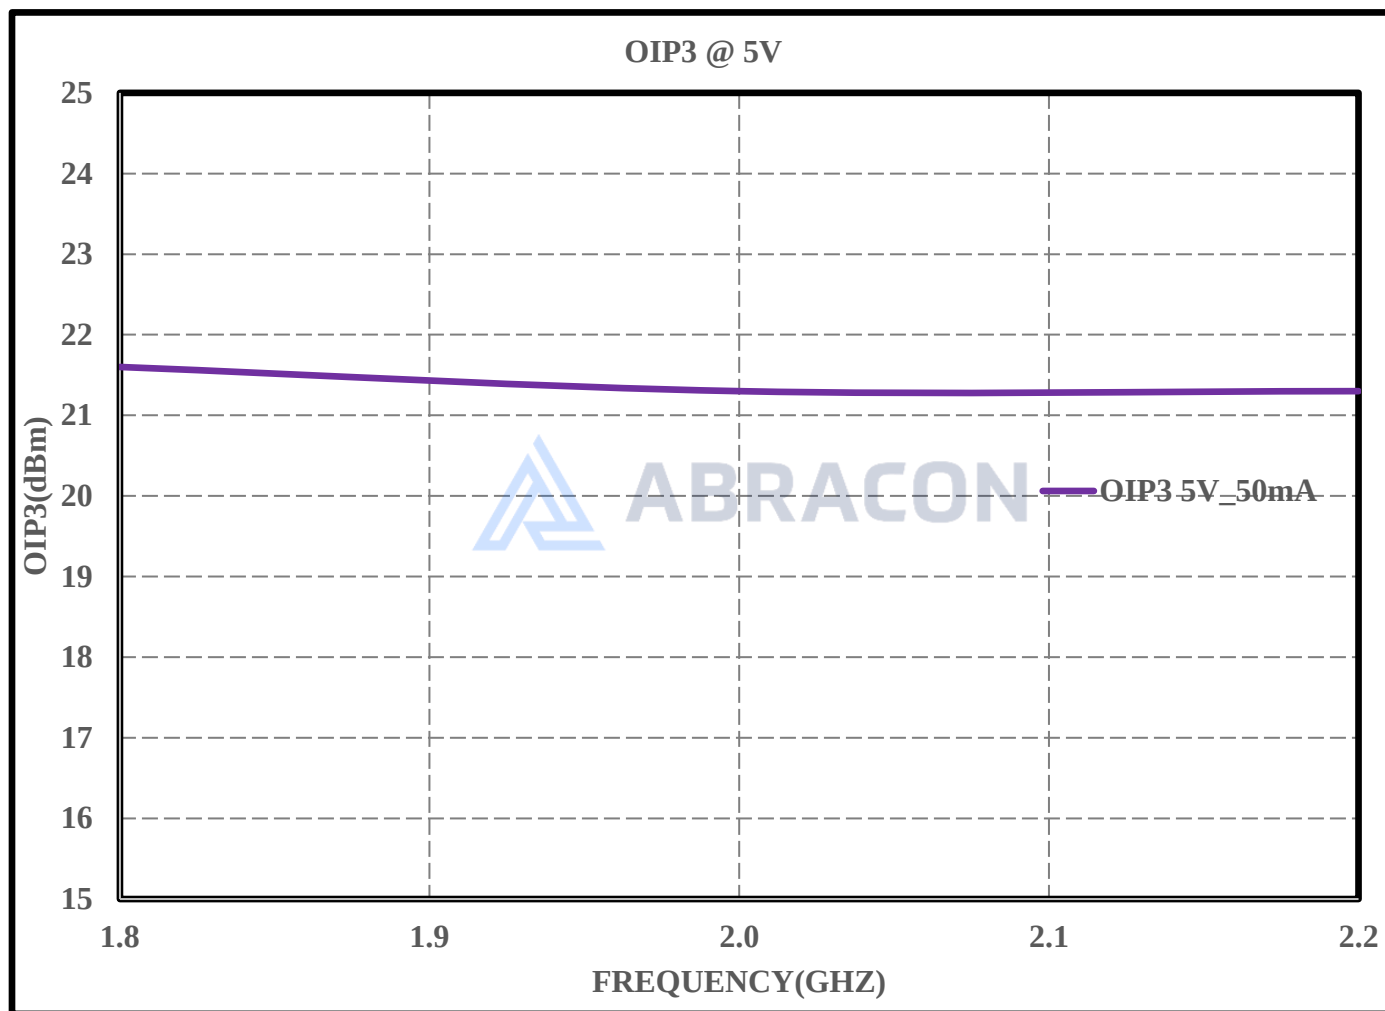

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Noise Figure

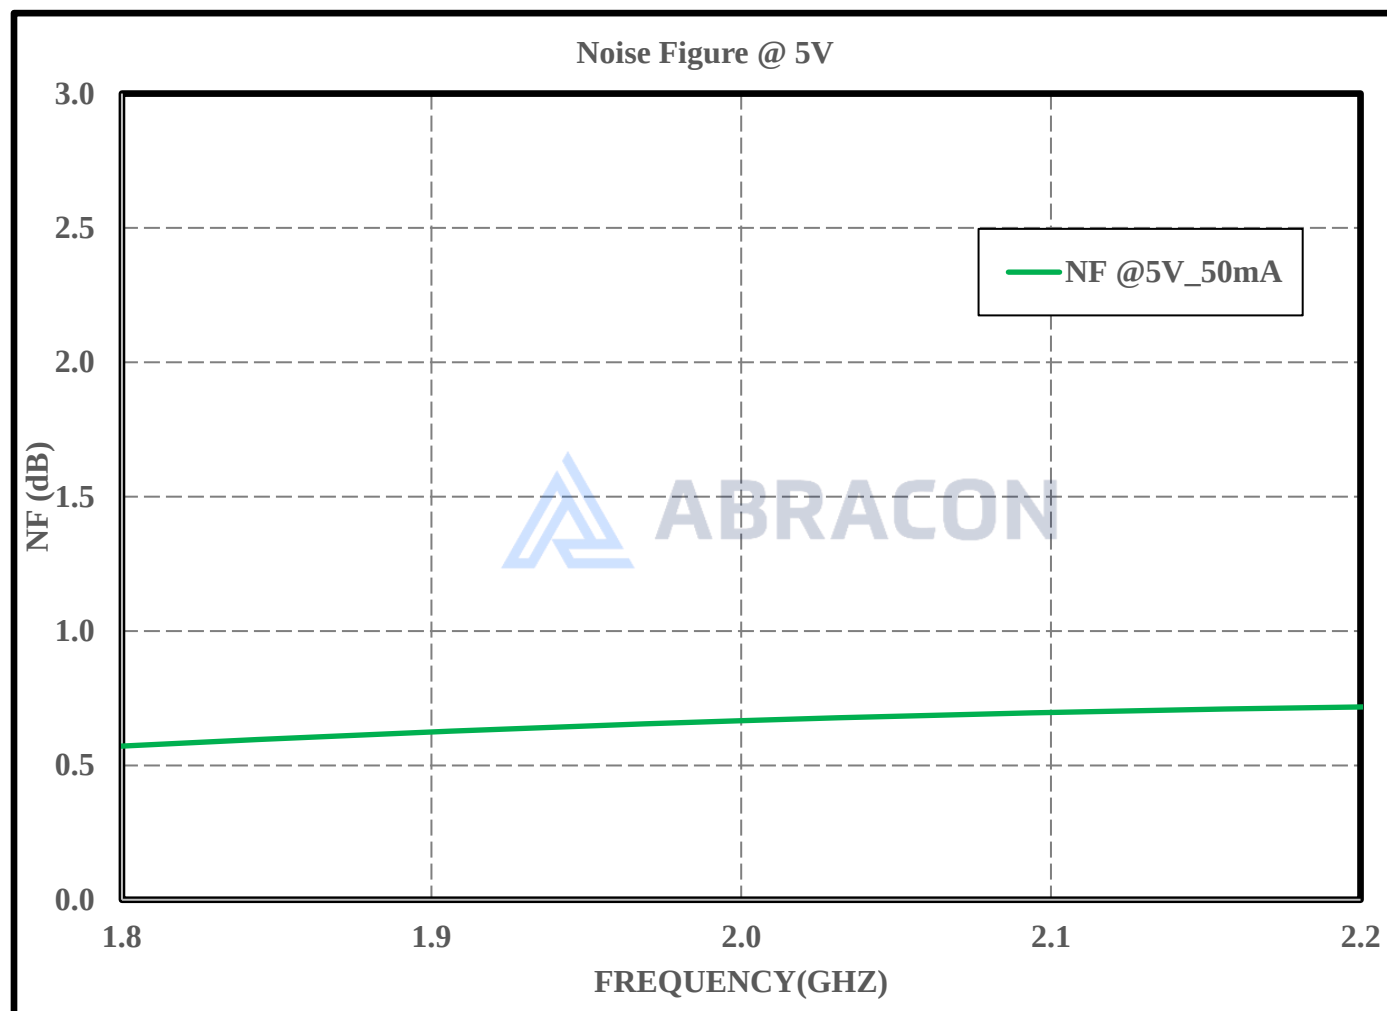

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Test Fixture Data Over the temperature

Output Return loss

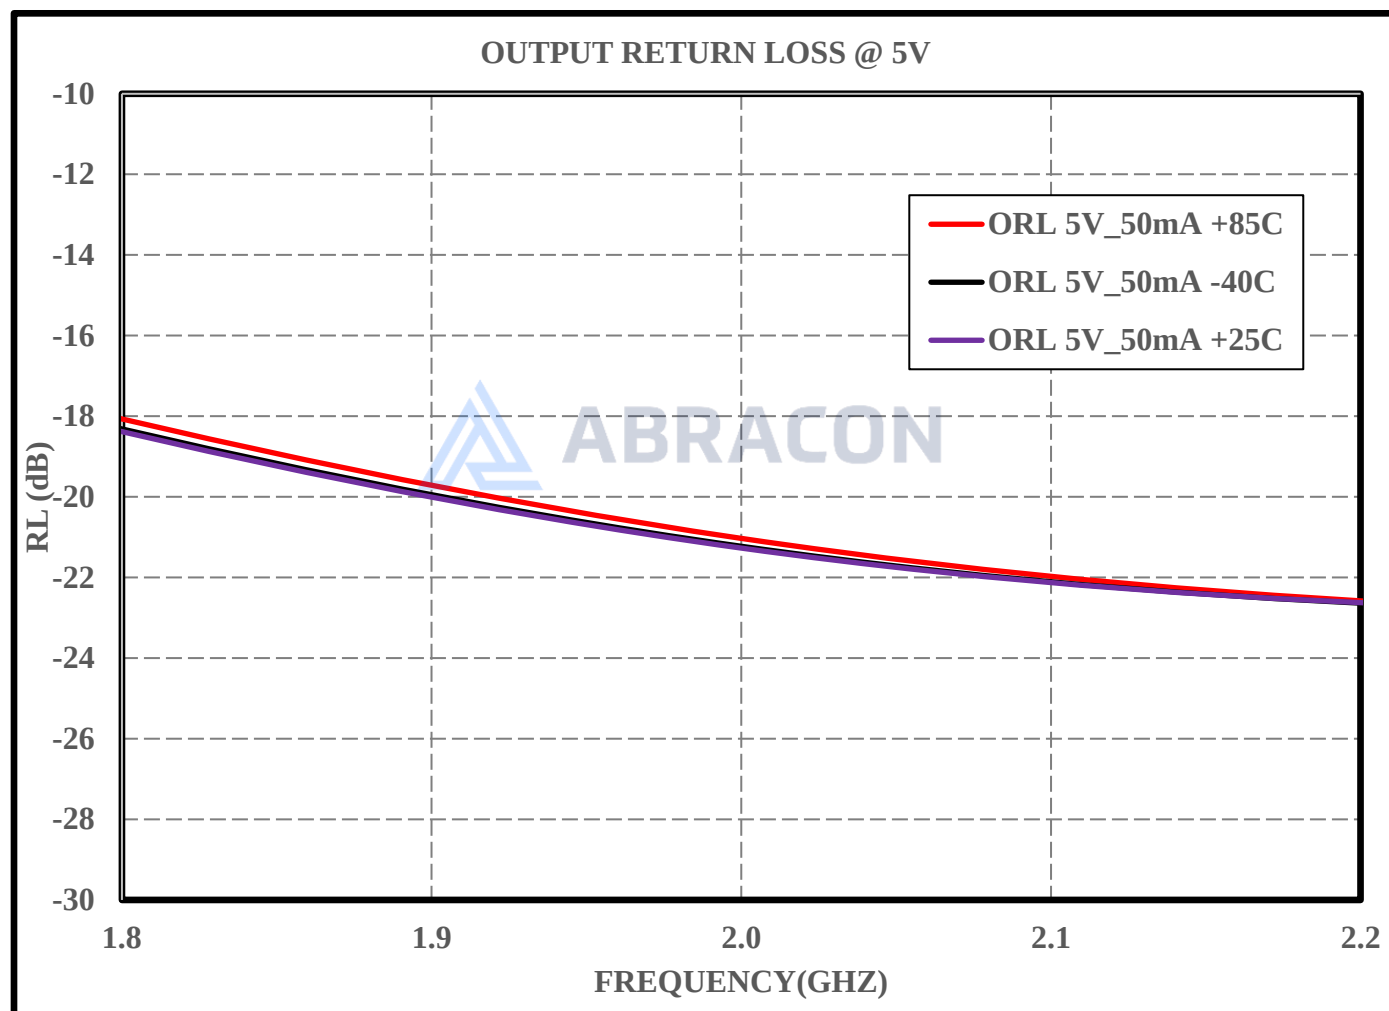

Vd = +5V, Vg1 = -0.3V, Vg2 = +2.5V, Total Current = 50mA, Ta = 25°C

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Input Return loss

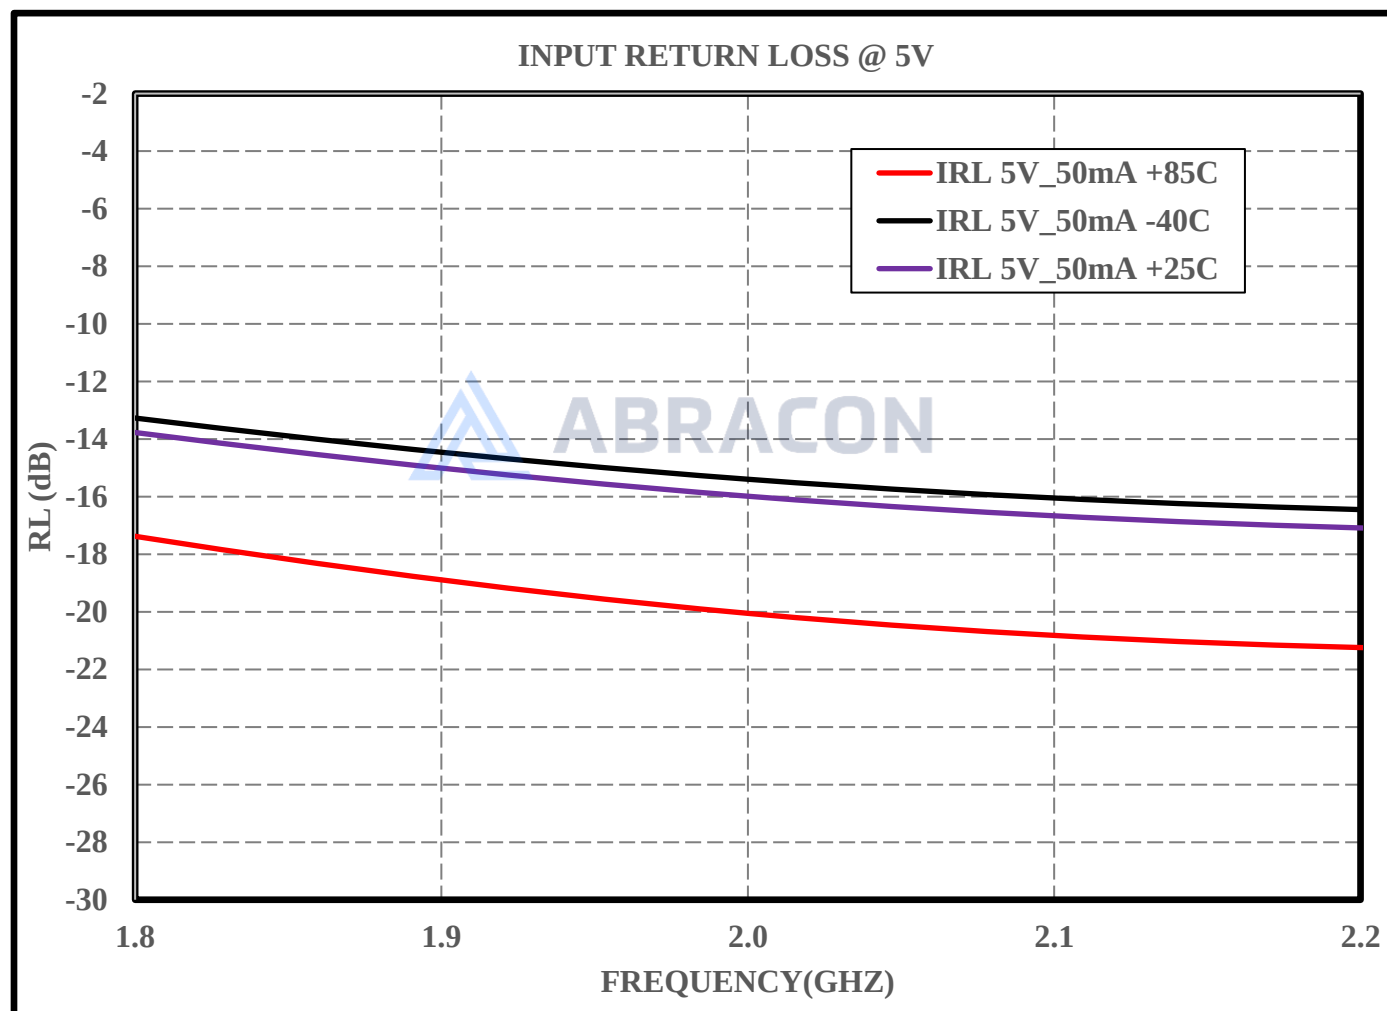

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Gain

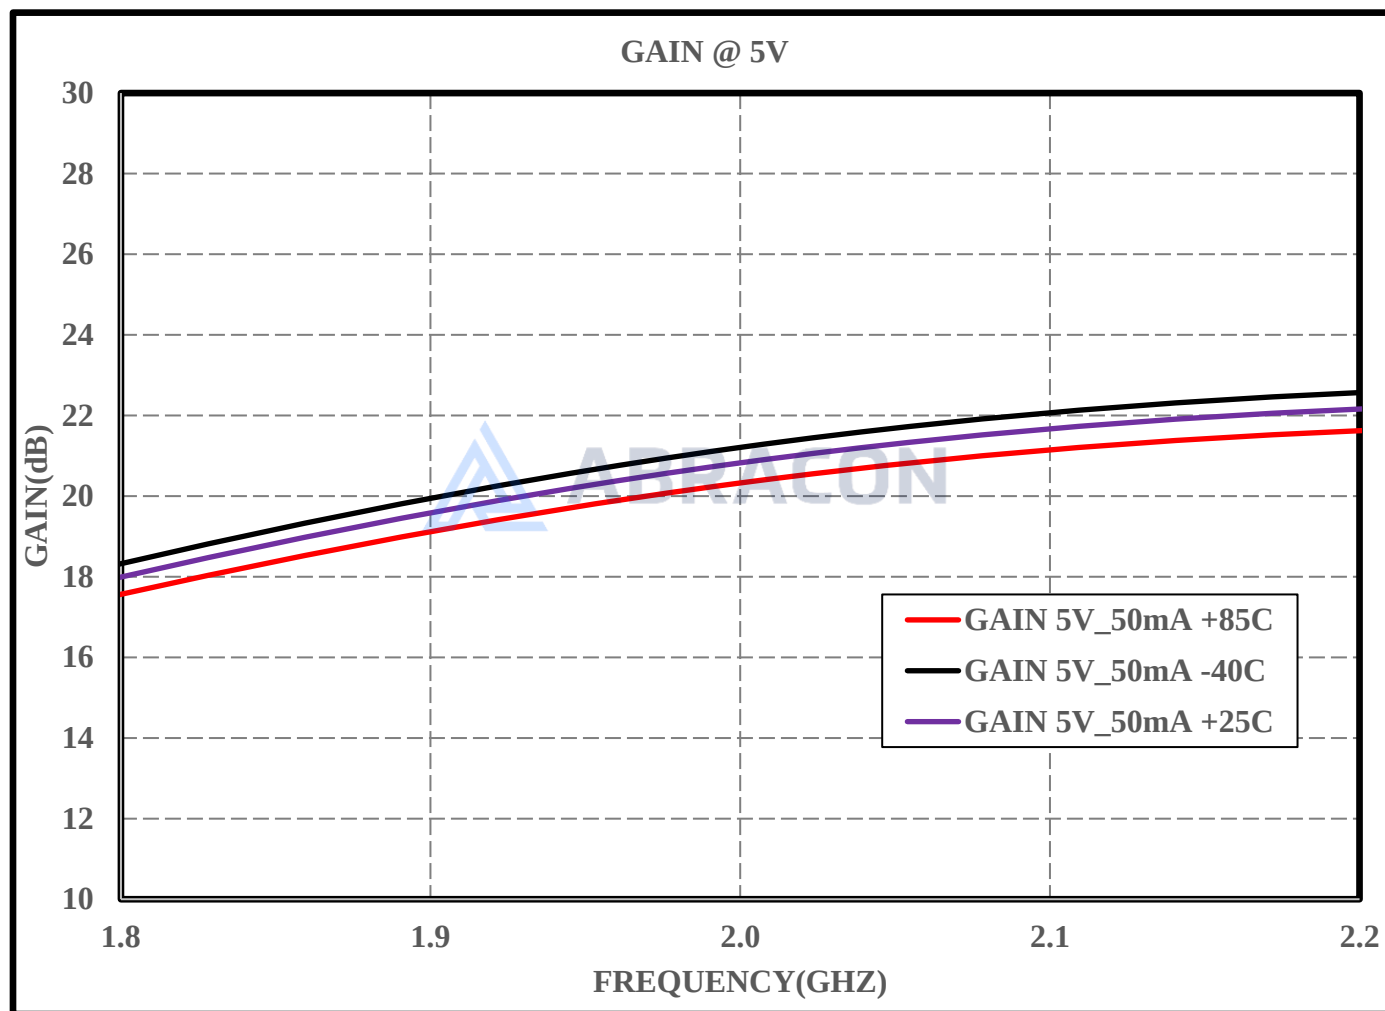

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory




3.0 x 3.0 x 1.0 mm
RoHS Compliant

Isolation

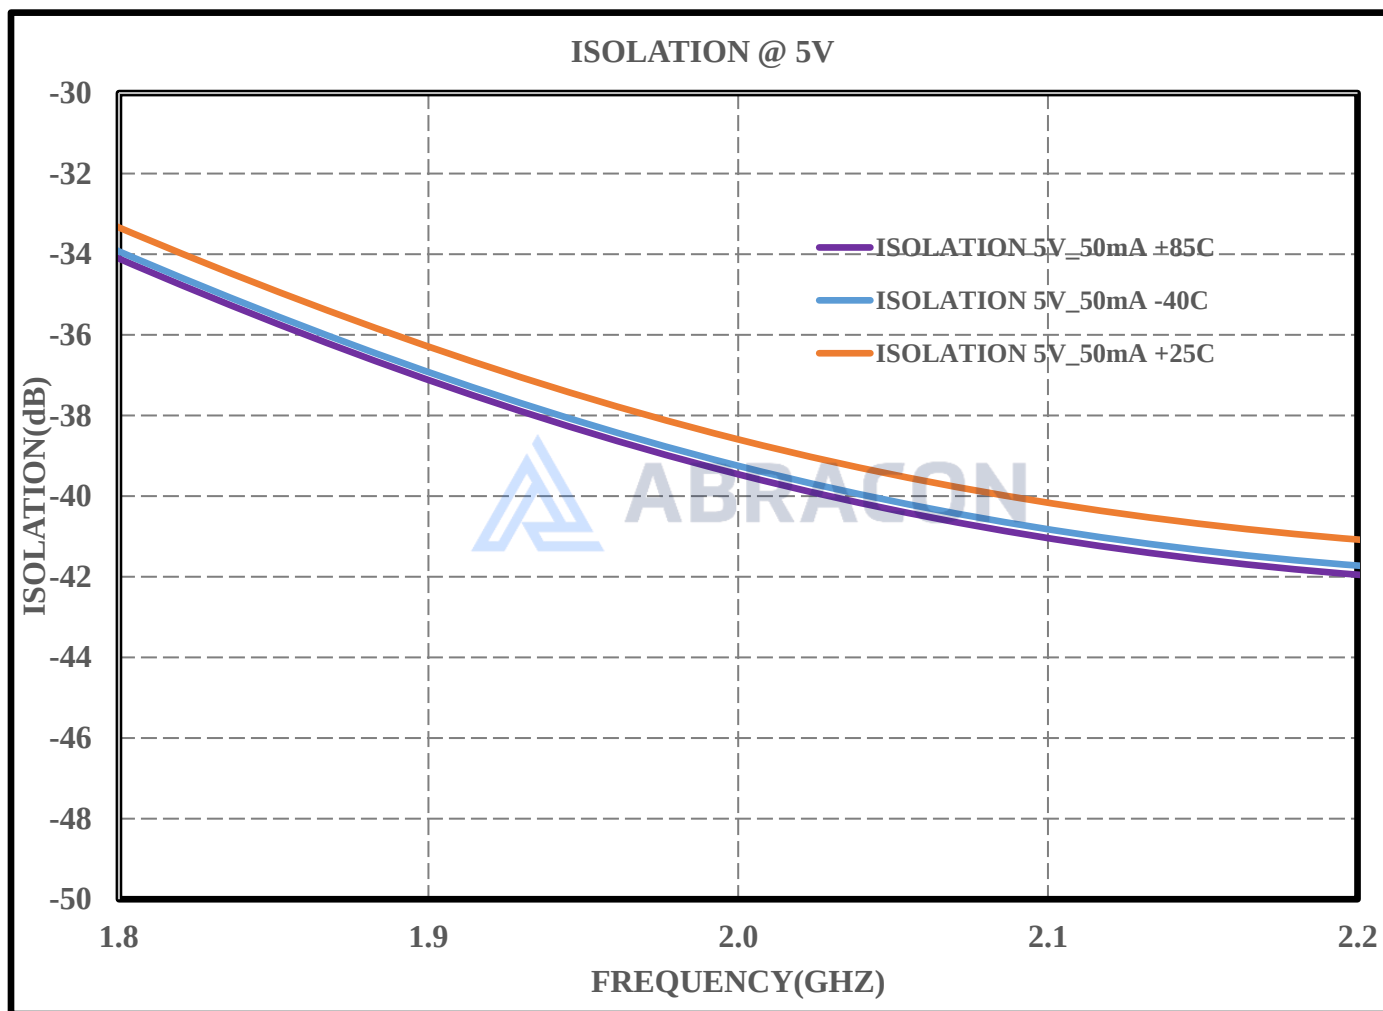

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Noise Figure

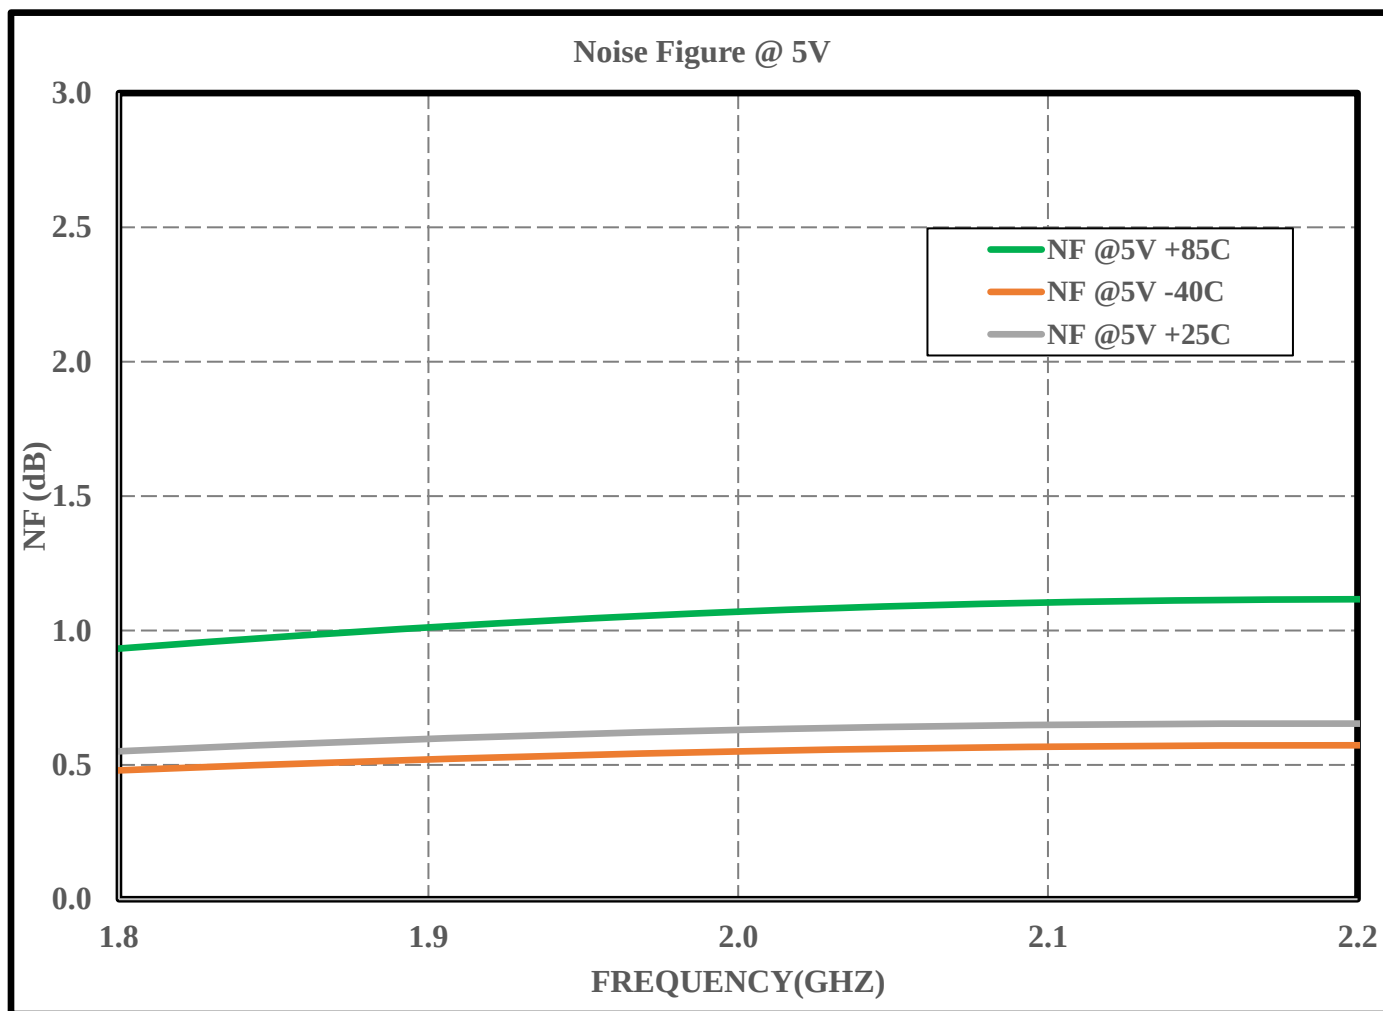

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Pin Configuration

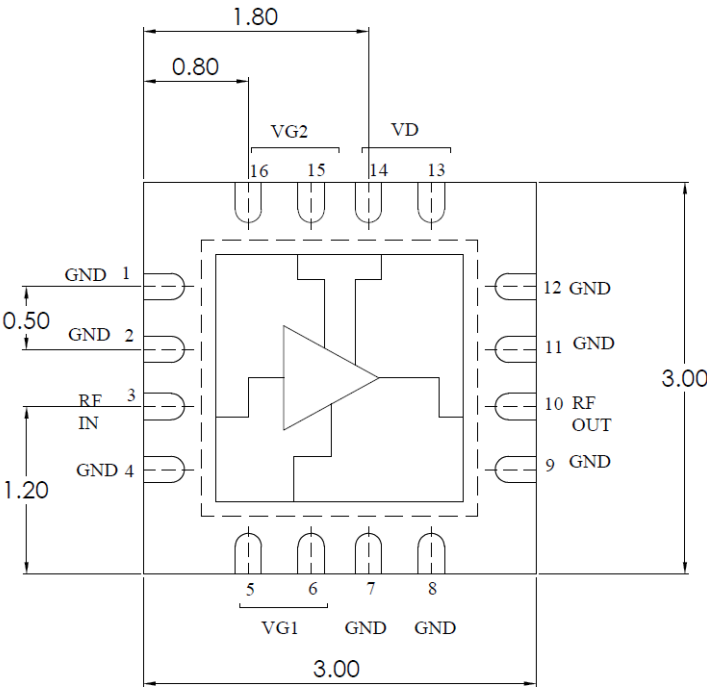

Unit: mm

Pin Description	
Pin 3	RF in
Pin 5, 6	Gate Bias 1
Pin10	RF out
Pin 13, 14	Drain Bias
Pin 15, 16	Gate Bias2
Pin 1,2,4,7,8,9,11,12	Ground

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

Request Samples




Check Inventory



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Test Board Pattern

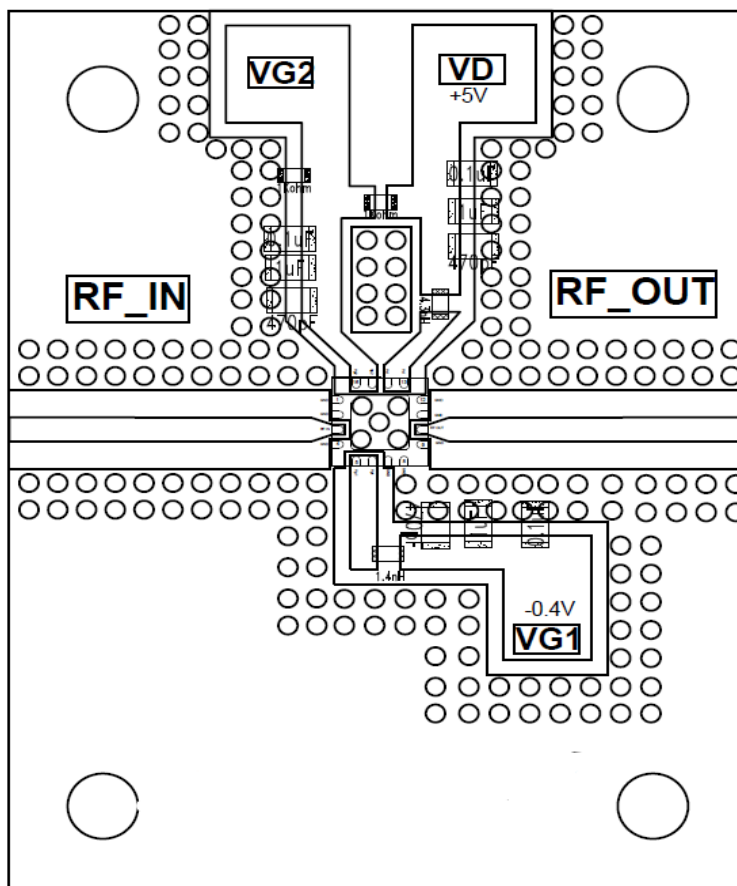

List of Components:

Component ID	Value	Description / Part No.
C1	470 pF	Bypass capacitor / ATC Dicap 116UK471M100TT or equivalent
C2	0.1 uF	2nd Bypass Capacitor (0402 Pkg.)
C3	1uF	3rd Bypass Capacitor (0402 Pkg.)
R1, R2	1K Ohm	Resistor in VG2 Bias network (0402 Pkg.)
L1 & L2	As per the Table “Electrical Specifications”	Freq. Band Tuning Inductors, 0603 Pkg. or Gold Coil
Board Material: RT/ Duroid 5880		

0.8 – 4.0 GHz Frequency Tunable Ultra Low Noise Amplifier



ALND-WB-0008

[Request Samples](#)



[Check Inventory](#)



3.0 x 3.0 x 1.0 mm
RoHS Compliant

Packaging

Packing Tubes

10pcs per tube, 50 tubes per box

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669

Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 12-02-24

ABRACON IS
ISO9001-2015
CERTIFIED