

Part No. X1005323-W3A1SA10A1

WiFi External Antenna

(2400-2500; 5150-5850) MHz

Supports: Tracking, Smart Home, Agriculture, Automotive, Healthcare, Digital Signage, Logistics, Industrial Devices



WiFi External Antenna

(2400-2500; 5150-5850) MHz

KEY BENEFITS

Reduced Costs and Time-to Market

Standard antennas eliminate design fees and cycle time associated with a custom solution, getting products to market faster.

High Performance

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Reliability

Products are the latest RoHS & REACH version compliant.

APPLICATIONS

- Remote Monitoring
- Point of Sale
- IoT
- Gateway
- Telematics
- Tracking
- Healthcare
- M2M, Industrial devices
- Smart Grid
- Logistics
- Energy
- Retail

KYOCERA AVX's WiFi external antenna delivers on the key needs of device designers for higher functionality and performance.

Electrical Specifications

Typical characteristics in free-space

Frequency	2400~2500 MHz	5150~5825 MHz
Peak Gain	2.5 dBi	3.3 dBi
Average Efficiency	44%	31%
VSWR	2.0:1 max	
Impedance	50 Ω	

Mechanical Specifications



Ordering Part #	X1005323-W3A1SA10A1
Dimensions (mm)	105.1 x 30.1 x 6.7
Mounting Type	Adhesive Foam
Operating Temperature (°C)	-40 ~ +85
Housing Material & Color	PC+ABS (Black)
Weight (grams)	36
Cable	Length: 1M Type: RG-174
Connector	SMA(M)
Waterproof	IPX7

WiFi External Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

VSWR (WiFi 2400-2485, 5150-5825 MHz)

Typical characteristics in free-space

VSWR:

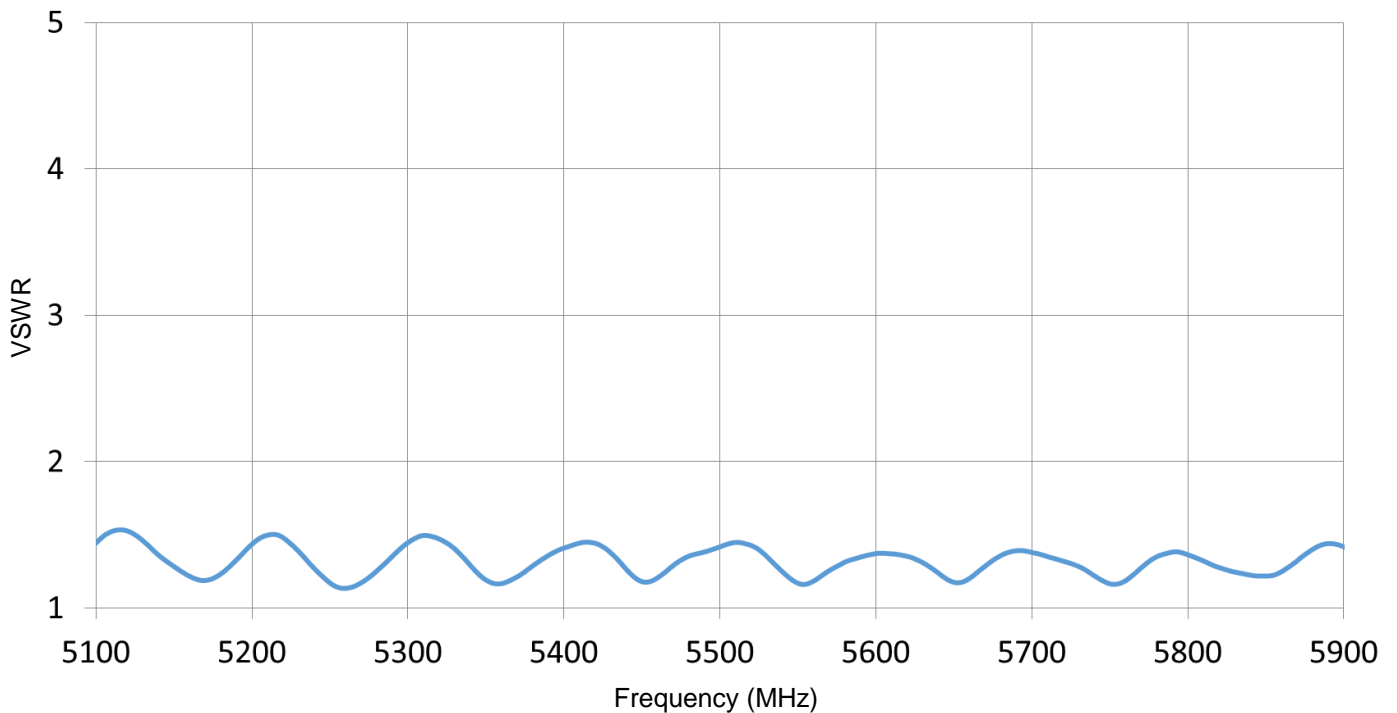
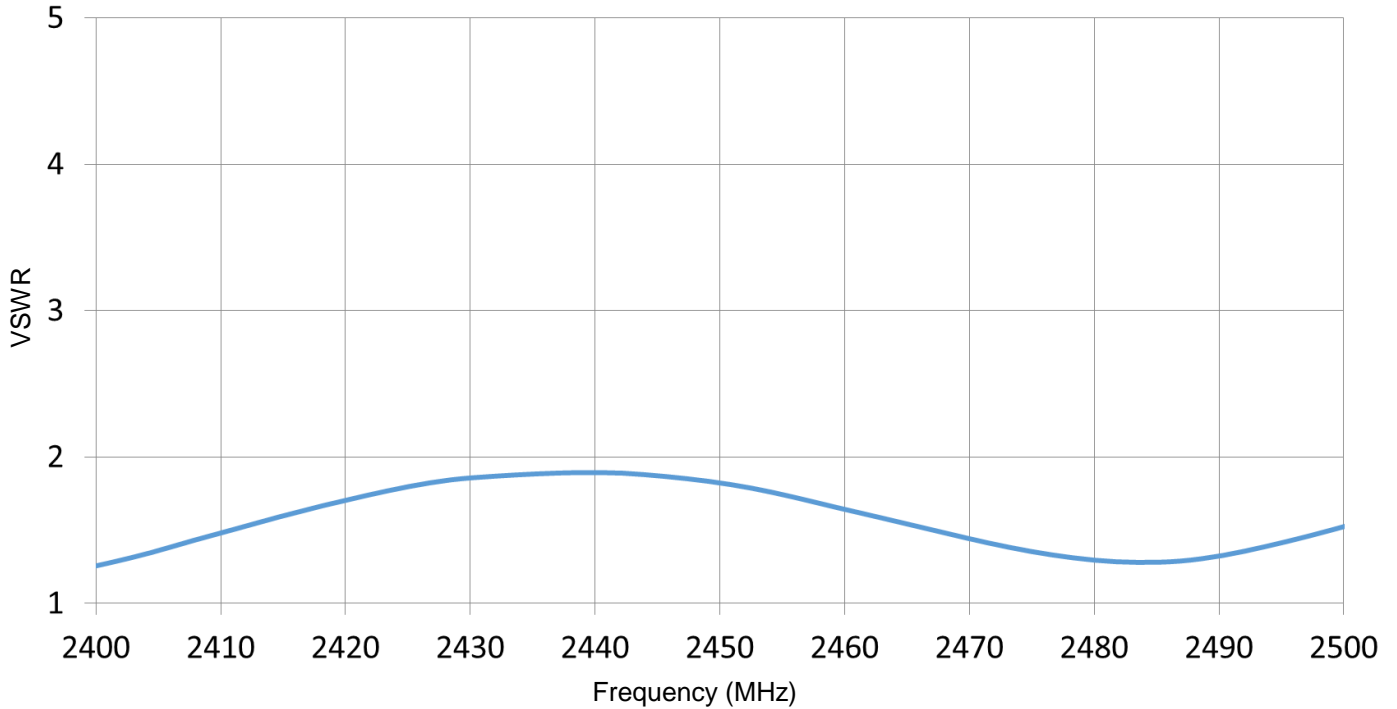


WiFi External Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Efficiency (WiFi 2400-2485, 5150-5825 MHz)

Typical characteristics in free-space

Efficiency:

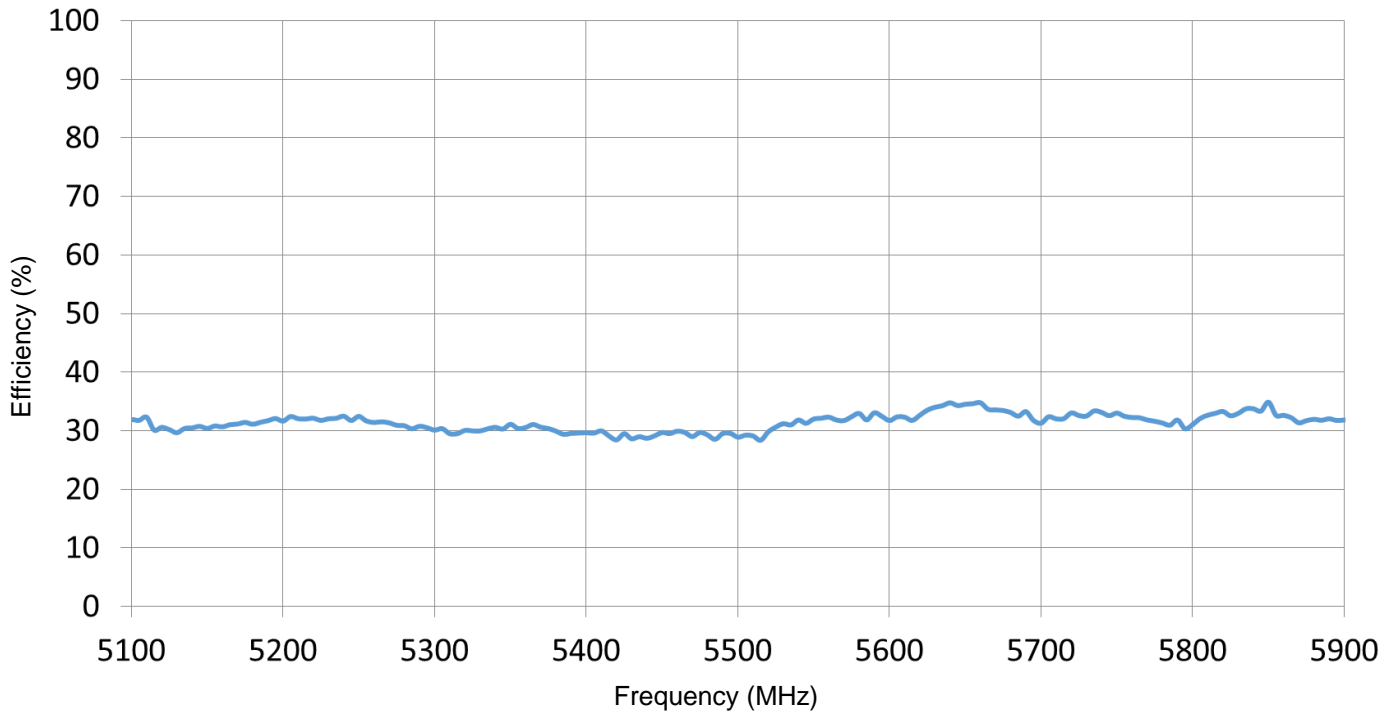
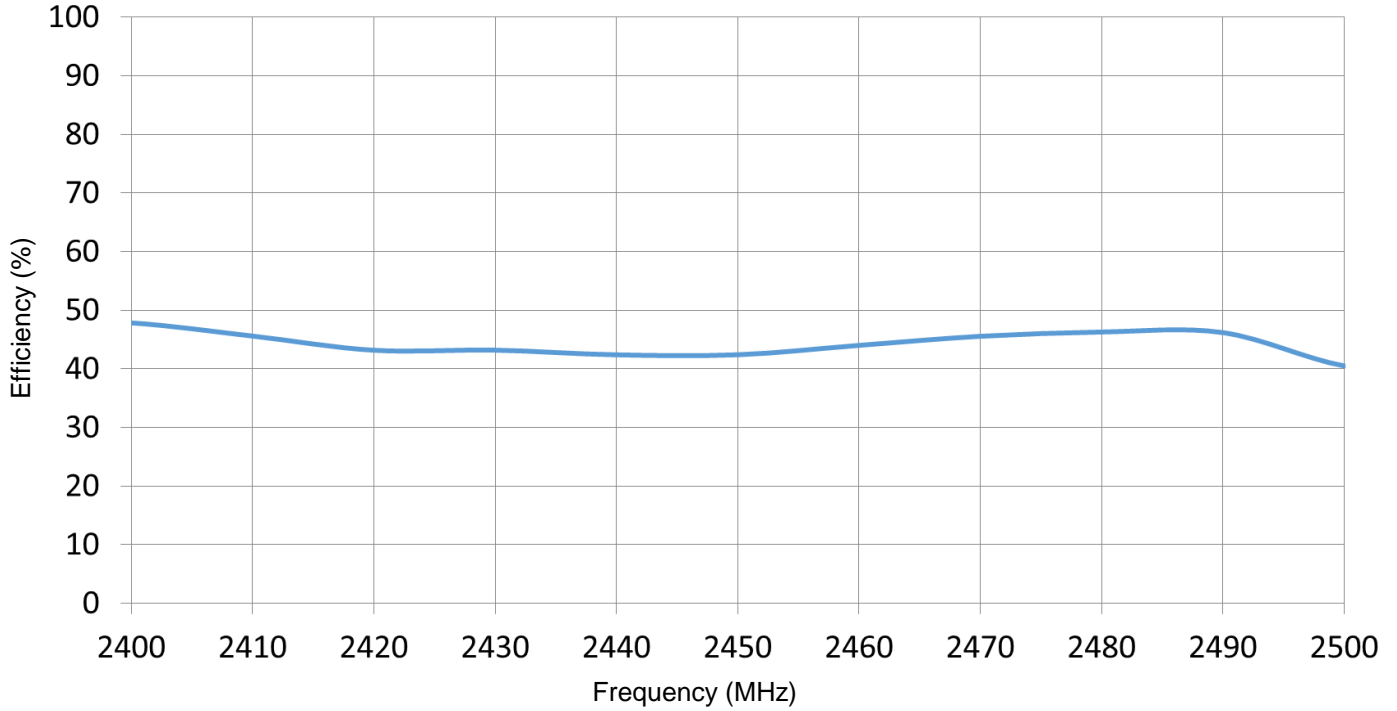


WiFi External Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Peak Gain (WiFi 2400-2485, 5150-5825 MHz)

Typical characteristics in free-space






Peak Gain:

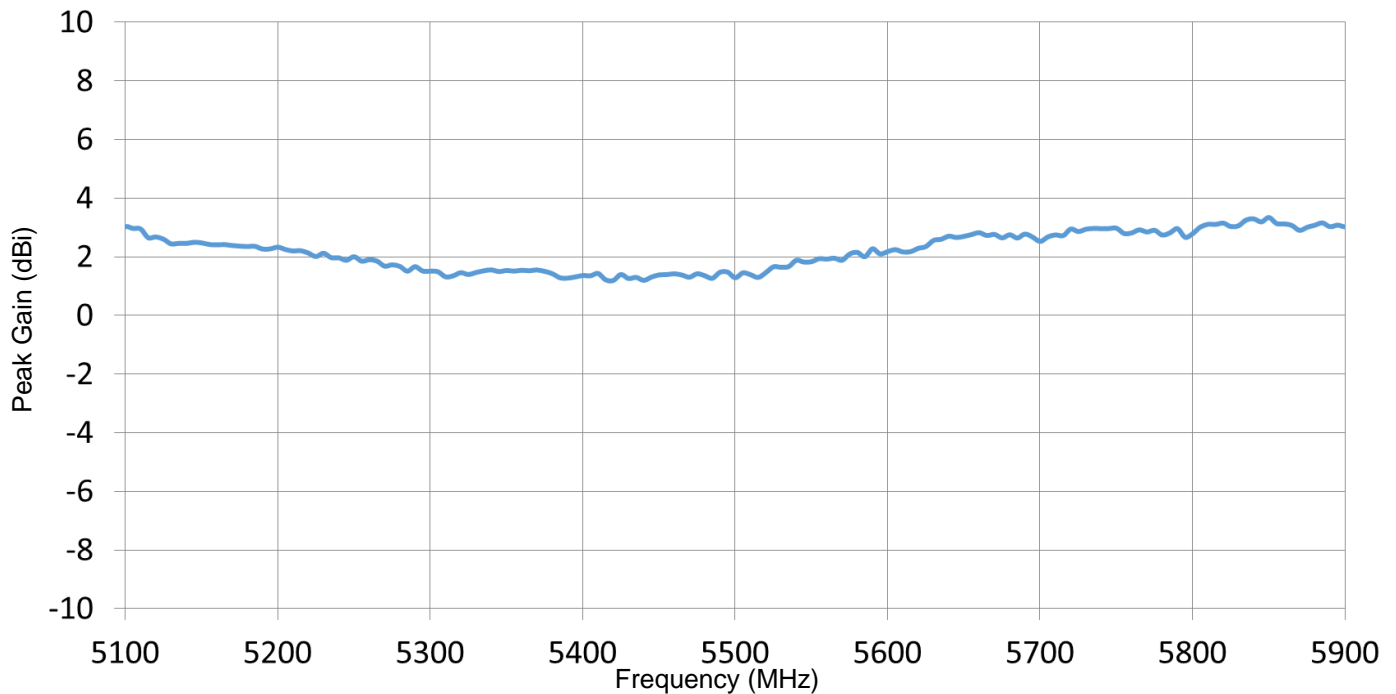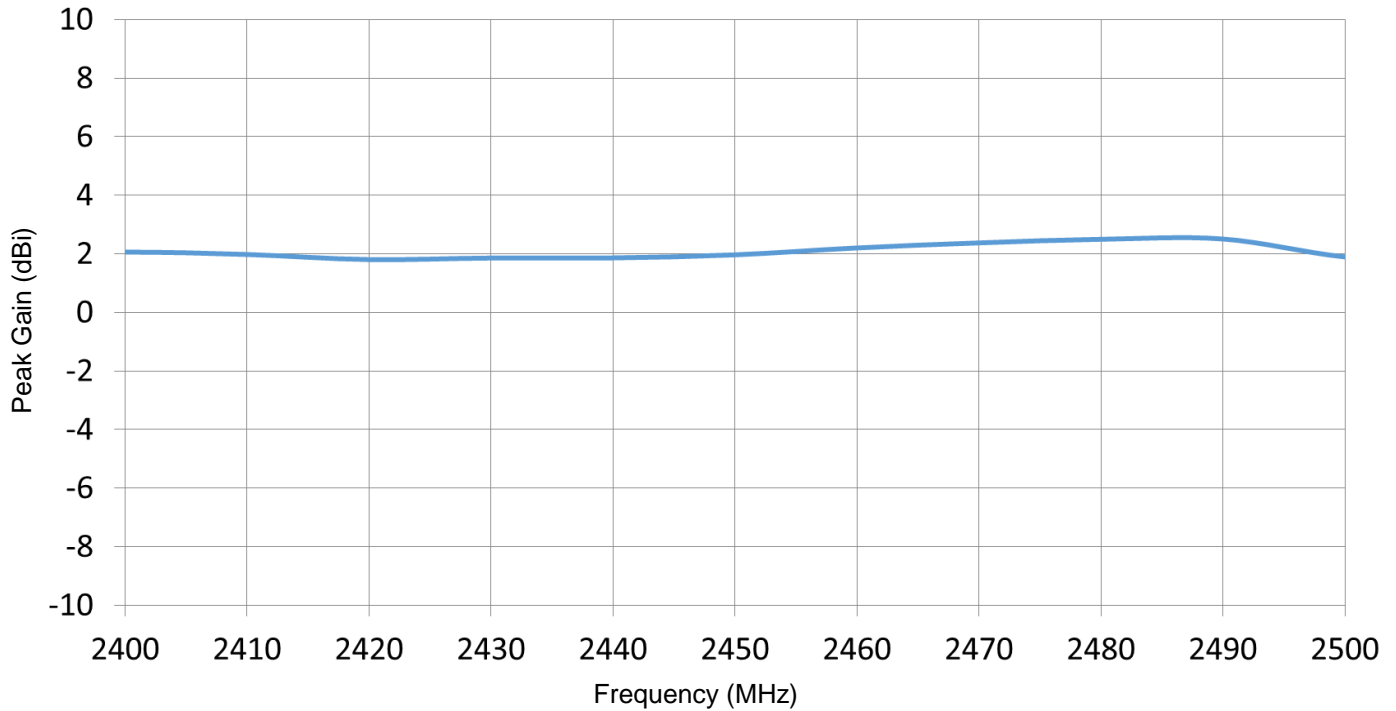

WiFi External Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

2D Radiation Patterns (WiFi 2400-2500 MHz)

Typical characteristics in free-space

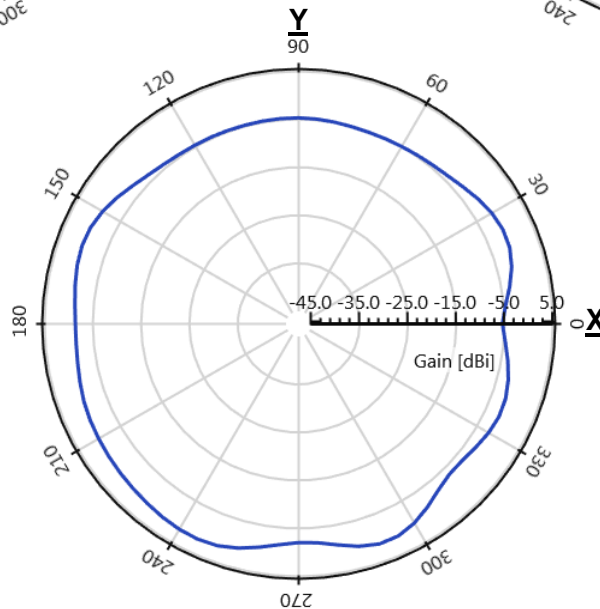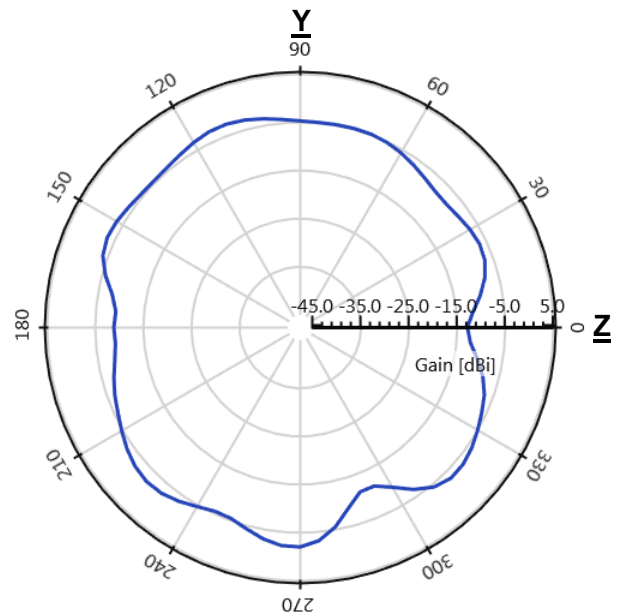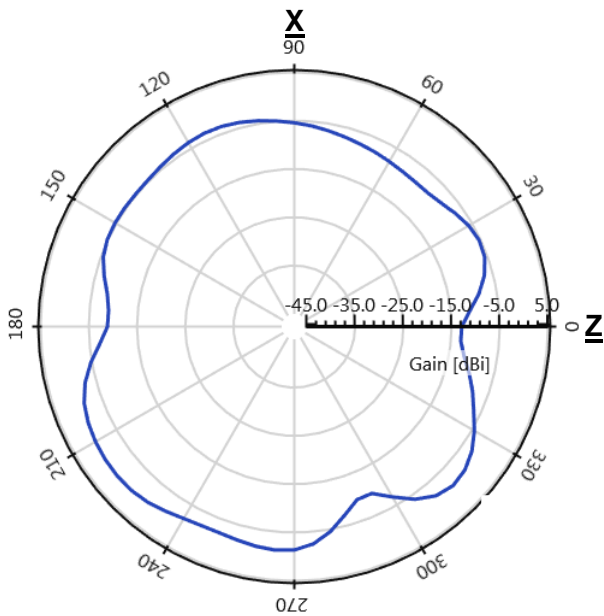
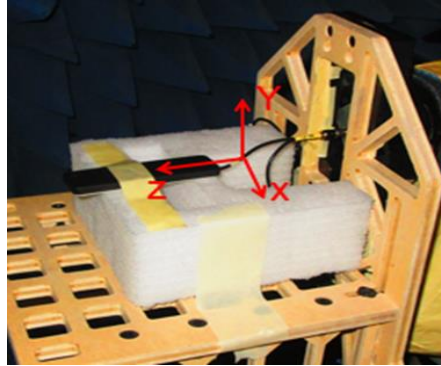



WiFi External Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

2D Radiation Patterns (WiFi 5150-5850 MHz)

Typical characteristics in free-space

☒ 5200 MHz

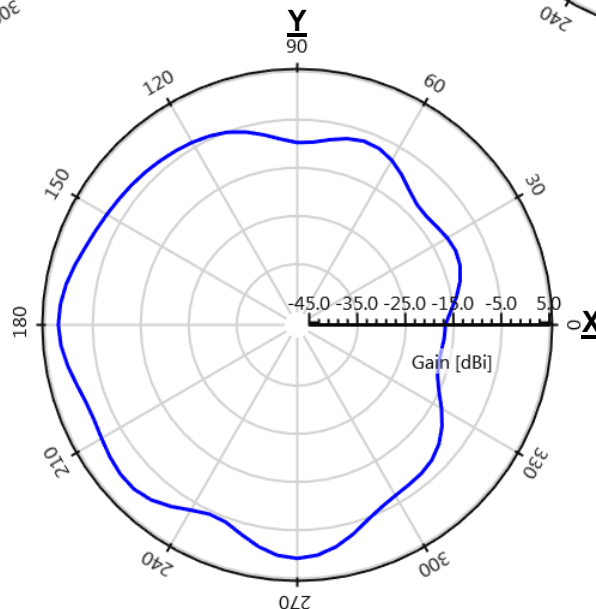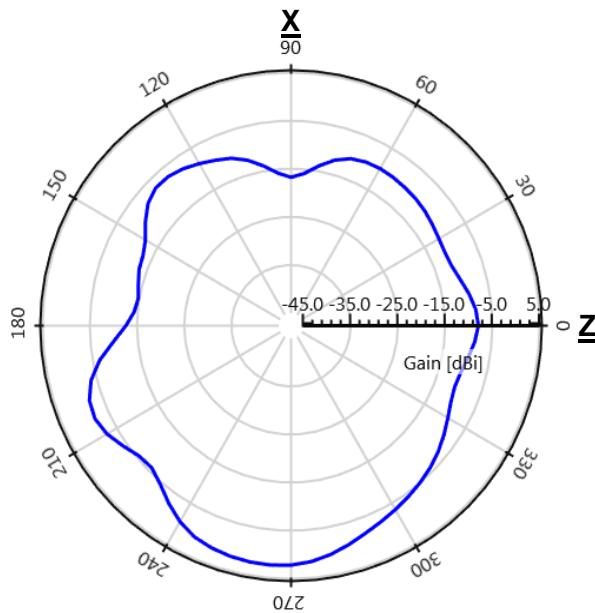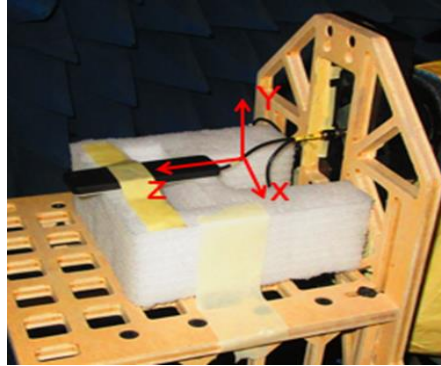

WiFi External Antenna Specifications.


KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Mechanical Dimensions


Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)	D (mm)
X1005323-W3A1SA10A1	105.1 ± 3.0	30.1 ± 1.5	6.7 ± 1.0	1000 ± 40.0

Top View

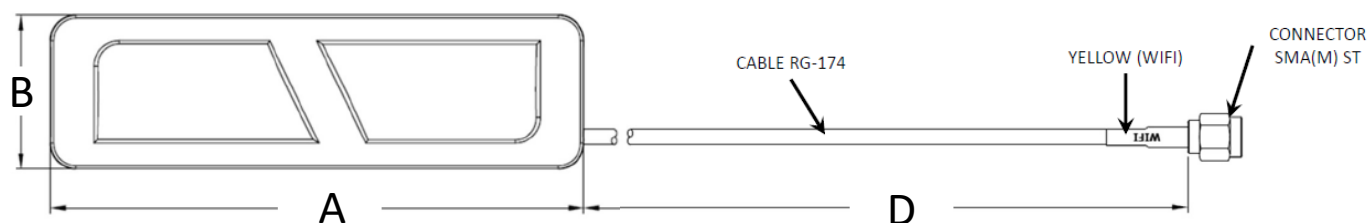

Side View

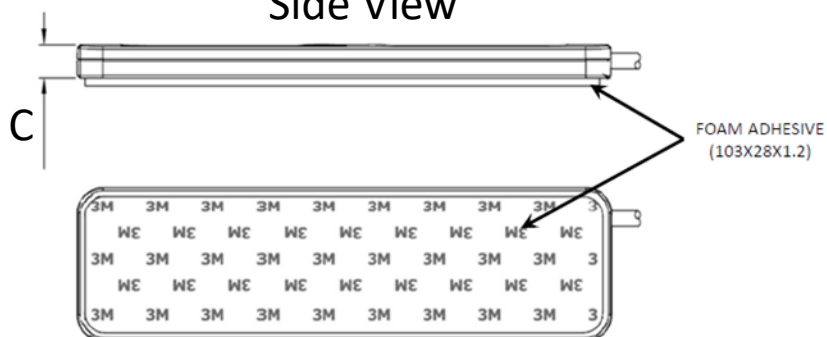

Bottom View

