


4	3		2		1		
	REV	ZONE	DESCRIPTION	ECN NO.	ENG	APPROVED	DATE

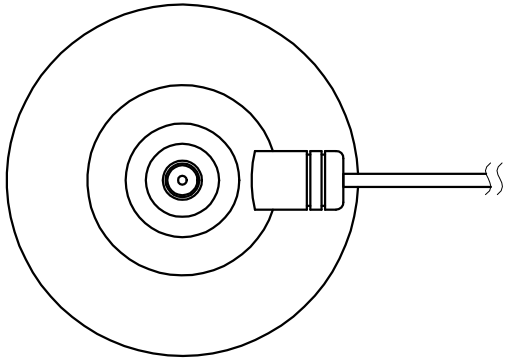

RP SMA JACK

O-RING

3000⁺¹⁰⁰₋₀

Cable RG174


Heat Shrink Tube

Reverse SMA PLUG

40.5±2

6

ø48

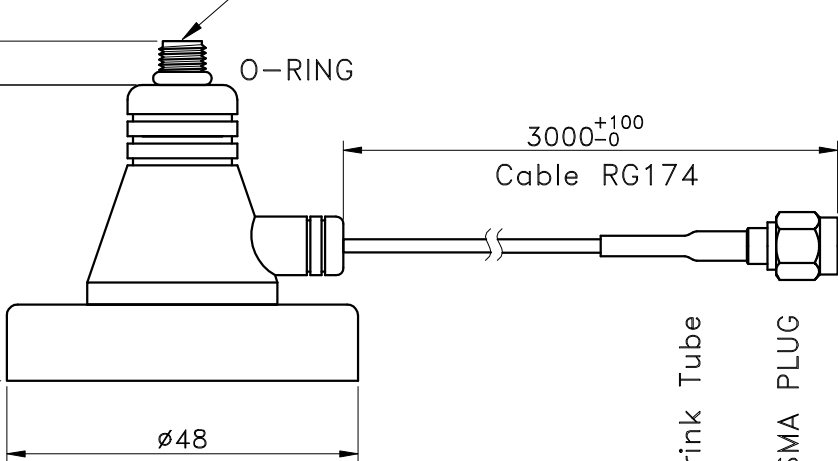

Electrical Properties	
Frequency Range	DC~7.2GHz
Impedance	50Ω
V.S.W.R.	≤2.0
Mechanical Properties	
Weight	142g (est)
Operating Temp	-40℃ ~ +85℃

UNLESS OTHERWISE SPECIFIED TOLERANCES ON:

X ± 1

X.X ± 0.5

X.XX ± 0.25

ANG. ± 2.0°

THIRD ANGLE PROJECTION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO JOYMAX AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DRAWN BY:

DESIGNED BY: KYLIU

CHECKED BY:

APPROVED BY:

MATERIAL:

FINISH:

SCALE:1/1;UNIT:mm

DATE:2023/12/4

REV: A

TITLE : Magnetic Base

DRAW NO. :

PART NO. : CX-6500SAC0P0300

JOYMAX ELECTRONICS CO.,LTD.