

SMA Female Field Replaceable Active 2x Frequency Multiplier with 8 GHz to 21 GHz Output and +10 dBm Output Power

The FMFX2003 is a low noise X2 active broadband frequency multiplier module that covers a wide output frequency bandwidth from 8 GHz to 21 GHz. The frequency doubler design utilizes advanced GaAs HBT MMIC semiconductor technology that produces low additive SSB phase noise performance with a typical level of -142 dBc/Hz at 100 kHz offset. Additional typical performance includes an output power level of +14 dBm with an input signal of +6 dBm. Input/output ports are matched for 50 ohms and are DC blocked. The design also incorporates integrated bias sequencing circuitry and voltage regulators to allow for flexible biasing for both the negative and positive voltage supplies. The compact drop-in package is RoHS compliant and hermetically sealed with field replaceable SMA connectors. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for hermeticity and temperature cycle.

Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc, VDC2 = -5 Vdc, IDC1 = 102 mA, IDC2 = 5 mA, Input Power = +6 dBm)

Description	Min	Typ	Max	Units
Input Frequency Range	4		10.5	GHz
Output Frequency Range	8		21	GHz
Impedance		50		Ohms
Input Power (CW)		+6		dBm
Output Power	+10	+14		dBm
Fundamental Harmonic Suppression		16		dBc
Phase Noise @100kHz Offset		-142		dBc/Hz
Input Return Loss		14		dB
Output Return Loss		10		dB
Operating DC Voltage 1		12		V
Operating DC Current 1		102		mA
Operating DC Voltage 2		-5		V
Operating DC Current 2		5		mA

Mechanical Specifications

Size

Length	1.086 in [27.58 mm]
Width	0.85 in [21.59 mm]
Height	0.28 in [7.11 mm]
Weight	1.25 lbs [566.99 g]
Input Connector	Field Replaceable SMA Female
Output Connector	Field Replaceable SMA Female

Environmental Specifications

Temperature

Operating Range	-55 to +85 deg C
Storage Range	-65 to +150 deg C
Temperature Cycling	MIL-STD-883, Method 101C, Cond B
Hermetic Seal	Gross Leak MIL-STD-883 Method 1014C1/Fine Leak MIL-STD-883, Method 1014A2, 5 x 10 ⁻⁸ atm cc



Features:

- Frequency Doubler
- Wide Frequency Band
- GaAs HBT MMIC Technology
- Low Phase Noise -142 dBc/Hz @ 100 kHz offset
- Output Power +14 dBm
- Dual Bias Voltages +12 VDC and -5 VDC
- Integrated DC Blocking Capacitors
- Hermetically Sealed Module
- Mil Spec Compliant
- Field Replaceable SMA Connectors
- -55°C to +85°C Operating Temperature

Applications:

- Electronic Warfare
- Electronic Countermeasures
- Point-To-Point Radio
- Point-To-Multipoint Radio
- VSAT Radios
- Fiber Optic
- Space Systems
- Test Instrumentation
- Telecom Infrastructure

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

ESD Sensitivity

ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.




Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Functional Block Diagram

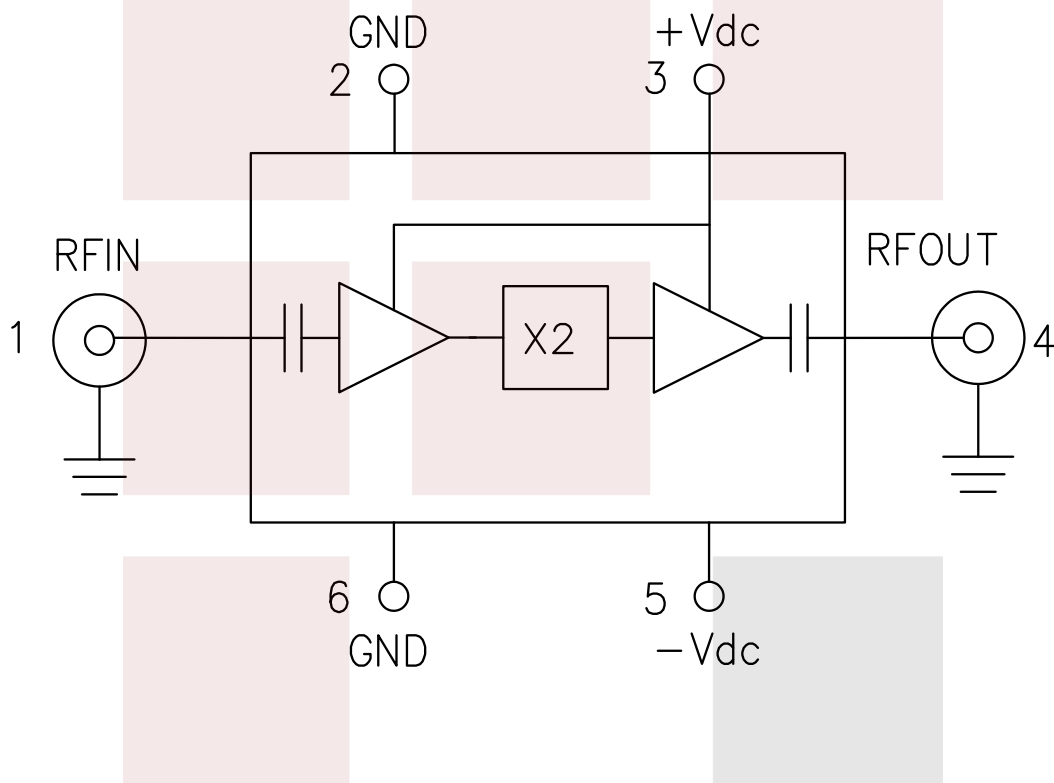


Typical Performance Data


**Output Power vs.
Temperature @ 6 dBm Drive Level**

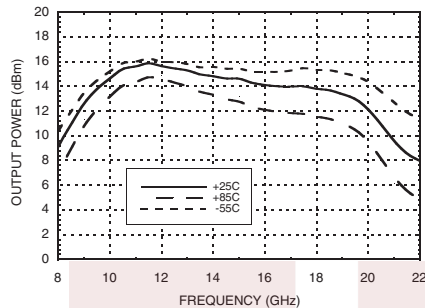


Output Power vs. Drive Level

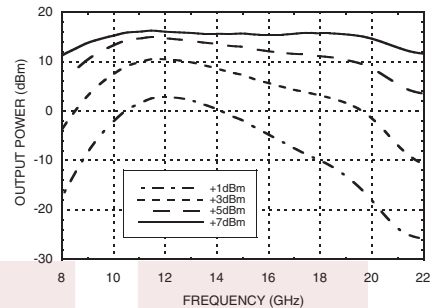


Output Power vs. Input Power

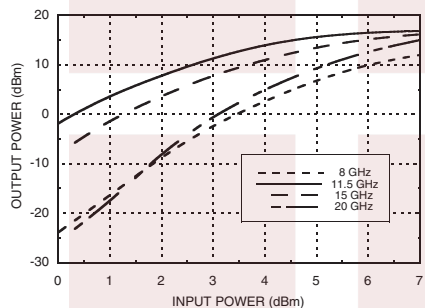


Isolation @ 6 dBm Drive Level

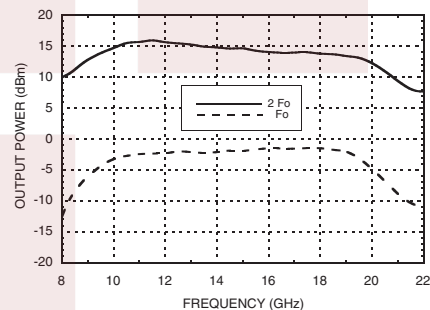


SSB Phase Noise Performance
 $F_{out} = 15 \text{ GHz}$, Input Power = 6 dBm

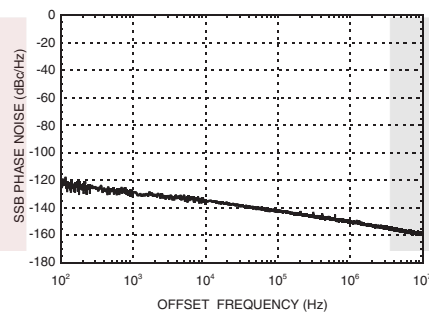

**Input Return Loss vs.
Temperature @ 0 dBm Drive Level**

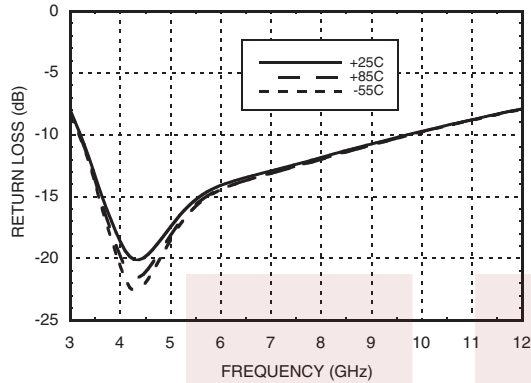

**Output Return Loss vs.
Temperature @ 0 dBm Drive Level**

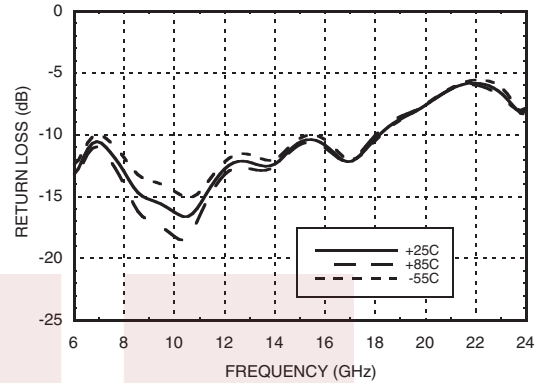


SMA Female Field Replaceable Active 2x Frequency Multiplier with 8 GHz to 21 GHz Output and +10 dBm Output Power from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Female Field Replaceable Active 2x Frequency Multiplier with 8 GHz to 21 GHz Output and +10 dBm Output Power FMFX2003](https://www.fairviewmicrowave.com/sma-field-replaceable-active-2x-frequency-multiplier-21-ghz-10-dbm-fm-fx2003-p.aspx)

URL: <https://www.fairviewmicrowave.com/sma-field-replaceable-active-2x-frequency-multiplier-21-ghz-10-dbm-fm-fx2003-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

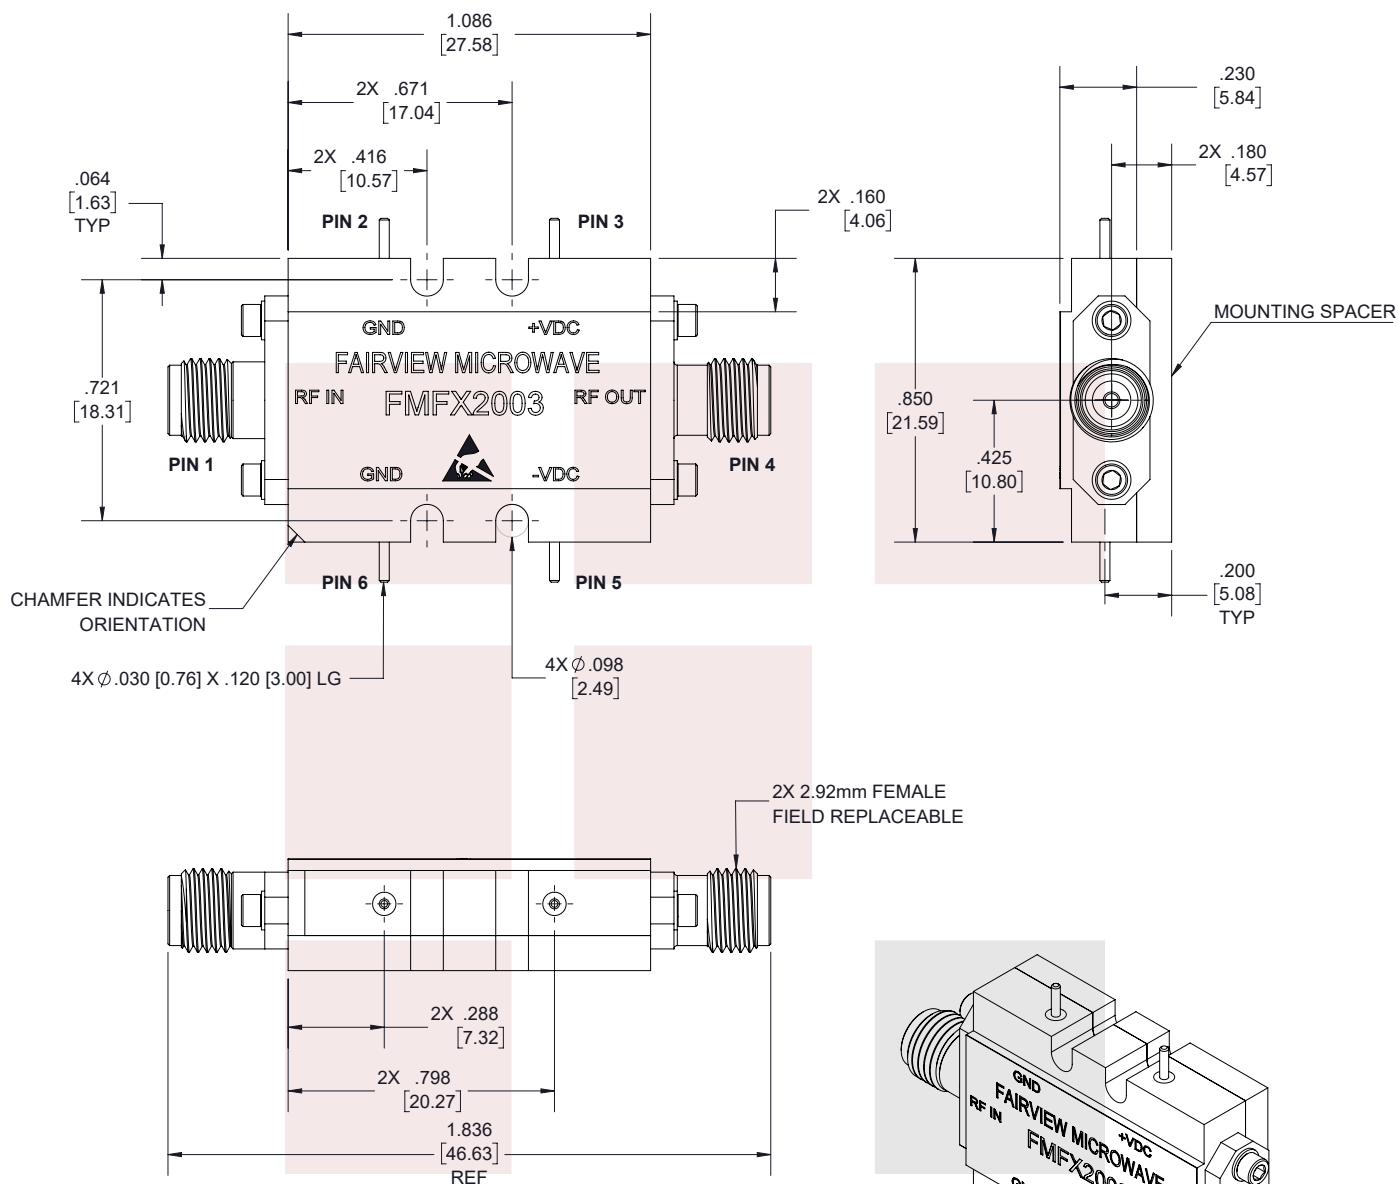

STANDARD TOLERANCES

.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE

DWG NO

FMFX2003

CAGE CODE

3FKR5

SMA Female Field Replaceable Active 2x Frequency Multiplier with 8 GHz to 21 GHz Output and +10 dBm Output Power

CAD FILE

05/29/18

SHEET

1 OF 2

SCALE N/A

SIZE A

7361