



# 20 dB WR-137 Directional Waveguide Broadwall Coupler With UG-344/U Square Cover Flange and E-Plane Coupled Port from 5.85 GHz to 8.2 GHz

The FMWCP1030 is a WR-137 Directional Broadwall waveguide coupler that operates in the frequency range of 5.85 to 8.2 GHz. This Waveguide component has a typical VSWR of 1.05:1. These designs are made of painted copper alloy and incorporate a broad wall configuration that result in a mid-band nominal coupling value of 10, 20, or 30 dB. Common applications for this component would be where power measurements are required within a system for measuring/sampling power or frequency monitoring with minimal signal loss to the main transmission line. Fairview Microwave offers a complete family of waveguide Crossguide and Broadwall couplers that are in-stock and ship same day.

### **Electrical Specifications\***

Description	Min	Тур	Max	Units		
Frequency Range	5.85		8.2	GHz		
Directivity		40		dB		
Insertion Loss		dB				
Main Line VSWR	1.05:1					
Nominal Coupling Level		20		dB		

<sup>\*</sup> Values at 25°C, sea level

#### **Mechanical Specifications**

Size

Length

Height

Weight

Configuration

Design Size

**Input Flange** 

Flange Type Flange Designation Material

Plating

**Output Flange** 

Flange Type Flange Designation Material **Plating** 

Coupled Flange(s)

Square Cover Flange Type Flange Designation UG-344/U Copper Alloy Material Silver Plating

Compliance Certifications (visit www.FairviewMicrowave.com for current

document)

**RoHS Compliant REACH Compliant** 

12/17/2015

26.5 in [673.1 mm]

5.584 lbs [2.53 Kg]

WR-137

Square Cover

Copper Alloy Silver

Square Cover

Copper Alloy Silver

UG-344/U

UG-344/U

4.62 in [117.35 mm]

Directional E-Plane Broadwall

# Fairview Microwav

#### Features:

- Broadwall Waveguide Coupler
- 20 dB Nominal Coupling Level
- 5.85 GHz to 8.2 GHz Frequency Range
- Body and Flanges made of Copper Alloy
- Low VSWR

## **Applications:**

- Test Benches
- Radar
- Satellite
- Microwave Radio
- Attenuation Measurements
- Power Measurements
- Source Leveling

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






#### **Plotted and Other Data**


Notes:

• Values at 25 °C, sea level

#### **Typical Performance Data**

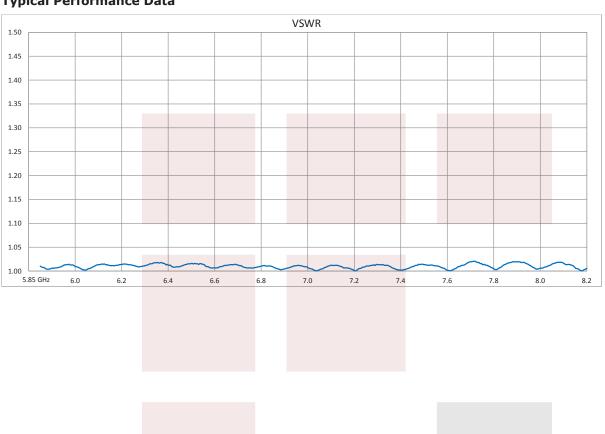



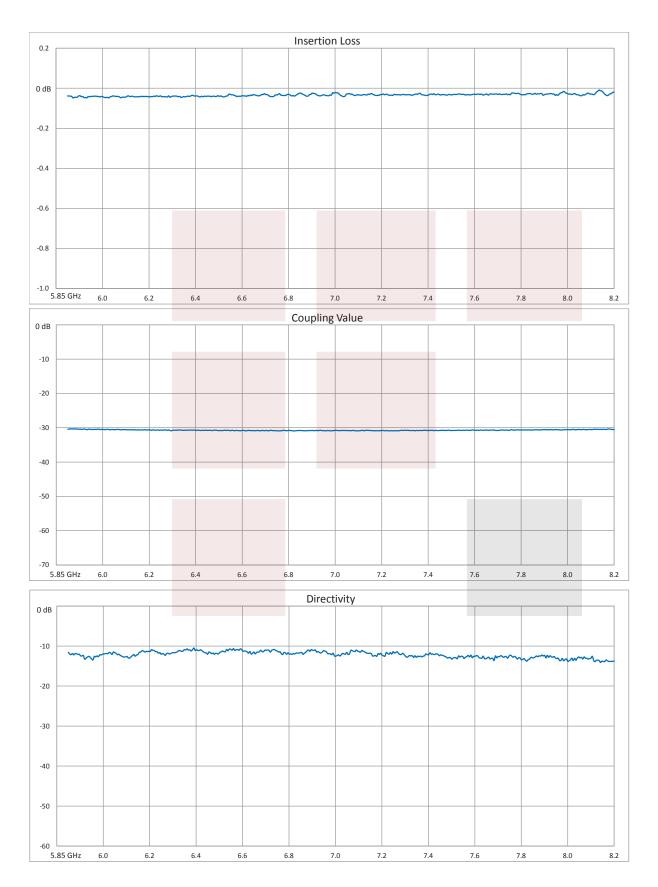





20 dB WR-137 Directional Waveguide Broadwall Coupler With UG-344/U Square Cover Flange and E-Plane Coupled Port from 5.85 GHz to 8.2 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 20 dB WR-137 Directional Waveguide Broadwall Coupler With UG-344/U Square Cover Flange and E-Plane Coupled Port from 5.85 GHz to 8.2 GHz FMWCP1030


URL: http://www.fairviewmicrowave.com/20-db-wr-137-directional-waveguide-broadwall-coupler-ug344-square-e-fmw-cp1030-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part







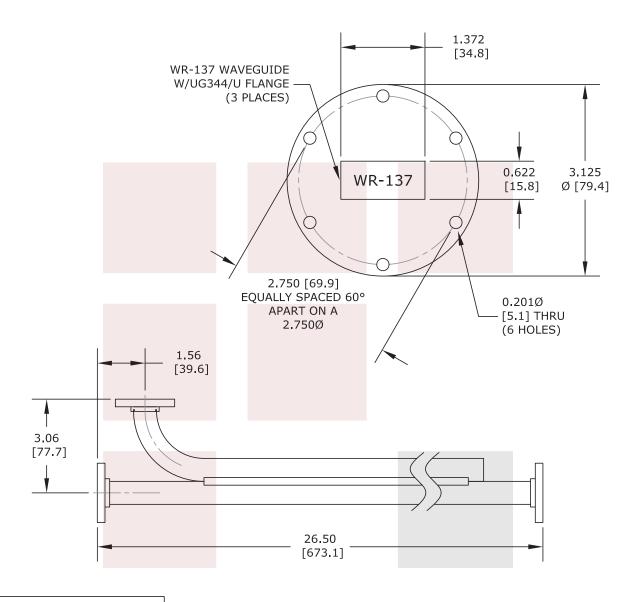

st THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE  $\ \#1$  ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].						
20 dB WR-137 Directional Waveguide Broadwall Coupler With UG-344/U Square Cover Flange and E-Plane Coupled Port from 5.85 GHz to 8.2 GHz	DWG NO FMWCP1030			CAGE CODE 3FKR5			
	CAD FILE 041316	SHEET	SCALE	N/A	SIZE A	2233	