

# FMWCT1066 DATA SHEET

## 40 dB WR-75 Waveguide Crossguide Coupler with Square Cover Flange and N Female Coupled Port from 10 GHz to 15 GHz in Bronze

The FMWCT1066 is a 40 dB WR-75 four port crossguide coupler with one coupled port terminated (making it a three port coupler) and a coax adapter on the opposite coupled port. This coupler can be mounted directly into the waveguide signal path, connected via coax to allow signal sampling / monitoring. The coupler has a typical VSWR of 1.05:1 and are made of bronze with brass Square Cover flanges. The FMWCT1066 is part of a family of cross guide couplers offered by Fairview with coupling values ranging from 20 to 50 dB. There is also a full family of top wall (broad wall) couplers. For the three port version of this coupler (terminated but no coax adapter) please see the FMWCT1018. For the four port version of this coupler (no termination, no coax adapter) please see the FMWCP1053.

### **Electrical Specifications**

Description	Min	٦	Гур	Max	Units
Frequency Range	10			15	GHz
Impedance			50		Ohms
Coupler					
Nominal Coupling Lev	el		40		dB
Directivity			15		dB
Insertion Loss			0.1		dB
Main Line VSWR		1.	05:1		
Termination					
Input Power (CW)				2.5	Watts



### Features:

- Three Port
- Crossguide Waveguide Coupler
- Terminated
- 40 dB Nominal Coupling Level
- N Female Coax Adapter
- 10 GHz to 15 GHz Frequency Range
- Waveguide Body made of Bronze with Brass Flanges
- Low VSWR

# **Applications:**

- Test Benches
- Radar
- Satellite
- Microwave Radio
- Attenuation Measurements
- Power Measurements
- Source Leveling

### **Mechanical Specifications**

### Interface

VSWR

Waveguide Size Flange Type Flange Material and Plating RF Connector Type

Waveguide to Coax Adapters

WR-75 Square Cover Brass N Female

Coupler Body Material and Plating Termination Body Material and Plating N Female Bronze Bronze

1.25:1

**Environmental Specifications** 

**Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**


Notes:

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






### **Typical Performance Data**

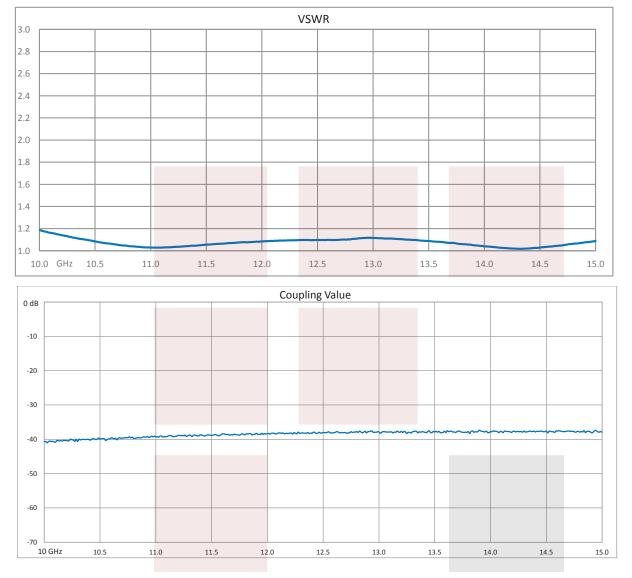

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





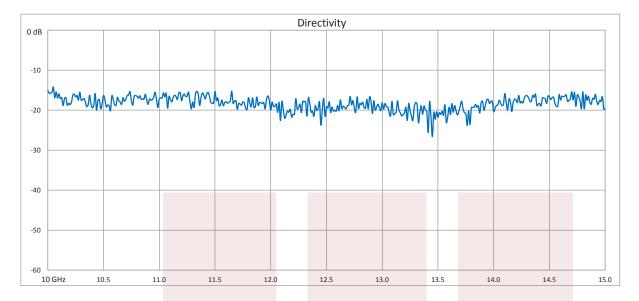

40 dB WR-75 Waveguide Crossguide Coupler with Square Cover Flange and N Female Coupled Port from 10 GHz to 15 GHz in Bronze from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 40 dB WR-75 Waveguide Crossguide Coupler with Square Cover Flange and N Female Coupled Port from 10 GHz to 15 GHz in Bronze FMWCT1066


URL: https://www.fairviewmicrowave.com/40db-wr75-waveguide-crossguide-coupler-square-n-15ghz-fmwct1066-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





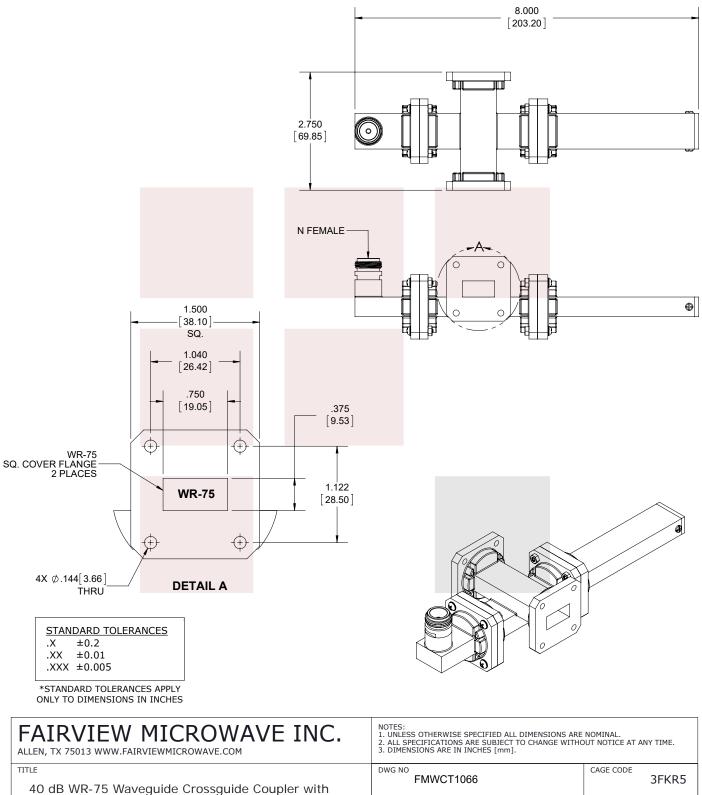

40 dB WR-75 Waveguide Crossguide Coupler with Square Cover Flange and N Female Coupled Port from 10 GHz to 15 GHz in Bronze

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

CAD FILE 062717

SHEET

1 OF 1

SCALE N/A

SIZE A

9999