

WR-28 Waveguide Gunn Oscillator at a 35 GHz Center Frequency with 3 GHz Tuning and -95 dBc/Hz Phase Noise, Ka Band, UG-599/U, Heatsink

The FMWGN1010 is a Waveguide Gunn Diode Oscillator that operates in Ka band with a center frequency of 35 GHz and wide tuning range of +/- 3 GHz by use of a mechanical tuning screw. This Indium Phosphate (InP) Gunn Diode design yields higher output power, higher efficiency, and lower AM noise than GaAs counterparts. Impressive performance at 50 ohms includes a high output power level of +15 dBm min with a harmonic response of -20 dBc typ. Additional typical performance includes Phase Noise of -95 dBc/Hz at 100 kHz offset, Frequency Stability of -0.4 MHz/°C, and Power Stability of -0.03 dB/°C. Nominal bias voltage is +4.5 Vdc with 250 mA current, and the operational temperature range is 0°C to +50°C. The compact package supports a WR-28 waveguide size with a UG-599/U flange, and incorporates an integrated heatsink for optimum thermal dissipation. Also, this highly reliable oscillator module is designed to meet a variety of MIL-STD-202 test conditions including shock, vibration, altitude, and humidity.

Electrical Specifications (TA = +25°C, Bias Voltage= 4.5V, Bias Current= 250mA)

Description	Min	Typ	Max	Units
Center Frequency		35		GHz
Tuning Range	±0	±3		kHz
Output Power	13	15		dBm
Frequency Stability		-0.4		MHz/deg C
Power Stability		-0.03		dB/deg C
Phase Noise @100kHz Offset		-95		dBc/Hz
Harmonics		-20		dBc
Bias Voltage		4.5	5	V
Bias Current		250		mA

Mechanical Specifications

Size	
Length	2.75 in [69.85 mm]
Width	1 in [25.4 mm]
Height	2 in [50.8 mm]
Weight	0.1875 lbs [85.05 g]

Configuration

Waveguide Size	WR-28
Flange	UG-599/U
Bias Connector	Pin

Environmental Specifications

Temperature

Operating Range	0 to 50 deg C
Storage Range	-40 to 100 deg C

Environment

Humidity	MIL-STD-202, Method 103B, Condition B
Shock	MIL-STD-202F, Method 213B, Condition B
Vibration	MIL-STD-202F, Method 204D, Condition B



Features:

- WR-28 Waveguide Gunn Diode Oscillator
- 35 GHz with a Tuning Range of +/- 3 GHz
- Pout: +15 dBm typ
- Harmonics: +20 dBc typ
- Phase Noise: -95 dBc/Hz typ at 100 kHz offset
- Frequency Stability: -0.4 MHz/°C typ
- Power Stability: -0.03 dB/°C typ
- Bias Voltage: +4.5 Vdc
- DC Current: 250 mA
- Waveguide Flange UG-599/U
- 0°C to +50°C Operating Temperature
- 50 Ohm Design
- Mechanical Tuning Screw
- Integrated Heatsink
- Rugged Design meets MIL-STD-202 Test Conditions

Applications:

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Doppler Sensors
- Transceivers
- Military & Commercial

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Altitude


MIL-STD-202F, Method 105C, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

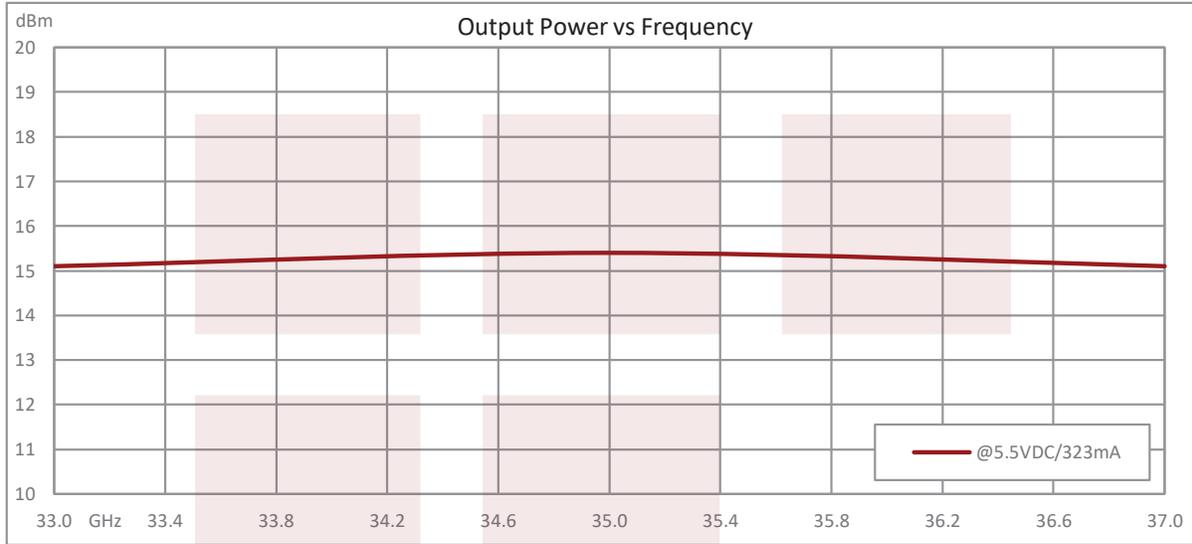



WR-28 Waveguide Gunn Oscillator at a 35 GHz Center Frequency with 3 GHz Tuning and -95 dBc/Hz Phase Noise, Ka Band, UG-599/U, Heatsink from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-28 Waveguide Gunn Oscillator at a 35 GHz Center Frequency with 3 GHz Tuning and -95 dBc/Hz Phase Noise, Ka Band, UG-599/U, Heatsink FMWGN1010](#)

URL: <https://www.fairviewmicrowave.com/wr28-waveguide-gunn-oscillator-35-ghz-center-frequency-band-ug599-fmw-gn1010-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/18/2021	T.GALLA

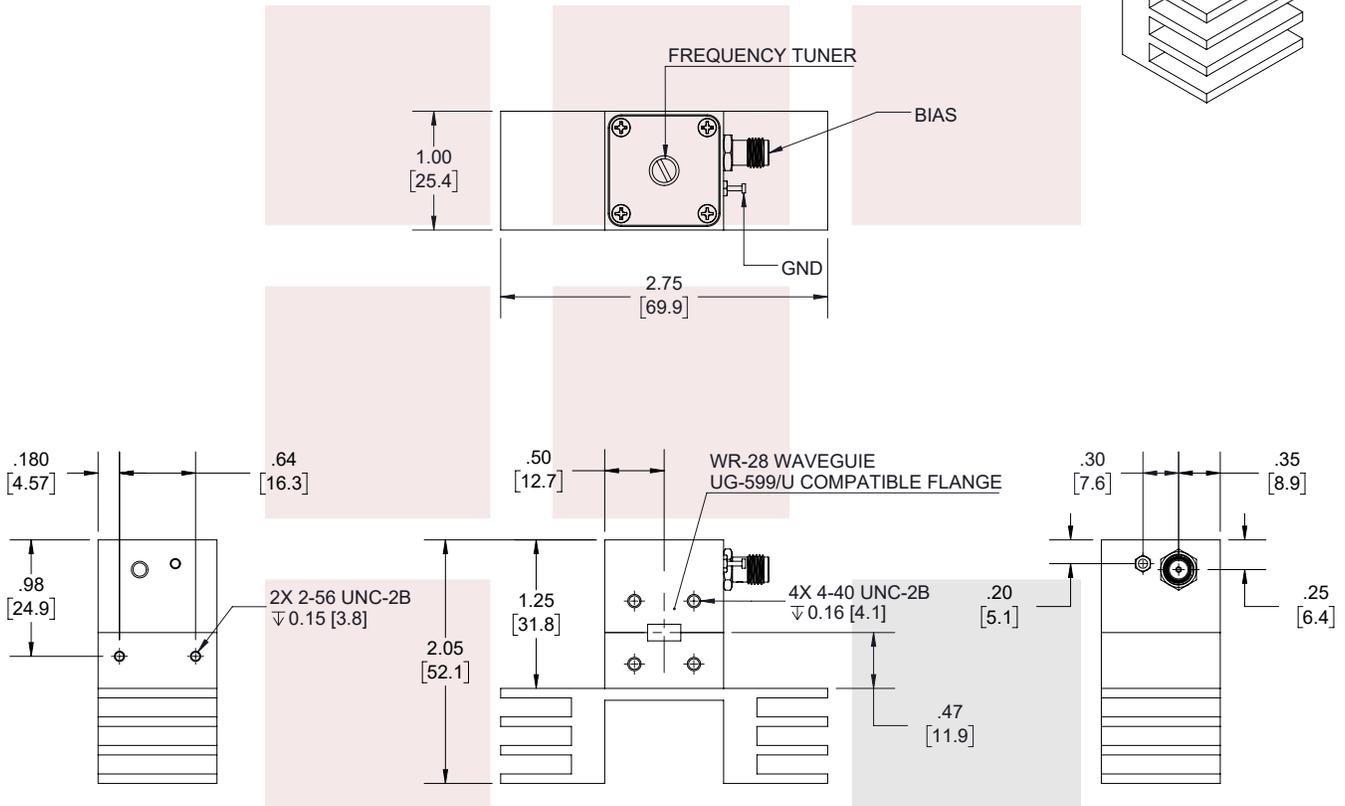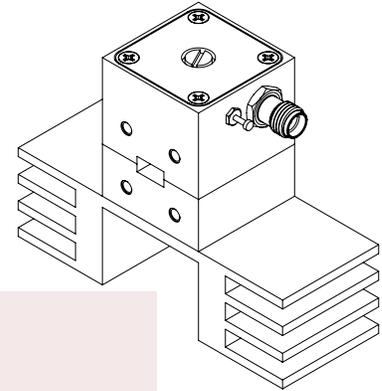

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE
WR-28 Waveguide Gunn Oscillator at a 35 GHz Center Frequency with 3 GHz Tuning and -95 dBc/Hz Phase Noise, Ka Band, UG-599/U, Heatsink

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS			
TOLERANCES:		CABLE LENGTH (L) TOLERANCES:	
X = ±2 [5.08]	FRACTIONS	L ≤ 12 [305] = +1 [25] / -0	
.XX = ±.02 [.51]	± 1/32	12 [305] < L ≤ 60 [1524] = +2 [51] / -0	
.XXX = ±.005 [.13]	ANGLES ± 1°	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	
		120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	
		300 [7620] < L = +5%L / -0	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.			
SIZE A	CAGE CODE 3FKR5	DRAWN BY K.DANG	ITEM NO. FMWGN1010
			REV A

THIRD-ANGLE PROJECTION	
THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.	
SHEET 1	OF 1
SCALE N/A	

T-Rev.D