

WR-34 Waveguide Electromechanical Relay Latching Switch SPDT/DPDT 33 GHz Max Freq., 620 Watts UG Cover, 28V, TTL, Self Cut Off

The FMWGS6041 electromechanical WR-34 waveguide switch operates across a wide frequency range from 22 GHz to 33 GHz and is configured for single pole double throw (SPDT) operation. A shorting plate on port 3 can be removed for optional double pole double throw (DPDT) operation. This innovative design features a latching TTL Logic controlled Self Cut Off actuator and patented motor drive with arc suppression. The motor drive housing supports a viewable position indicator window and a cover that can be removed for manual override access.

Impressive performance includes 0.15 dB max insertion loss, 60 dB min Isolation, 1.15:1 max VSWR, and an operating life of 250K cycles minimum. The design operates across a temperature range of -40°C to +85°C, requires +28Vdc nominal bias voltage, and has an input power rating of up to 0.62 KW CW maximum. The waveguide ports have standard UG Cover with Custom O-Ring Groove Flanges. The rugged package design is fully weatherized for up to 100% humidity exposure and supports a quick connect circular 10 pin MIL-SPEC DC bias connector with mate included.

Electrical Specifications

Switch Type	SPDT/DPDT			
Actuator Type	Latching			
Actuator Options	TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window			

Description	Min	Typ	Max	Units
Frequency Range	22		33	GHz
Operating Voltage	21	28	32	Volts
Actuating Current @ 28 Volts			1	A
VSWR			1.15:1	
Insertion Loss			0.15	dB
Isolation	60			dB
Switching Time		80		ms
Input Power (CW)			620	Watts

Mechanical Specifications

Size

Operating Life	250,000 Cycles
Operating Pressure	30 psig

Configuration

Waveguide Size	WR-34
Flange Type	UG Cover
Body Material and Plating	Aluminum, Gold
Body Plating Specification	MIL-DTL-5541

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +100 deg C



Features:

- 22 to 33 GHz SPDT Waveguide Switch
- Optional DPDT Configuration
- WR-34 Waveguide
- Insertion Loss: 0.15 dB Max
- Isolation: 60 dB min
- +28 Vdc Nominal Voltage
- Input Power Rating up to 0.62 KW CW max
- Latching TTL Logic Self Cut Off Actuator
- Position Indicator and Manual Override Access
- Fully Weatherized Package
- Quick Connect Circular DC Connector with Mate
- -40°C to +85°C Operating Temperature

Applications:

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
- VSAT
- Radar
- Space Systems
- Test Instrumentation
- Research and Development

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


Humidity 0 to 100%, Fully Weatherized


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

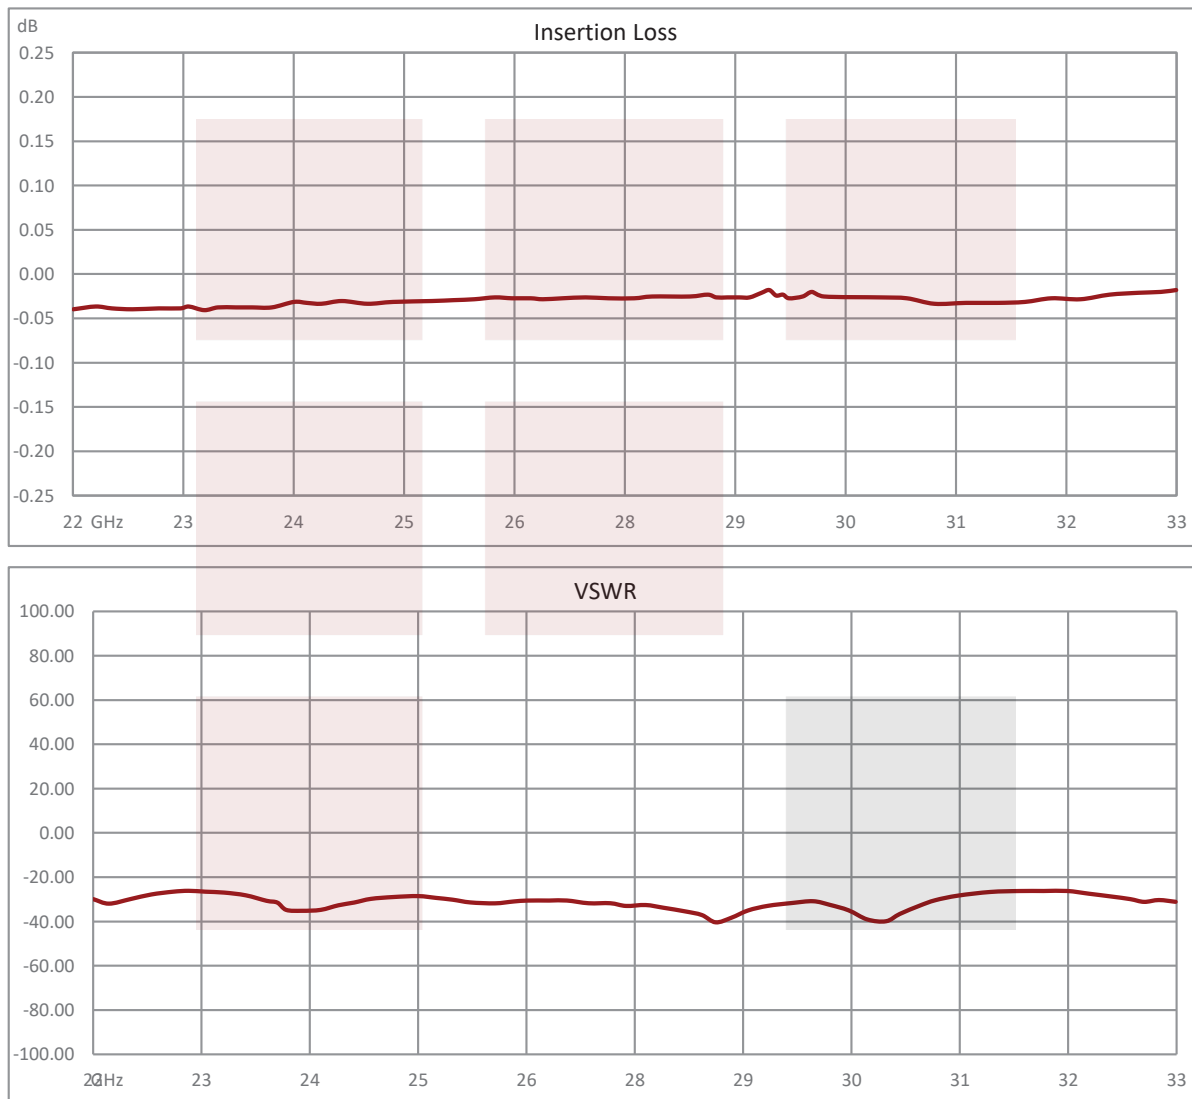

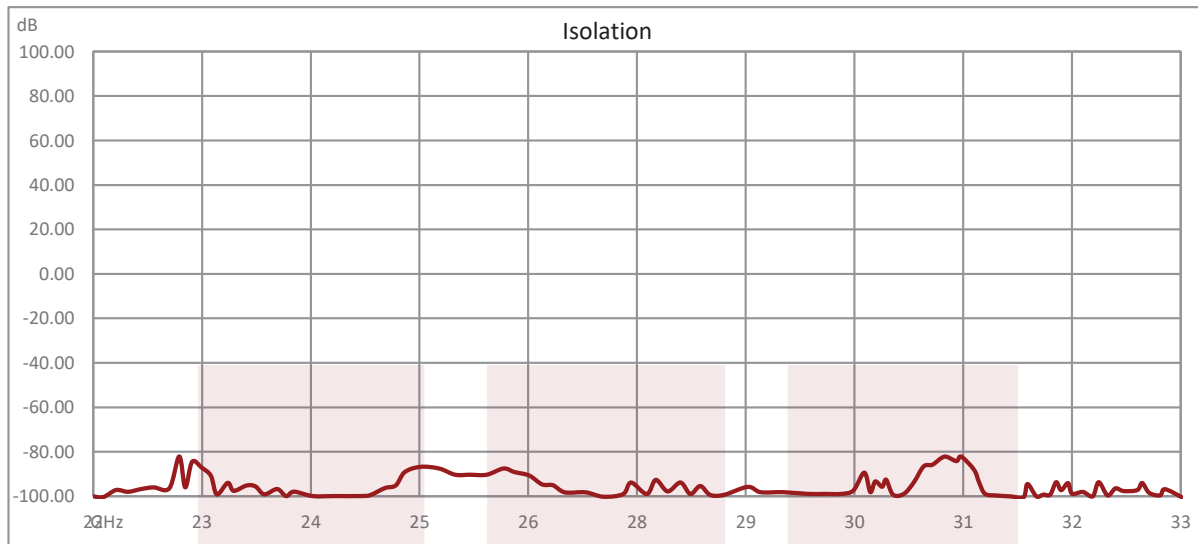


WR-34 Waveguide Electromechanical Relay Latching Switch SPDT/DPDT 33 GHz Max Freq., 620 Watts UG Cover, 28V, TTL, Self Cut Off from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-34 Waveguide Electromechanical Relay Latching Switch SPDT/DPDT 33 GHz Max Freq., 620 Watts UG Cover, 28V, TTL, Self Cut Off FMWGS6041](https://www.fairviewmicrowave.com/wr-34-waveguide-electromechanical-relay-latching-switch-spdt-dpdt-33-ghz-fmwgs6041-p.aspx)

URL: <https://www.fairviewmicrowave.com/wr-34-waveguide-electromechanical-relay-latching-switch-spdt-dpdt-33-ghz-fmwgs6041-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

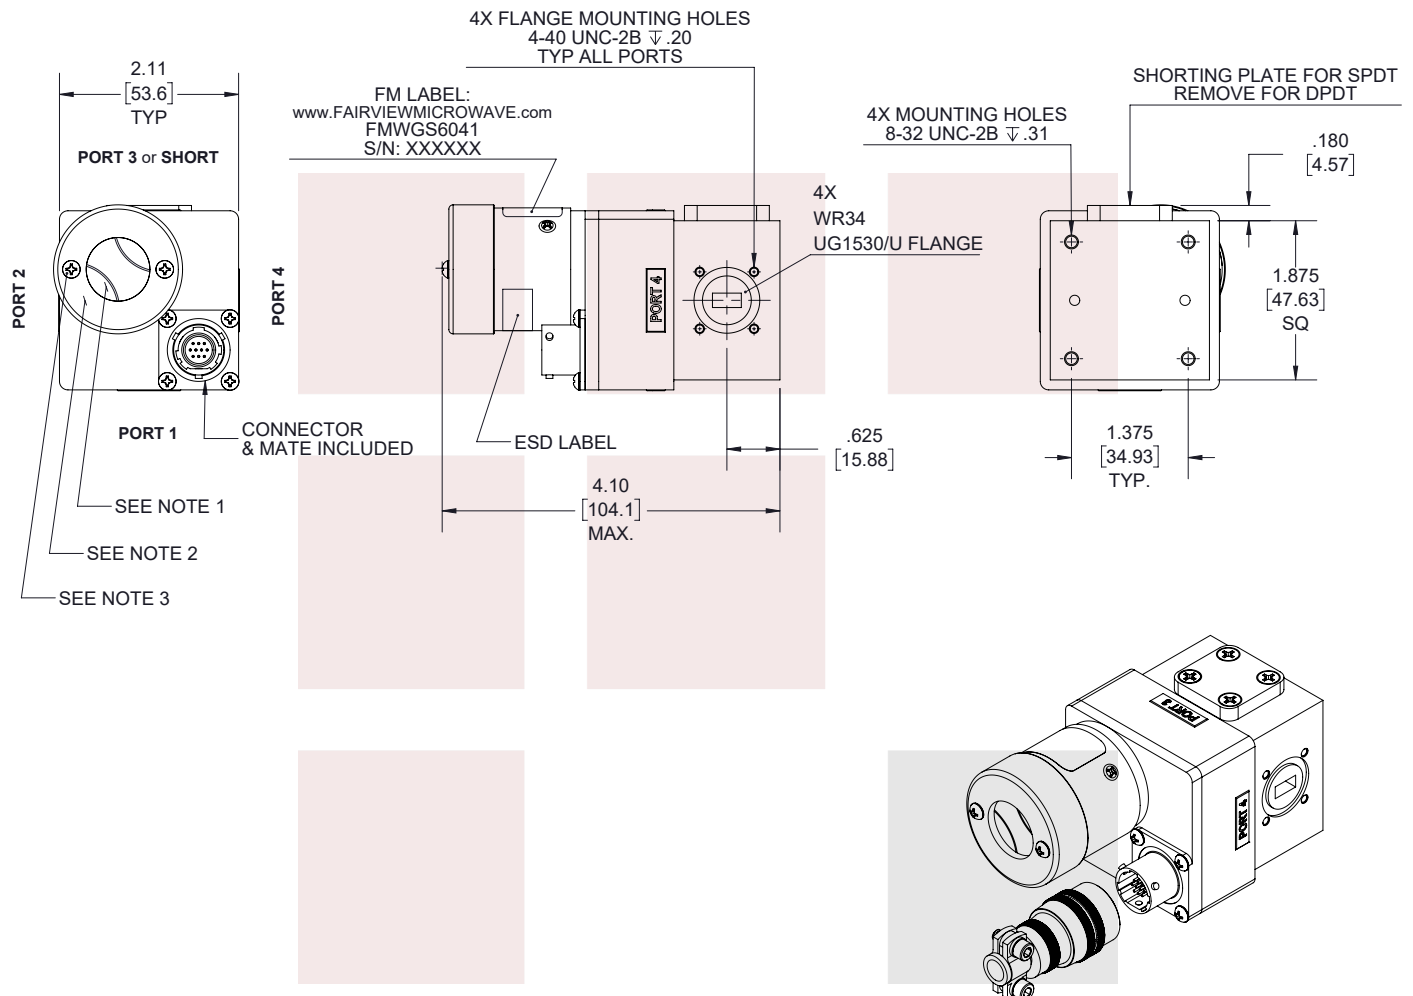

STANDARD TOLERANCES


.X ± 0.2
.XX ± 0.01
.XXX ± 0.005

NOTES:

1. MANUAL OVERRIDE & POSITION INDICATOR.
2. WEATHERIZED COVER WITH CLEAR VIEWING WINDOW.
3. FOR ACCESS TO MANUAL OVERRIDE LOOSEN (2) CAPTIVE SCREWS.

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

Fairview Microwave an INFINITE brand		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
TITLE		DWG NO		CAGE CODE		
WR-34 Waveguide Electromechanical Relay Latching Switch SPDT/DPDT 33 GHz Max Freq., 620 Watts UG Cover, 28V, TTL, Self Cut Off		FMWGS6041		3FKR5		
CAD FILE	07/29/19	SHEET	1 OF 2	SCALE	N/A	SIZE A 7361

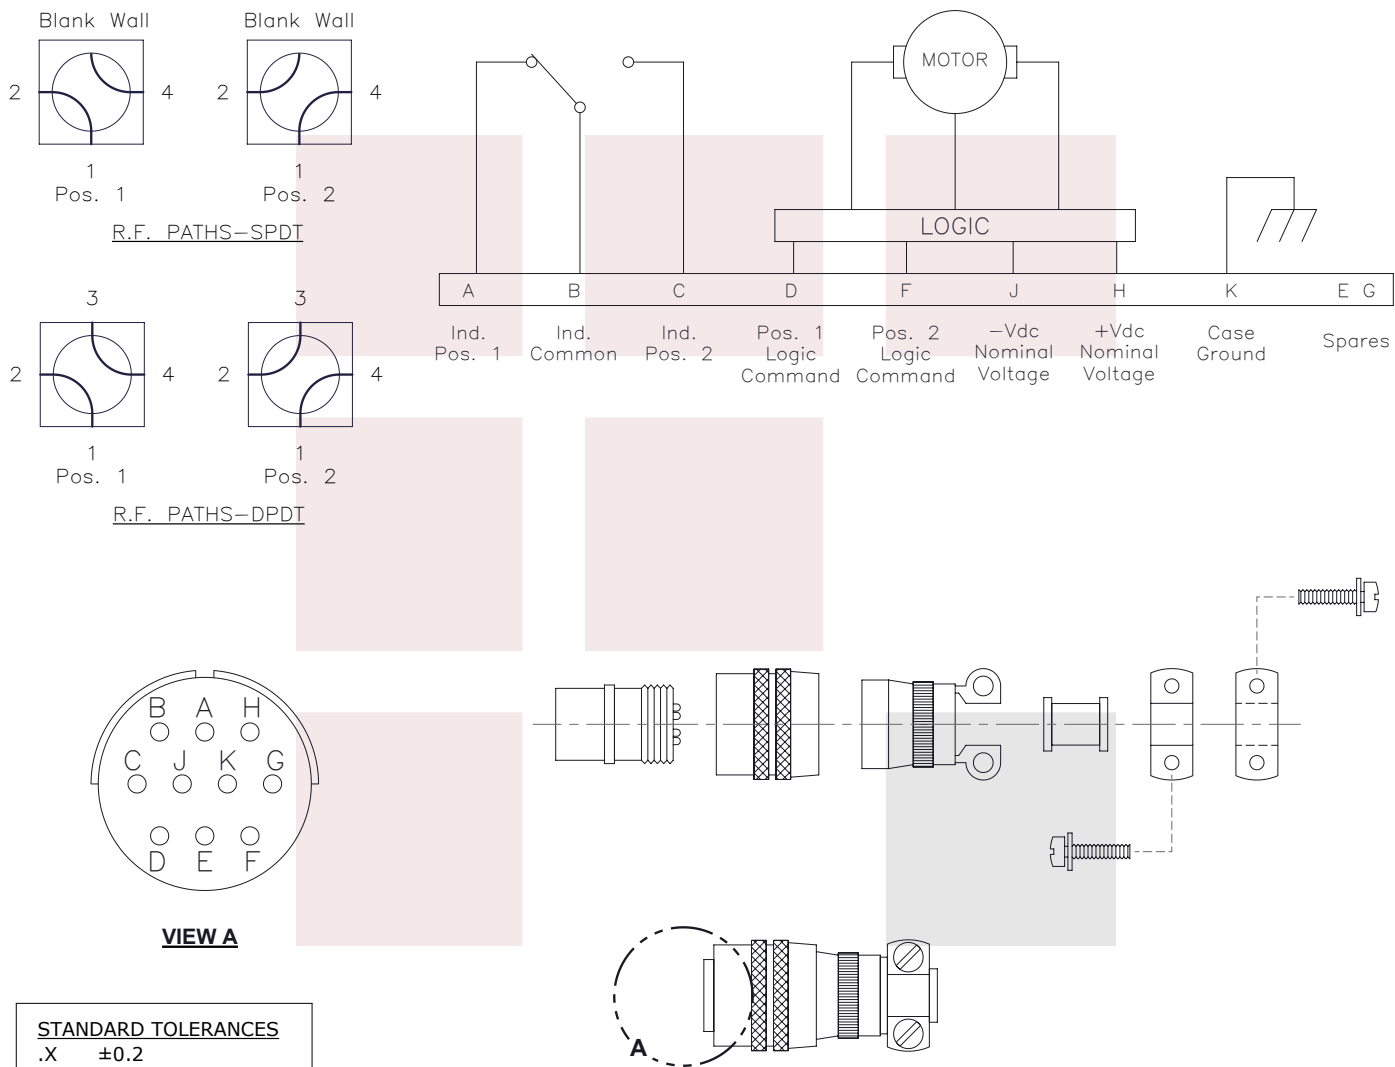

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

Fairview Microwave an INFINITE brand		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE		DWG NO		CAGE CODE			
WR-34 Waveguide Electromechanical Relay Latching Switch SPDT/DPDT 33 GHz Max Freq., 620 Watts UG Cover, 28V, TTL, Self Cut Off		FMWGS6041		3FKR5			
		CAD FILE	07/29/19	SHEET	2 OF 2	SCALE	N/A
				SIZE	A	7361	