



Inner DC Block From 10 MHz to 40 GHz With 2.92mm Connectors

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	0.01		40	GHz
Impedance		50		Ohms
VSWR		1.45:1		
Insertion Loss		0.75		dB
Operating Voltage (DC)			200	Volts



Mechanical Specifications

 Size
 0.855 in [21.72 mm]

 Width
 0.312 in [7.92 mm]

 Weight
 0.013 lbs [5.9 g]

ConfigurationInner DC BlockDesignInner DC BlockPackage TypeConnectorized

Description	Connector 1	Connector 2
Туре	2.92mm Male	2.92mm Female
Hex Size	5/16 Inch	

Compliance Certifications (visit www.FairviewMicrowave.com for current document)


REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Typical Performance Data

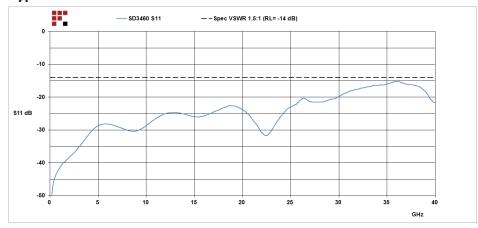

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Inner DC Block From 10 MHz to 40 GHz With 2.92mm Connectors from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Inner DC Block From 10 MHz to 40 GHz With 2.92mm Connectors SD3460

URL: https://www.fairviewmicrowave.com/inner-dc-block-10-mhz-40-ghz-2.92mm-connectors-sd3460-p.aspx

